

Power Inductor

CDH20D09D, CDH20D11D, CDH20D14D



■ Features


- ◎ Magnetically unshielded construction.
- ◎ Storage temperature range: -40°C~+105°C.
- ◎ Operating temperature range: -40°C~+105°C(including coil's self-heat).
- ◎ RoHS Compliance.

■ Applications


Ideally used in Mobilephone, PDA, MP3, DSC/DVC, HDD, etc as converter inductor.

■ Shapes and Dimensions/Recommended Land Patterns(mm)

◆ Dimensions

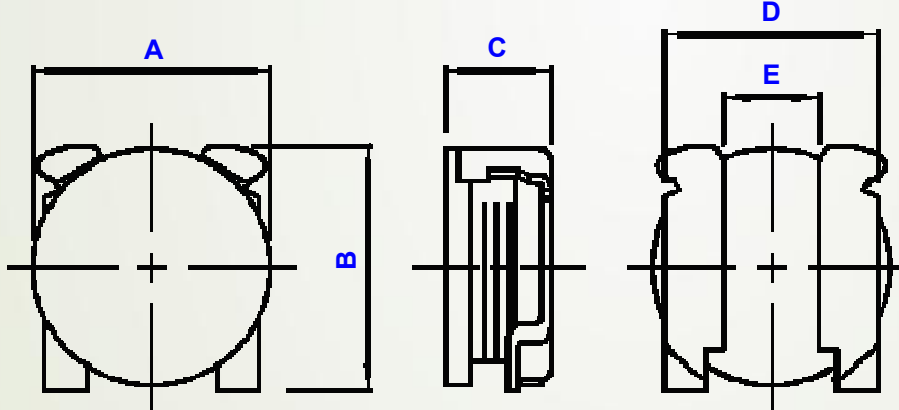

◆ Land pattern



Type name	A Max.	B Max.	C Max.	D	E	F	G	H
CDH20D09D	2.15	2.2	1.0	1.8	0.8	2.2	0.7	2.2
CDH20D11D	2.15	2.2	1.2	1.8	0.8	2.2	0.7	2.2
CDH20D14D	2.15	2.2	1.5	1.8	0.7	2.0	0.6	2.0

Power Inductor

CDH20D09D, CDH20D11D, CDH20D14D



■ Electrical Characteristics specification.

◆ CDH20D09D

Sumida P/N	Inductance (μ H) at 100KHz	D.C.R. ($m\Omega$) at 20°C	Saturation Current (A) ※1	Temperature Rise Current (A) ※2
CDH20D09DNP-R47NC	0.47 \pm 30%	40 \pm 20%	1.75	1.95
CDH20D09DNP-0R6NC	0.6 \pm 30%	55 \pm 20%	1.55	1.66
CDH20D09DNP-1R0NC	1.0 \pm 30%	85 \pm 20%	1.25	1.24
CDH20D09DNP-1R5NC	1.5 \pm 30%	132 \pm 20%	1.05	1.02
CDH20D09DNP-2R2MC	2.2 \pm 20%	195 \pm 20%	0.85	0.78
CDH20D09DNP-3R3MC	3.3 \pm 20%	305 \pm 20%	0.70	0.61
CDH20D09DNP-4R7MC	4.7 \pm 20%	475 \pm 20%	0.60	0.54
CDH20D09DNP-6R8MC	6.8 \pm 20%	775 \pm 20%	0.48	0.41

◆ CDH20D11D

Sumida P/N	Inductance (μ H) at 100KHz	D.C.R. ($m\Omega$) at 20°C	Saturation Current (A) ※1	Temperature Rise Current (A) ※2
CDH20D11DNP-R47NC	0.47 \pm 30%	49 \pm 25%	2.80	1.86
CDH20D11DNP-R63NC	0.63 \pm 30%	68 \pm 25%	2.40	1.55
CDH20D11DNP-1R0NC	1.0 \pm 30%	100 \pm 20%	1.90	1.30
CDH20D11DNP-1R4NC	1.4 \pm 30%	150 \pm 20%	1.60	0.98
CDH20D11DNP-2R2MC	2.2 \pm 20%	238 \pm 20%	1.25	0.80
CDH20D11DNP-3R3MC	3.3 \pm 20%	364 \pm 20%	1.00	0.64
CDH20D11DNP-4R7MC	4.7 \pm 20%	575 \pm 20%	0.84	0.49
CDH20D11DNP-6R8MC	6.8 \pm 20%	900 \pm 20%	0.68	0.38
CDH20D11DNP-100MC	10 \pm 20%	1175 \pm 20%	0.56	0.35

Power Inductor

CDH20D09D, CDH20D11D, CDH20D14D



■ Electrical Characteristics specification.

◆ CDH20D14D

Sumida P/N	Inductance (μ H) at 100KHz	D.C.R. ($m\Omega$) at 20°C	Saturation Current (A) ※1	Temperature Rise Current (A) ※2
CDH20D14DNP-R44NC	0.44 ± 30%	43 ± 25%	2.60	1.88
CDH20D14DNP-R72NC	0.72 ± 30%	56 ± 25%	2.10	1.60
CDH20D14DNP-1R0NC	1.0 ± 30%	68 ± 25%	1.75	1.52
CDH20D14DNP-1R5NC	1.5 ± 30%	100 ± 20%	1.50	1.16
CDH20D14DNP-2R2MC	2.2 ± 20%	175 ± 20%	1.19	0.82
CDH20D14DNP-3R3MC	3.3 ± 20%	215 ± 20%	1.03	0.74
CDH20D14DNP-4R7MC	4.7 ± 20%	265 ± 20%	0.88	0.70
CDH20D14DNP-6R8MC	6.8 ± 20%	385 ± 20%	0.75	0.51
CDH20D14DNP-100MC	10 ± 20%	765 ± 20%	0.56	0.38
CDH20D14DNP-150MC	15 ± 20%	1000 ± 20%	0.47	0.32

※1、 Saturation Current: This indicates the value of D.C. current when the inductance decreases to 70% of its nominal value.

※2、 Temperature Rise Current: The actual current when temperature of coil becomes $\Delta T=40^{\circ}\text{C}$. ($T_a=20^{\circ}\text{C}$)

For More Information

Hong Kong

Tel. +852-2880-6688
FAX. +852-2565-9600

Shanghai

Tel. +86-021-58363299
FAX. +86-021-58363266

Shenzhen

Tel. +86-755-82910228
FAX. +86-755-82910338

Taipei

Tel. +886-2-27065228
FAX. +886-2-27065229

Tokyo

Tel. +81-3-5202-7112
FAX. +81-3-5202-7105

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778

Singapore

Tel. +65-6296-3388
FAX. +65-6296-3390

Malaysia

Tel. +60-3-8733-0900
FAX. +60-3-8737-7384

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720

California

Tel. +1-408-321-9660
FAX. +1-408-321-9308