

# SMD Power Inductor CDH20D11




Halogen  
Free




## Description

- Ferrite drum core construction.
- Magnetically Unshielded.
- L × W × H: 2.2 × 2.2 × 1.2 mm Max.
- Product weight: 13mg(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

## Dimension - [mm]

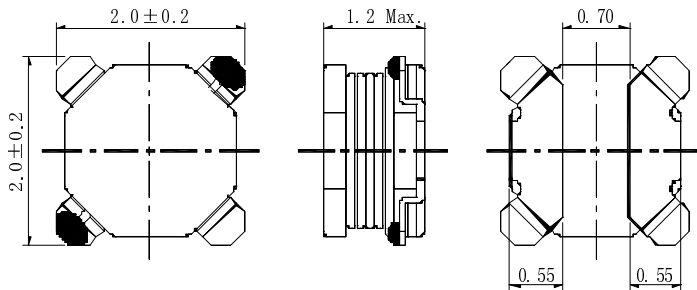

## Land pattern and Schematics - [mm]

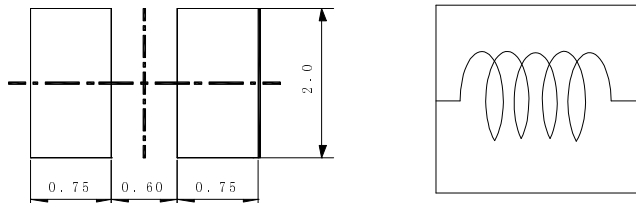

## Environmental Data

- Operating temperature range: -40°C ~ +105°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +105°C
- Solder reflow temperature: 260 °C peak.

## Packaging

- Carrier tape and reel packaging

## Applications

- Ideally used in smart phone and other portable devices.

## Electrical Characteristics

Part name	Stamp	Inductance [μ H] 1MHz	D.C.R.(Ω)[Max.] (at 20°C)	Saturation current (A) ※1 (at 20°C)	Temperature Rise current (A) ※2
CDH20D11HF-R47NC	A	0.47 ± 30%	69 m (55 m)	2.24 (2.80)	1.62
CDH20D11HF-R68NC	B	0.68 ± 30%	79 m (63 m)	2.08 (2.60)	1.45
CDH20D11HF-1R0NC	C	1.0 ± 30%	112 m (89 m)	1.63 (2.04)	1.16
CDH20D11HF-1R5NC	D	1.5 ± 30%	155 m (124 m)	1.35 (1.69)	0.95
CDH20D11HF-2R2MC	E	2.2 ± 20%	234 m (187 m)	1.15 (1.44)	0.84
CDH20D11HF-3R3MC	F	3.3 ± 20%	370 m (296 m)	0.82 (1.03)	0.58
CDH20D11HF-4R7MC	G	4.7 ± 20%	442 m (353 m)	0.73 (0.92)	0.52
CDH20D11HF-5R6MC	J	5.6 ± 20%	617 m (494 m)	0.65 (0.82)	0.48
CDH20D11HF-6R8MC	K	6.8 ± 20%	675 m (539 m)	0.61 (0.77)	0.47
CDH20D11HF-8R2MC	L	8.2 ± 20%	967 m (774 m)	0.53 (0.67)	0.37
CDH20D11HF-100MC	P	10 ± 20%	1.087 (870 m)	0.49 (0.61)	0.30

※1. Saturation current: The value of D.C. current when the inductance decreases to 70% of its nominal value.












※2. Temperature rise current: The value of D.C. current when the temperature rise is Δt=40°C (Ta=20°C).

# SMD Power Inductor CDH20D11



## Saturation Current & Temperature Rise Graph



— L (20°C) —  $\Delta T$

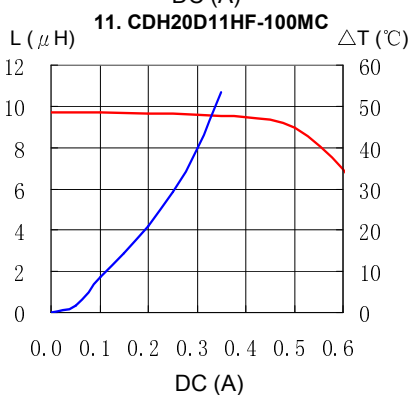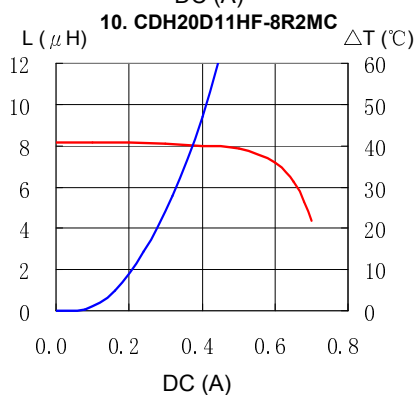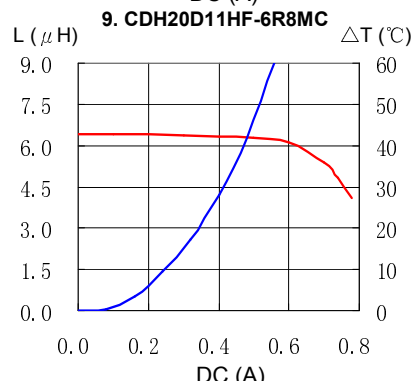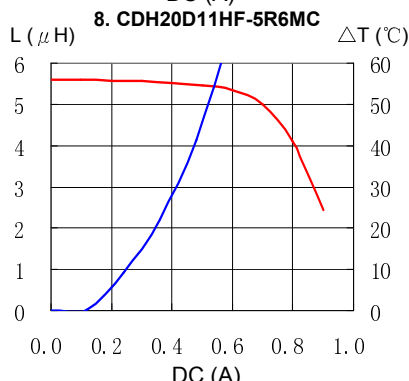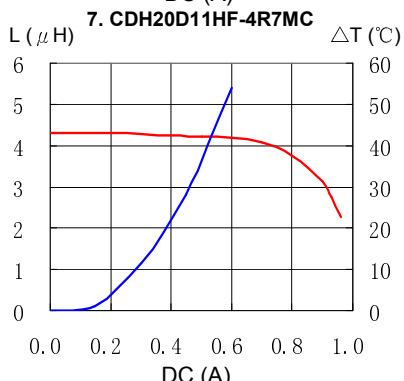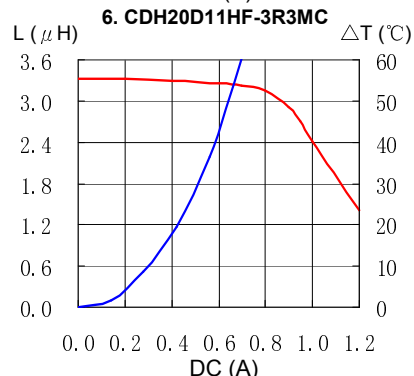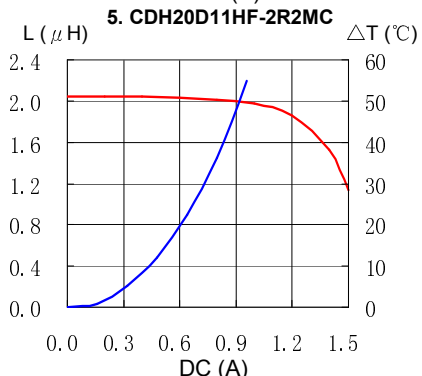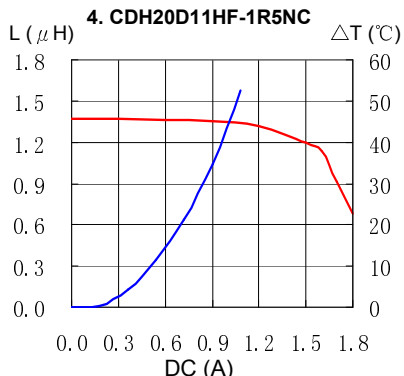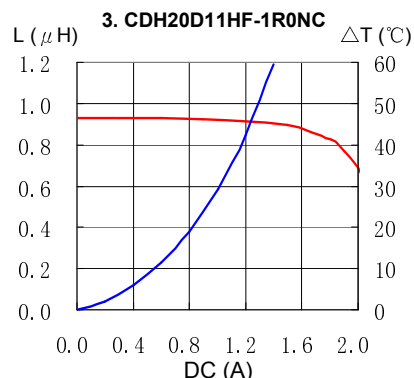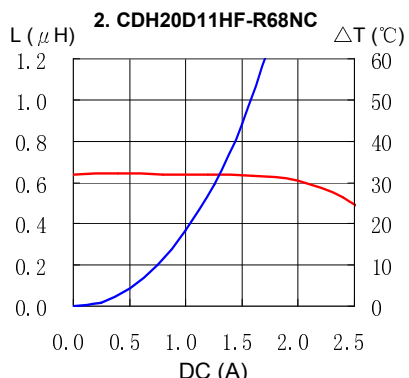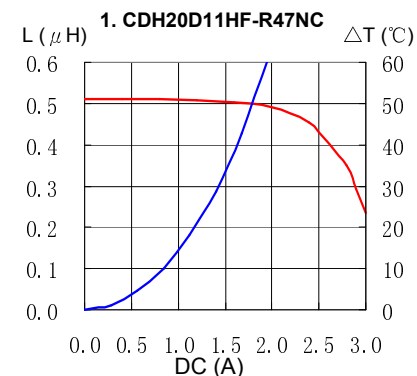

# SMD Power Inductor CDH20D11



## Solder Reflow Condition

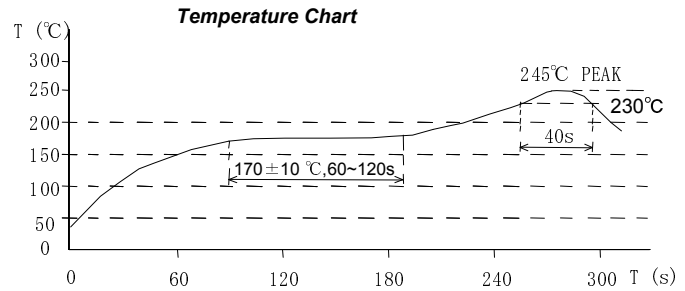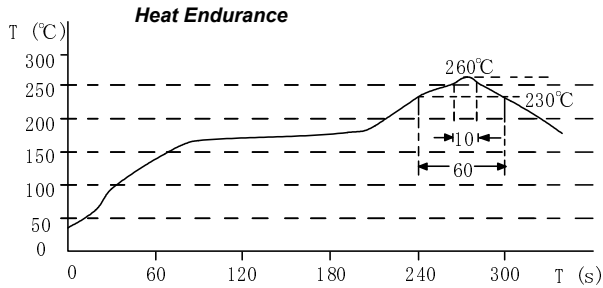

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6688  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Tokyo

Tel.+81-3-5202-7112  
FAX.+81-3-5202-7105  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX.+1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-021-5836-3299  
FAX.+86-021-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Oberzell

Tel.+49-8591-937-0  
FAX.+49-8591-937-103  
[contact@sumida-eu.com](mailto:contact@sumida-eu.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6296-3390  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX.+49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-3219660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)