

# AN6545, AN6545SP

# Low Power Loss Voltage Regulators


## ■ Overview

The AN6545 and AN6545SP are the voltage regulators with strobe pin which can turn on/off an output.


A rated load current is 150mA and an output voltage is fixed at 5V.

## ■ Features

- 150mA rated load current and 5V fixed output voltage
  - Capable of turning off an output by setting the strobe pin to the “L” level
  - Minimum input/output voltage difference:typ. 0.25V
  - Built-in overcurrent protective circuit
  - TO-126 (4-lead) package for the AN6545, and surface-mount type 5-pin SIL plastic package for the AN6545SP

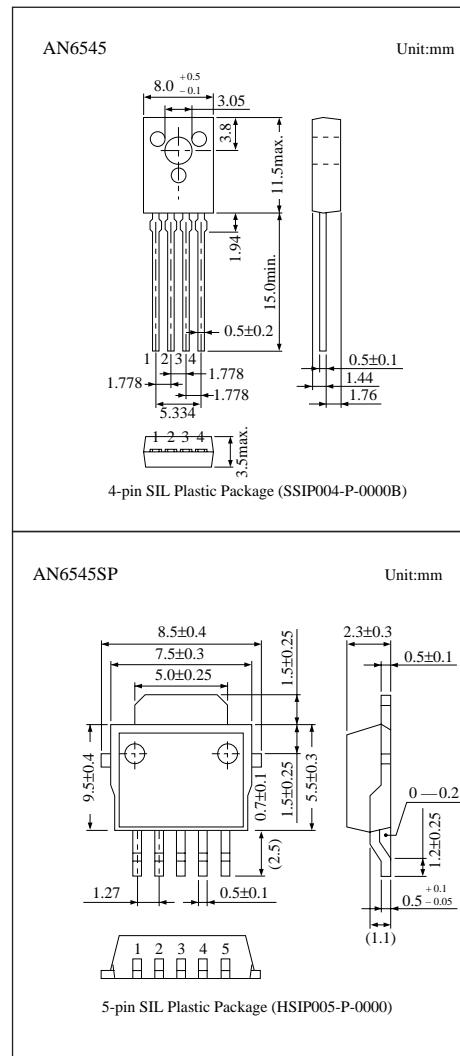

## ■ Block Diagram

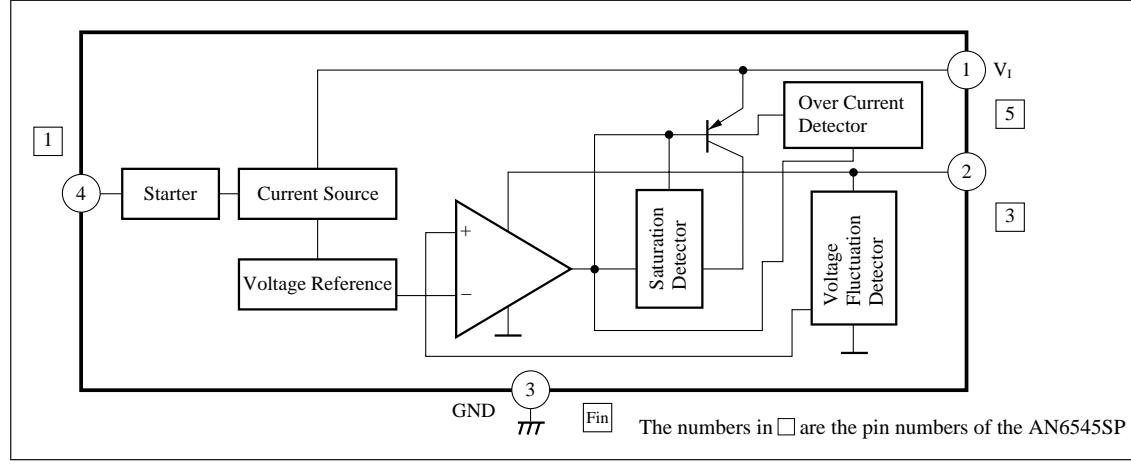

## ■ Absolute Maximum Ratings (Ta=25°C)


Parameter	Symbol	Rating	Unit
Supply voltage	V <sub>I</sub>	14.4	V
Power dissipation	P <sub>D</sub>	1300 *	mW
AN6545SP	P <sub>D</sub>	500	mW
Operating ambient temperature	T <sub>opr</sub>	-20 to+75	°C
Storage temperature	T <sub>stg</sub>	-55 to+150	°C
AN6545	T <sub>stg</sub>	-55 to+125	°C

\* Mounted onto the PCB

## ■ Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	min	typ	max	Unit
Output voltage	V <sub>O</sub>	V <sub>I</sub> =12V, I <sub>O</sub> =150mA	4.8	5	5.2	V
Output voltage range	V <sub>t</sub>	V <sub>I</sub> =6 to 14.4V, I <sub>O</sub> =0 to 150mA	4.7	5	5.3	V
Bias current	I <sub>bias</sub>	V <sub>I</sub> =12V, I <sub>O</sub> =0mA	—	2.9	4	mA
Load regulation	REG <sub>L</sub>	V <sub>I</sub> =12V, I <sub>O</sub> =0 to 150mA	—	—	100	mV
Line regulation	REG <sub>IN</sub>	V <sub>I</sub> =6 to 14V, I <sub>O</sub> =150mA	—	—	100	mV
Minimum input/output voltage difference	V <sub>DIF</sub> (min)	V <sub>I</sub> =4.5V, I <sub>O</sub> =150mA	—	—	5	V
Rush current	I <sub>rush</sub>	V <sub>I</sub> =4.5V, I <sub>O</sub> =0mA	—	2.5	—	mA
Output short-circuit current	I <sub>O</sub> (short)	V <sub>I</sub> =12V	350	—	550	mA
Load bias current change	ΔI <sub>biasl</sub>	V <sub>I</sub> =12V, I <sub>O</sub> =0 to 150mA	—	—	10	mA
Off-state cathode current	I <sub>OFF</sub>	V <sub>I</sub> =12V, V <sub>S</sub> =0V	—	—	2	μA
Strobe pin input current	I <sub>S</sub>	V <sub>I</sub> =12V, V <sub>S</sub> =2.5V	—	—	200	μA
Strobe pin threshold voltage	V <sub>S (TH)</sub>	V <sub>I</sub> =12V	0.8	2	2.4	V
Ripple rejection ratio	RR	V <sub>I</sub> =10 to 14V, I <sub>O</sub> =150mA, f=120kHz	—	55	—	dB

## ■ Application Circuit

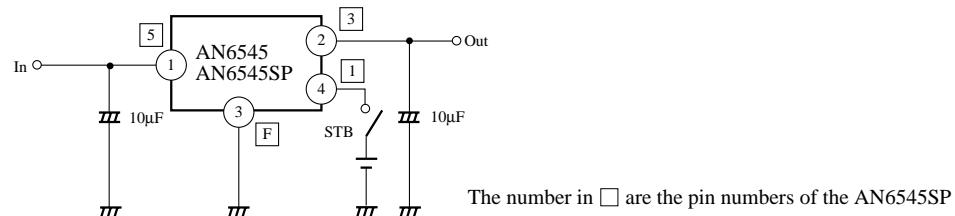

- When using at a low temperature, it is recommended to use capacitors with low internal impedance (for example, tantalum capacitors) for output capacitors.

■ Characteristics Curve

