


POWER TRANSFORMER


PC10-2400 (F) SERIES

1. CONFIGURATION & DIMENSIONS :

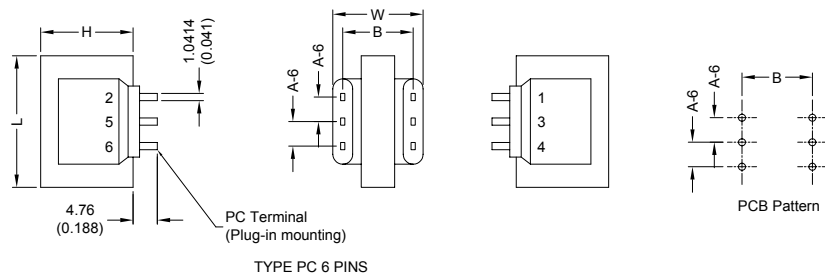

SIZE (VA)	L	W	H	A-6 6 PIN	B	WT. (gram)	OPTIONAL BRACKET *		
							NO.	MW	MD
24	41.28 (1.625)	57.90 (2.279)	34.93 (1.375)	10.16 (0.400)	53.34 (2.100)	474.87	24-BR	34.93 (1.375)	50.80 (2.000)

2. SCHEMATIC :

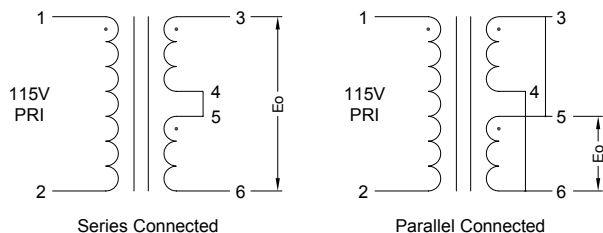

3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

- | | |
|--------------------------------------|---|
| a. Primary Voltage | AC 115 V 60 Hz . |
| b. No Load Primary Current | Less Than 50mA . |
| c. Secondary Voltage (±5%) | Series AC 12.30 V .
Parallel AC 6.15 V . |
| d. Secondary Load Current | Series 2400mA .
Parallel 4800mA . |
| e. Full Load Primary Current | Less Than - mA . |
| f. Full Load Secondary Voltage (±5%) | Series 10.00V .
Parallel 5.00V . |
| g. DC Resistance | |
| Pin 1-2 | Primary = 33.10 Ohm . |
| Pin 3-4 | Secondary = 0.34 Ohm . |
| Pin 5-6 | = 0.37 Ohm . |
| h. Insulation Resistance | DC 500V 100Meg Ohm Of More . |
| i. Withstand Voltage (Hi-Pot) | AC 1500V 60Hz 1 Minutes . |
| j. Temperature Rise | Less Than 60 Deg C . |
| k. Core Size | EI-41 x 39.00 m/m . |
| l. Turns & Wire Gauge | |
| Primary | 672 Turns Diameter 0.23 mm |
| Secondary-1 | 36 Turns Diameter 0.70 mm |
| Secondary-2 | 36 Turns Diameter 0.70 mm |



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

25.02.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 1