


PT2829 Series


Specifications:

Parameters	Units	PT2829AIW
▶ Min Sound Pressure Level at 10cm	dBa	85
Rated Voltage	V _{pp}	9
Max Operating Voltage	V _{pp}	40
Resonance Frequency	Hz	4000
Capacitance at 1000Hz	pF	25000 ± 30%
Operating Temperature	°C	-20 - +60
Case Material	-	Aluminum
Weight	g	2.0



▶ Value applying rated voltage and resonance frequency


Unit: mm • Tolerance: ±0.5mm

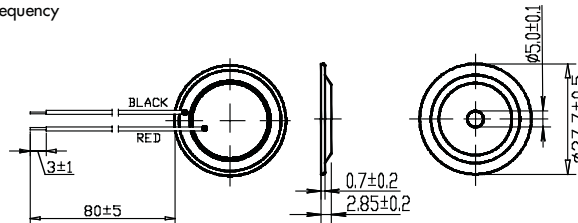

PT3045 Series


Specifications:

Parameters	Units	PT3045AAW
▶ Min Sound Pressure Level at 10cm	dBa	90
Rated Voltage	V _{pp}	10
Max Operating Voltage	V _{pp}	30
Resonance Frequency	Hz	4000
Capacitance at 100Hz	pF	25000 ± 30%
Operating Temperature	°C	-20 - +60
Case Material	-	ABS
Weight	g	4.0



▶ Value applying rated voltage and resonance frequency

Unit: mm • Tolerance: ±0.5mm

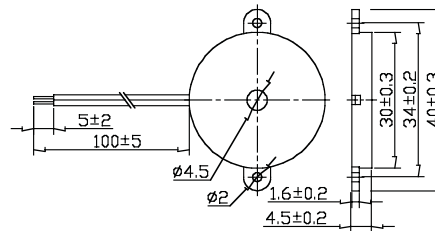

PT3070 Series

Specifications:

Parameters	Units	PT3070AAP
▶ Min Sound Pressure Level at 10cm	dBa	90
Rated Voltage	V _{pp}	10
Max Operating Voltage	V _{pp}	30
Resonance Frequency	Hz	3000
Capacitance at 120Hz	pF	35000 ± 30%
Operating Temperature	°C	-20 - +60
Case Material	-	ABS
Weight	g	5.0



▶ Value applying rated voltage and resonance frequency

Unit: mm • Tolerance: ±0.5mm

