


RG25P Series Centrifugal Blower

Ø 250mm


- AC single inlet, forward curved centrifugal blower in standard housing. The integrated external-rotor motor is mounted inside the housing.
- Direction of rotation is CW as seen from inlet side. Insulation class "F".
- Housing and impeller made of galvanized sheet-steel. Forward curved impellers are directly press-fitted onto the rotor of the external-rotor motor.
- Maintenance-free ball bearings.
- UL, CSA, VDE approvals on some models, please contact application engineering.

Part Number	Curve	CFM @ 0	VAC	Hertz	Power (W)	dBA	Max Amb. Temp. C	Bearing Type	Features	Capacitor (µF)	Wgt. (lbs)
RG25P-4/106482	1	1250	115	60	1100	96	40	Ball	Leads	60	32.0
RG25P-4/106483	1	1250	230	60	1100	96	40	Ball	Leads	16	32.0

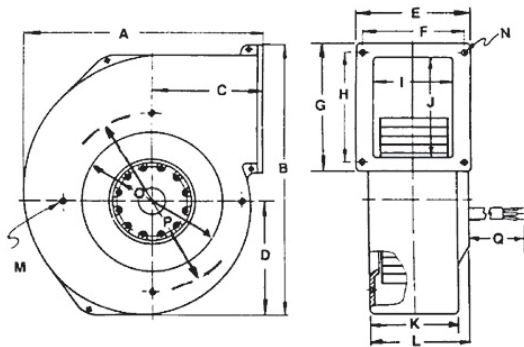

DIMENSIONS - inches (mm)

PART NUMBER	A	B	C	D	E	F	G	H
RG25P	16.42 (417)	19.13 (486)	7.68 (195)	7.87 (200)	8.66 (220)	6.93 (176)	15.04 (382)	12.44 (316)
	I	J	K	L	M	N	Q	
	6.46 (164)	12.52 (318)	6.46 (164)	10.43 (265)	M12	.39 (10)	17.72 (450)	

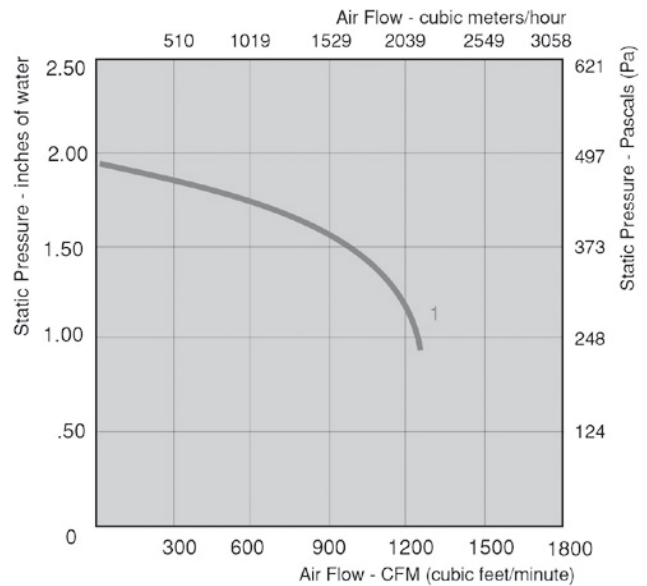

e-mail: sales@us.ebmpapst.com · TEL: 860-674-1515 · FAX: 860-674-8536

ebm-papst Inc., 100 Hyde Road, Farmington, CT 06034 USA

ebm-papst Inc., 2004 © ebm-papst Inc. reserves the right to change any specifications or data without notice