


RG28P Series Centrifugal Blower

Ø 280mm


- AC single inlet, forward curved centrifugal blower in standard housing. The integrated external-rotor motor is mounted inside the housing.
- Direction of rotation is CW as seen from inlet side. Insulation class "F".
- Housing and impeller made of galvanized sheet-steel. Forward curved impellers are directly press-fitted onto the rotor of the external-rotor motor.
- Maintenance-free ball bearings.
- UL, CSA, VDE approvals on some models, please contact application engineering.

Part Number	Curve	CFM @ 0	VAC	Hertz	Power (W)	dBA	Max Amb. Temp. C	Bearing Type	Features	Capacitor (µF)	Wgt. (lbs)
RG28P-4/106484	2	1100	230	60	1800	90	40	Ball	Leads	25	50.0

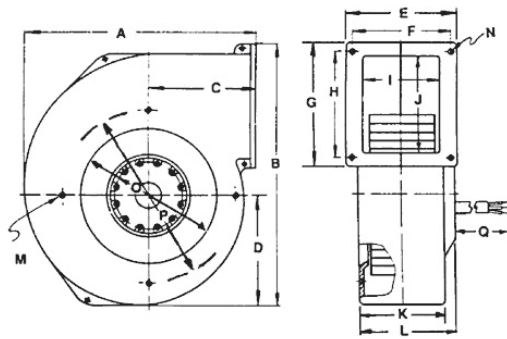

DIMENSIONS - inches (mm)

PART NUMBER	A	B	C	D	E	F	G	H
RG28P	18.23 (463)	20.78 (528)	8.46 (215)	8.27 (210)	9.57 (243)	6.93 (176)	16.57 (421)	12.44 (316)
	I	J	K	L	M	N	Q	
	7.24 (184)	14.09 (358)	7.24 (184)	11.50 (292)	M12	.39 (10)	17.72 (450)	

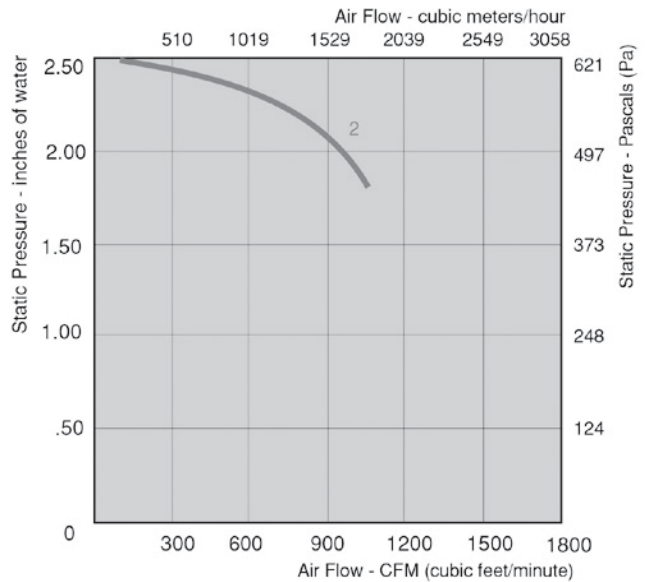

ebmpapst

e-mail: sales@us.ebmpapst.com · TEL: 860-674-1515 · FAX: 860-674-8536

ebm-papst Inc., 100 Hyde Road, Farmington, CT 06034 USA

ebm-papst Inc., 2004 © ebm-papst Inc. reserves the right to change any specifications or data without notice