


SL4 Series Single-In-Line Passive Single Output 50 Ω Impedance Delays

SL4 Schematic Diagram

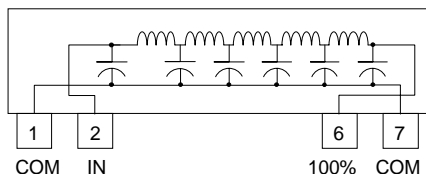

OPERATING SPECIFICATIONS

Pulse Overshoot (Pos) 5% to 10%, typical
 Pulse Distortion (S) 3% typical
 Attenuation 0.5 dB maximum
 Working Voltage 25VDC maximum
 Dielectric Strength 100VDC minimum
 Insulation Resistance 1,000 Megohms min. @ 100VDC
 Temperature Coefficient 70 ppm/°C, typical
 Band Width (f_c)35/tr approx.
 Operating Temperature Range -55° to +125°C
 Storage Temperature Range -65° to +150°C

TEST CONDITIONS

(Measurements made at 25°C)

Input Rise Time 2.0 ns max.
 Input Pulse Period 500 ns
 Input Pulse Width 1000 ns


ENVIRONMENTAL

All units are designed to meet the applicable portions of MIL-D-23859, MIL-D-83531 and are capable of meeting the environmental requirements of MIL-STD-202 for moisture resistance, vibration shock, humidity and life.

Electrical Specifications at 25°C ^{1,2,3}

Delay (ns)	Rise Time 10% - 90% max. (ns)	DCR max. (Ohms)	7-Pin SIP Style Single 55 Ohm P/N
1.0 ± 0.2	1.0	0.3	SL 4 - 1 - 50
1.5 ± 0.3	1.0	0.3	SL 4 - 1P5 - 50
2.0 ± 0.5	1.0	0.3	SL 4 - 2 - 50
2.5 ± 0.6	1.0	0.4	SL 4 - 2P5 - 50
3.0 ± 0.6	1.0	0.4	SL 4 - 3 - 50
3.5 ± 0.7	1.0	0.5	SL 4 - 3P5 - 50
4.0 ± 0.8	1.0	0.5	SL 4 - 4 - 50
4.5 ± 0.8	1.0	0.6	SL 4 - 4P5 - 50
5.0 ± 1.0	1.0	0.7	SL 4 - 5 - 50
6.0 ± 1.0	1.5	0.8	SL 4 - 6 - 50
7.0 ± 1.0	1.6	0.8	SL 4 - 7 - 50
7.5 ± 1.0	1.7	0.9	SL 4 - 7P5 - 50
8.0 ± 1.0	1.8	0.9	SL 4 - 8 - 50
9.0 ± 1.0	1.9	0.9	SL 4 - 9 - 50
10 ± 1.0	2.0	1.0	SL 4 - 10 - 50
11 ± 1.0	2.2	1.1	SL 4 - 11 - 50
12 ± 1.0	2.4	1.2	SL 4 - 12 - 50
13 ± 1.0	2.8	1.3	SL 4 - 13 - 50
14 ± 1.0	3.0	1.5	SL 4 - 14 - 50
15 ± 1.0	3.0	1.6	SL 4 - 15 - 50
16 ± 1.0	3.3	1.6	SL 4 - 16 - 50
20 ± 1.0	4.0	1.7	SL 4 - 20 - 50
25 ± 1.3	5.0	1.7	SL 4 - 25 - 50
30 ± 1.5	9.0	1.7	SL 4 - 30 - 50
35 ± 1.8	10.5	1.8	SL 4 - 35 - 50
40 ± 2.0	12.5	1.8	SL 4 - 40 - 50
50 ± 2.5	15.0	1.8	SL 4 - 50 - 50

1. Delays measured at 50% Level on the Leading Edge
2. Impedance, Z_0 , 50 Ohms ± 10 %
3. Output terminated to ground through $R_L = Z_0$

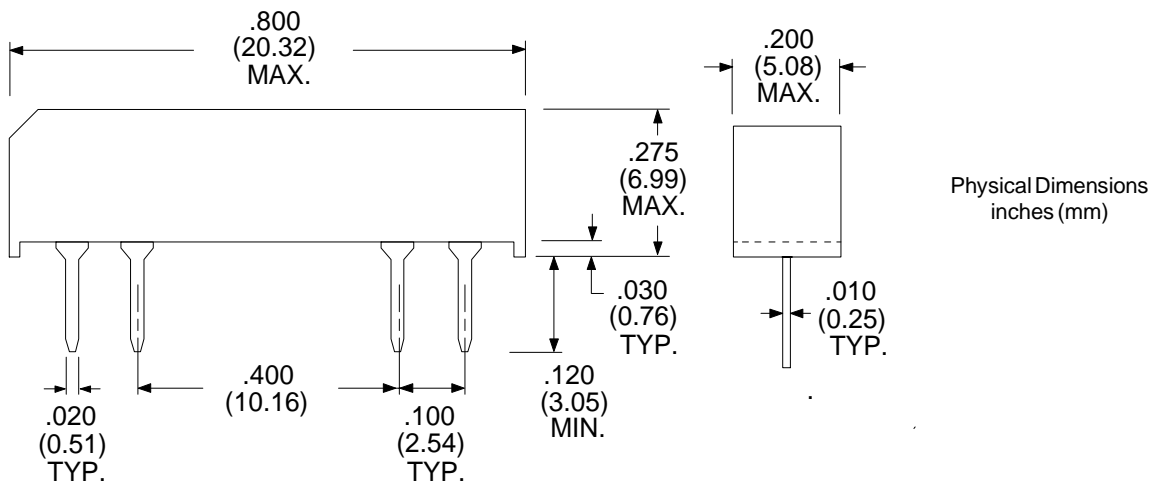

RHOMBUS P/N: 50 Ohm SL4 Series	
CUST P/N:	NAME:
DATE: 01/09/98	SHEET: 1 OF 1