



Specification

All exposed cast aluminum components are made of non corrosive pure aluminum copper free (Aluminum is less than .1% copper content.#356 alloy.)

Finish: All polyester powder baked coatings preceded with a 5 baths preparation process. Meets military grade MIL-C781706 with a 2000 hours salt spray test.

- 75W/600V thermoplastic compact fluorescent socket.
- One-piece molded silicone gasket with memory retention.
- 98% P.F.electronic smart ballast with end of life detection for compact fluorescent.
- All stainless steel hardware.
- All Moving and removable parts are sealed with a memory retention silicone gasket.

- 1 - One piece cast aluminum removable housing for ease of access to lamp and ballast.
- 2- White translucent sealed high impact acrylic diffuser.
- 3 - Isolated ballast compartment for compact fluorescent electronic ballast.
- 4- Multiple cast aluminum louver blades built in assembly.

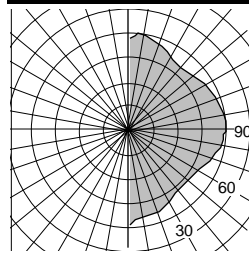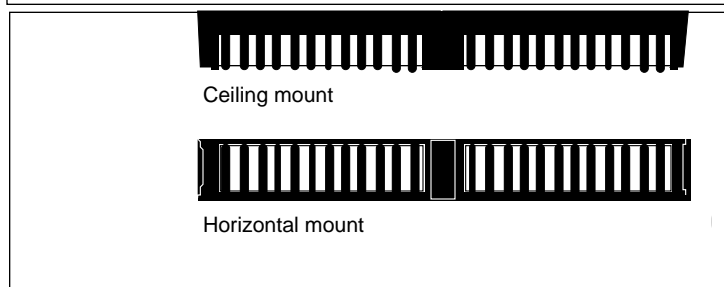



Separate updated technical specification sheets with related models and light sources with I.E.S formatted photometry are available on www.luminis.com.

Certification

UL. Wet Location.

Mounting

Max. weight: 13 lbs.
Installation: Mounts over a standard 4" octagonal electrical box with 3 1/2" c/c mounting holes. (by others) additional separate mounting holes are provided with wall plate.

Model#	Light source selection	Voltage	Finish	Options
<input type="checkbox"/> SL102 	<input type="checkbox"/> PL-L 2G11 <input type="checkbox"/> Two lamps <input type="checkbox"/> F224 (2x24W) <input type="checkbox"/> (Lamps by others)	<input type="checkbox"/> COMP. FLUO. <input type="checkbox"/> Smart ballast 120/277 <input type="checkbox"/> 347 V (To specify)	Standard selection <input type="checkbox"/> WHT: Snow white <input type="checkbox"/> BKT: Jet black <input type="checkbox"/> BZT: Bronze <input type="checkbox"/> GRT: Titanium gray <input type="checkbox"/> DGT: Gun metal <input type="checkbox"/> CHT: Champagne <input type="checkbox"/> MST: Matte silver <input type="checkbox"/> GNT: Forest green Optional colors <input type="checkbox"/> CS: Custom color <input type="checkbox"/> RAL: RAL# color	<input type="checkbox"/> SC Round column adaptor  Indicate column diameter in inches. 12" Min. dia. Ex: SC24 (24"Dia..)

luminaires may be altered for design improvements or discontinued without prior notice.