


Part Number: SL12 10004

### Ordering Different Lead Types:

Inside Kinked Leads	Use <b>-A</b> after Ametherm's part #
Outside Kinked Leads	Use <b>-B</b> after Ametherm's part #

For example: to order an inside kinked lead use part number SL12 10004-A

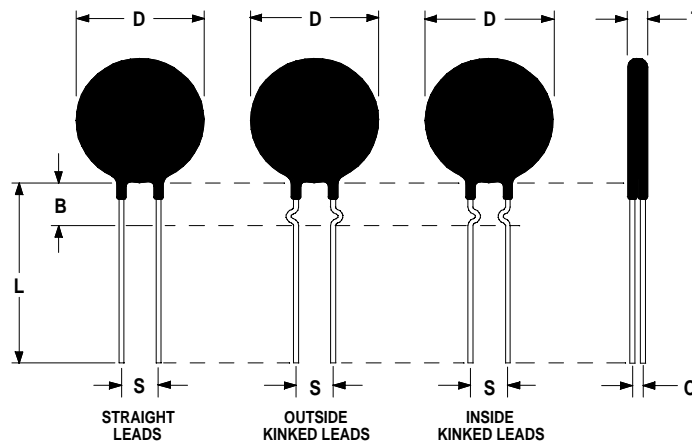

### Electrical Specifications:

Resistance @ 25°C	10.0 $\Omega$ $\pm$ 20%
Max Steady State Current Up to 65°C	4.0 A
Max Recommended Energy Rating (Joules)	40.0 J
Actual Failure Point of Instantaneous Energy (Joules)	80.0 J
Resistance @ 100% of Max Current	0.190 $\Omega$
Resistance @ 50% of Max Current	0.478 $\Omega$
Body Temperature @ 100% Current Rating	162 °C
Dissipation Constant	12.7mW/°C
Thermal Time Constant	47 seconds
Material Type	"C"
Max Recommended Capacitance @ 120VAC/240VAC	2700 $\mu$ F/ 690 $\mu$ F

### Mechanical Specifications:

D	12.0 $\pm$ 0.5 mm
T	7.0 mm Max
Lead Diameter	0.8 $\pm$ 0.1 mm
S	7.8 $\pm$ 2.0 mm
L	38.0 $\pm$ 9.0 mm
Inside Kink Dimension	See Dimension B Below
B	6.35 $\pm$ 0.60 mm
C	2.82 $\pm$ 0.5 mm

CSA File Number: #CA118061

Revision Date: March 19, 2003

**Ametherm, Inc.** 3111 N. Deer Run Road #4 Carson City, NV 89701  
 Telephone: (800) 808-2434 (775) 884-2434 Fax: (775) 884-0670

[www.ametherm.com](http://www.ametherm.com)