



FERROXCUBE



HOLE PATTERN:

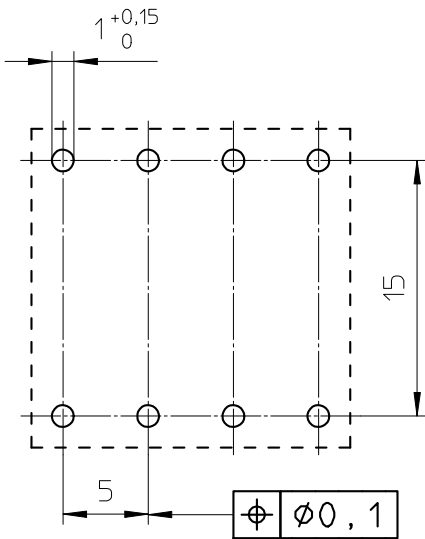

Coil former material: Sumikon PM-9630 (PF), glass-reinforced.
UL file number: E41429(M) - UL94V-0.

Pin material: Copper-clad steel, Sn plated.


Max. operating temp.: acc. to IEC 85 class H, 180°C.

Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1A, 260°C - 5s.

Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2s.

Min. winding area: 17,4 mm².

Mean length of turn: 28,9 mm.



CLASS.NO.									96-06-07	
									96-09-20	
									97-01-29	
									98-01-28	
									06-06-28	
NAME NAAM	A.Wojtasz	SUPERS. VERV.		1	SH BL.	SH BL.	112	- 001	010	A4
MPA	CHECK CONTR.	DAT.	96-06-07	Property of Eigendom van		© FERROXCUBE 2000				