
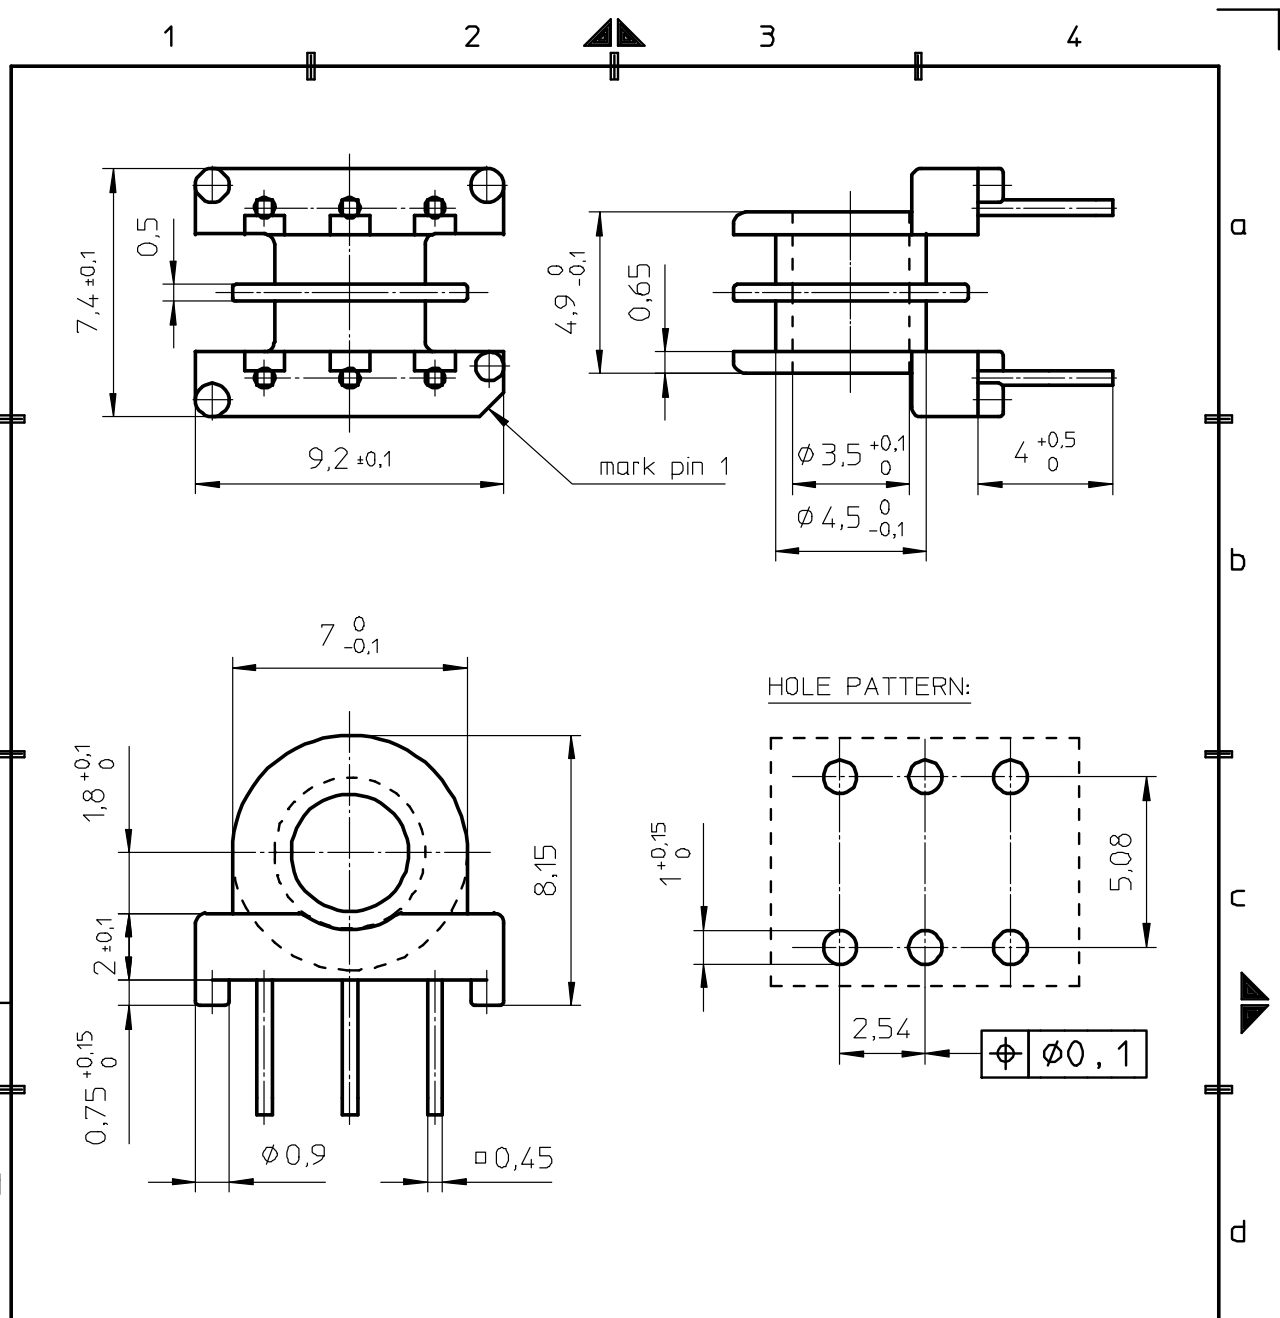



**FERROXCUBE**



Coil former material:	Sumikon PM9820 (PF), glass-reinforced.
	UL file number: E41429 - UL94V-0.
Pin material:	Copper-clad steel, Sn plated.
Max. operating temp.:	acc. to IEC 60 085 class H, 180°C.
Resistance to soldering heat:	acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3.5s
Solderability:	acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s
Min. winding area:	3.4 mm <sup>2</sup> .
Mean length of turn:	17.9 mm.

CLASSNO.	CSH-EP7-2S-6P-T	4322 021 01701	<del>96-04-22</del>
			<del>96-09-03</del>
96-09-03			<del>99-10-06</del>
			2004-09-28
NAME NAAM	J.T.ion	SUPERS. VERV.	1 SH SH 112 - 001 010
MPA	CHECK CONTR.	DAT.	96-04-22
		Property of Eigendom van	© FERROXCUBE 2000

**A4**