

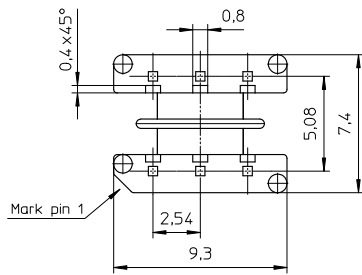

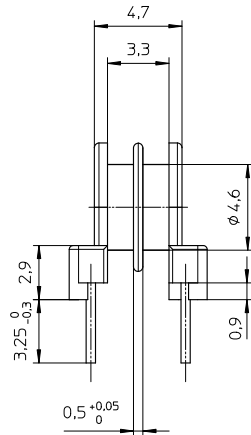


1 2 3 4 5 6 7 8

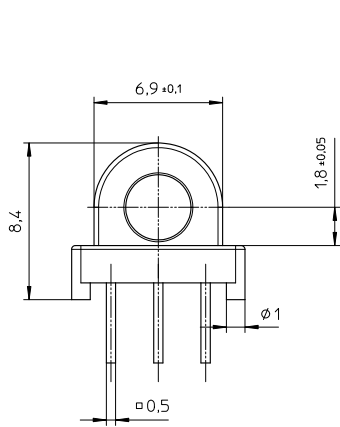

Hole Pattern Proposal:



Coil former material: Sumikon PM9630 (PF), glass-reinforced.
 UL file number: E41429 - UL94V-0.
 Pin material: Copperclad steel, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3.5s.
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.
 Min. winding area: 3.5 mm²
 Mean length of turn: 18 mm.

CLASSNO.		CSH-EP7-2S-6P-TZ		4322 021 06531		23-01-2006
						06-03-2006
						31-08-2006
NAME	A. Wojtasz	SUPPL. DESK.	1	SPR	112 - 001	A3
MPA	CHECK	DATE	02-01-2006	Property of	© FERROXCUBE 2000	

1 2 3 4