

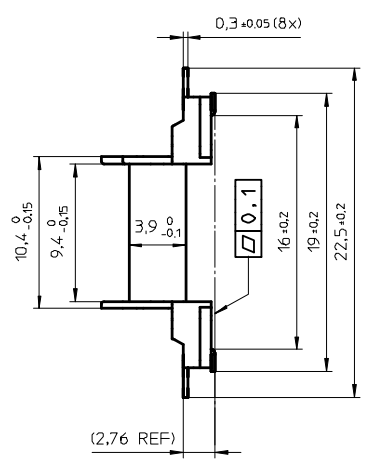
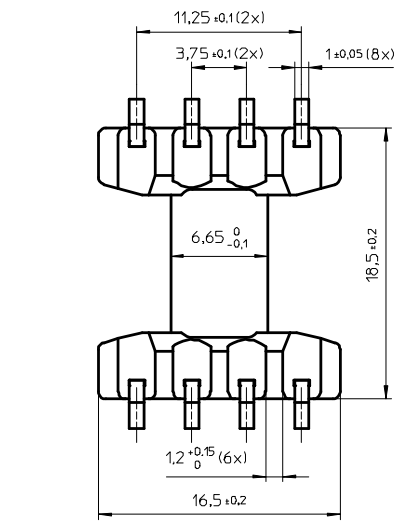


FERROXCUBE

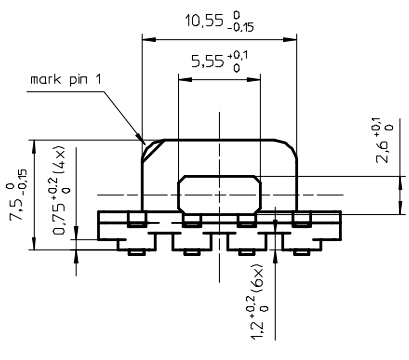

PROPOSED PAD ARRANGEMENT:

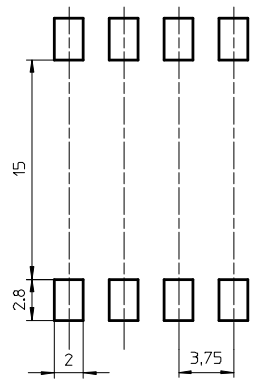

Coil former material: Sumikon PM-9630 (PF), glass-reinforced
UL file number E41429 - UL94V-0.

Pin material: CuSn, Sn plated.

Max. operating temp: acc. to IEC 60 085 class H, 180°C

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3.5 s.

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.

Min. winding area: 15,1 mm²

Mean length of turn: 24,1 mm.



CLASSNO.		03-02-20	
CSHS-EFD15-1S-8P-ZA		4322 021 06081	
NAME	J. T. ION	SUPERV.	001
MPA	CHIEF	DATE	03-02-20
PROPERTY of		112 - 001	069
Egbertus van		© FERROXCUBE 2000	
			A3