

Product Brief

# TC358743 Camera Serial Interface Converter Chipset (HDMI to MIPI®)

**Highlights**

- HDMI video and audio streams into MIPI® CSI-2 data to enable Application Processors with MIPI CSI-2 interface to process HDMI as input stream.
- Solutions are based on the latest versions of industry standards for HDMI 1.4 and MIPI CSI-2 1.01 interfaces.
- Support for common 3D formats and compatible protocols with the HDMI 1.4 standard
- Support for 1080P resolution at refresh rates of 60 fps.
- Applicable to products such as smart TVs, set-top boxes, and DVRs (digital video recorders).

**Description**

The Toshiba High Definition Multimedia Interface (HDMI) to Mobile Industry Processor Interface (MIPI®) Camera Serial Interface Type 2 (CSI-2) converter chipset, designated TC358743XBG, enables a Host processor with a MIPI CSI-2 interface to accept HDMI video and audio streams and process them as incoming data source. Application Processors can generate different types of video data for internal displays, external displays, as well as analog TV and HDMI TV; but some Application Processors have limitations in handling video data as an input source. A common input interface for video streams is MIPI CSI-2, which is a high-speed serial interface to an embedded camera. The Toshiba bridge, TC358743XBG, enables HDMI video stream to be processed by the Application Processor as a CSI-2 video stream. Audio is supported and can be transmitted over CSI-2 stream or over I<sup>2</sup>S. The maximum resolution supported is 1080P at a refresh rate of 60 fps. The bridge supports common 3D video formats and

protocols compatible with the HDMI 1.4 standard. The TC358743XBG supports a MIPI CSI-2 interface to the Host with configurable 1, 2, 3, or 4 data lanes with lane speeds of up to 1 Gbps per lane.


The Toshiba TC358743XBG is a 64-pin device and is optimized for the portable market. It has a small package size of 6 mm x 6 mm, 0.65 mm ball pitch. It is designed with clock and power management circuitry to support low-power states.

**Features**

**HDMI-RX Interface**

- HDMI 1.4
  - Video Formats Support (Up to 1080P)
    - RGB, YUV444: 24-bpp @60 fps
    - YUV422 24-bpp @60 fps
  - Audio Supports
    - Internal Audio PLL to track N/CTS value transmitted by the ACR packet
  - 3D support
  - Support for HDCP (High-bandwidth Digital Content Protection)
  - Support for DDC (Display Data Channel)

**TC358743XBG Block Diagram: HDMI to CSI-2 Bridge Chip**

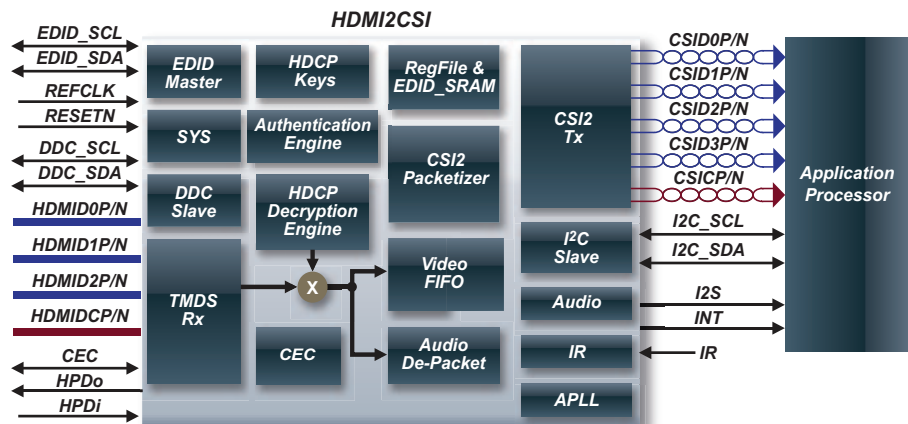

## Regional Sales Offices

### NORTHWEST

San Jose, CA  
TEL: (408) 526-2400  
FAX: (408) 526-2410

### SOUTHWEST

Irvine, CA  
TEL: (949) 623-2900  
FAX: (949) 474-1330  
El Paso, TX  
TEL: 915-771-8156  
FAX: 915-771-8178

### MIDWEST

Wixom, MI  
TEL: (248) 347-2607  
FAX: (248) 347-2602  
Buffalo Grove, IL  
TEL: (847) 484-2400  
FAX: (847) 541-7287

### NORTHEAST

Marlboro, MA  
TEL: (508) 481-0034  
FAX: (508) 481-8828  
Parsippany, NJ  
TEL: (973) 541-4715  
FAX: (973) 541-4716

### SOUTHEAST

Duluth, GA  
TEL: (770) 931-3363  
FAX: (770) 931-7602

- Support for EDID (Extended Display Identification Data)
  - Release A, Revision 1 (Feb 9, 2000)
  - First 128 byte (EDID 1.3 structure)
  - First E-EDID Extension: 128 bytes of CEA Extension version 3 (specified in CEA-861-D)
  - Embedded 1K-byte SRAM (EDID\_SRAM)
- Maximum HDMI clock speed: 165 MHz

- Does not support Audio Return Path and HDMI Ethernet Channels

### CSI-2 TX Interface

- MIPI CSI-2 compliant (Version 1.01 Revision 0.04 – 2 April 2009)
  - Supports up to 4 data lanes
- Supports up to 1 Gbps per data lane
  - Video, Audio and InfoFrame data can be transmitted

### I<sup>2</sup>C Slave Interface

- Support for normal mode (100 KHz), fast mode (400 KHz), and ultra fast mode (2 MHz)
- Configure all H2C internal registers

### Audio Output Interface

Either I<sup>2</sup>S or TDM Audio interface available (pins are multiplexed)

### I<sup>2</sup>S Audio Interface

- Single stereo channel

- Support Master Clock mode only
- Support 16, 18, 20 or 24-bit data (based on HDMI input stream)
- Support for left-justify or right-justify with MSB first

### TDM (Time Division Multiplexed) Audio Interface

- Single data link
- Support Master Clock mode only
- Up to 2,4,6 or 8 channels (based on HDMI input stream)
- Support 16, 18, 20 or 24-bit PCM audio data word (based on HDMI input stream)

### InfraRed (IR)

- Support NEC InfraRed protocol

### Power Supply Inputs

- Core and MIPI D-PHY: 1.2V
- I/O: 1.8V – 3.3V
- HDMI: 3.3V
- APLL: 3.3V/2.5V

### Package

- TC358743XBG: 64-pin, 6.0 x 6.0 mm, 0.65 mm ball pitch, 1.2 mm height

• The information contained herein is subject to change without notice.

• The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.

• TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situation in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.

• The Toshiba products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These Toshiba products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc. Unintended usage of Toshiba products listed in this document shall be made at the customer's own risk.

• The products described in this document may include products subject to foreign exchange and foreign trade laws.

• The products contained herein may also be controlled under the U.S. Export Administration Regulations and/or subject to the approval of the U.S. Department of Commerce or U.S. Department of State prior to export. Any export or re-export, directly or indirectly in contravention of any of the applicable export laws and regulations, is hereby prohibited.

MIPI is a licensed trademark of MIPI Alliance, Inc. in the U.S. and other jurisdictions

[www.Toshiba.com/taec](http://www.Toshiba.com/taec)

**TOSHIBA**  
Leading Innovation >>>

TC358743 Camera Serial Interface Converter Chipset (HDMI to MIPI®)