

TC9312N

T-77-21

LOGIC CONTROLLER LSI FOR AUDIO SYSTEM.

The TC9312N is logic controller LSI for tape recorder or other audio system applications.


- Programmable ROM Array construction. (PRA)
- Having 10 input, 10 output and 4 input/output ports.
- Capable of direct driving LED displays or other external components with built-in bipolar output drivers.
- Wide voltage range and low current consumption by CMOS construction.
- Built-in low voltage detection circuit to prevent a trouble at power ON/OFF.
- As Key Matrix ROM and Output Data ROM are programmed separately, software can be developed smoothly.
- Evaluator board is prepared as a tool for development.

MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	VDD	-0.3~7.0	V
Supply Current	IDD	200	mA
Input Voltage	VIN	-0.3~VDD+0.3	V
Output Current	IOH	30	mA
Power Dissipation	PC	750	mW
Operating Temperature	Topr	-30~75	°C
Storage Temperature	Tstg	-55~125	°C


Note : This IC is developed especially for audio applications. ROM data is not changeable after shipping

Unit in mm

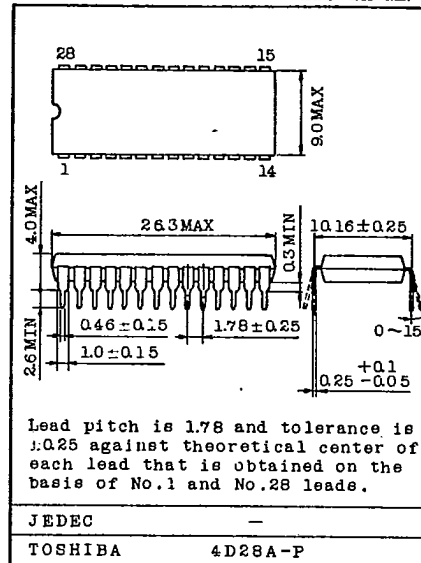

Weight: 1.5g

PIN CONNECTIONS

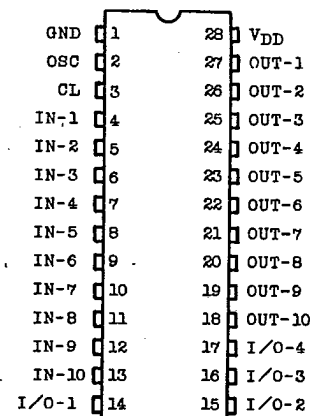


AUDIO DIGITAL IC

TC9312N

T-77-21

BLOCK DIAGRAM

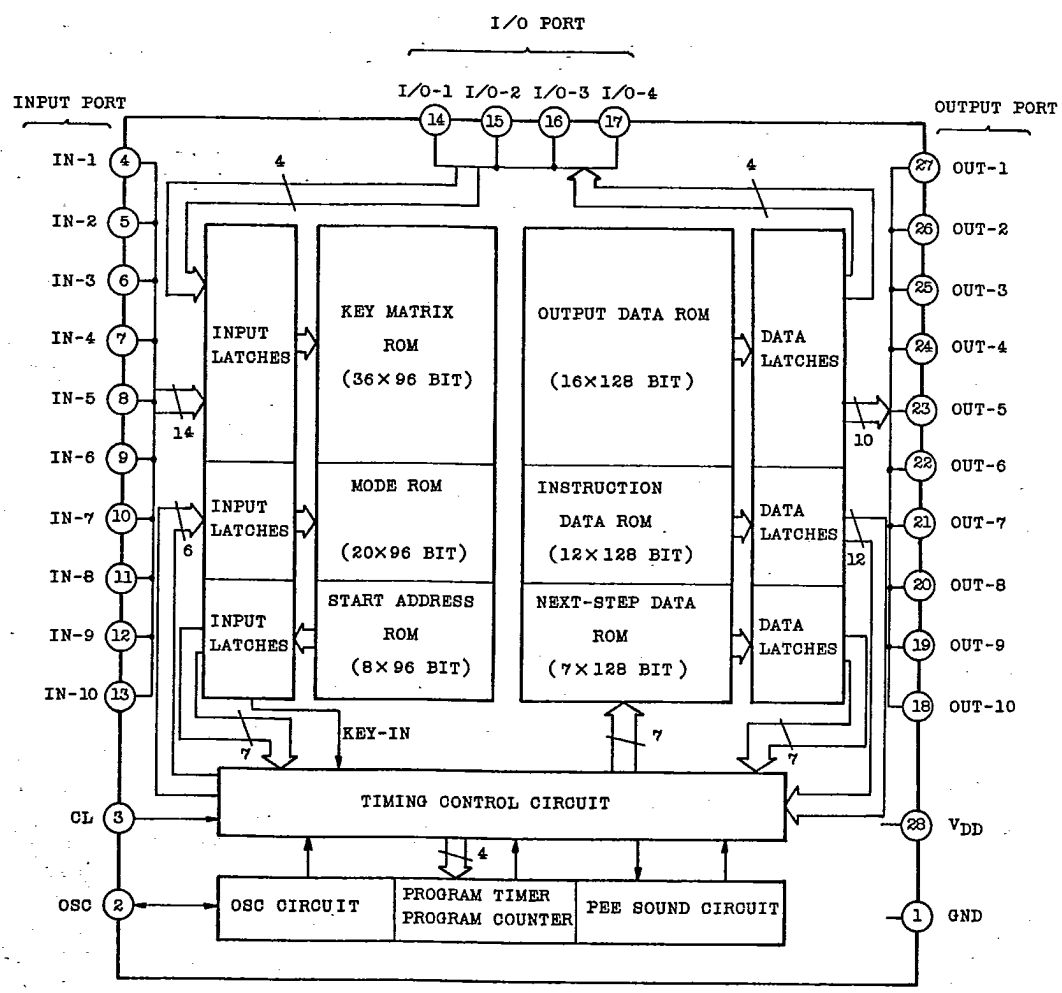

TOSHIBA

TC9312N


T-77-21

ELECTRICAL CHARACTERISTICS (Unless otherwise specified, $T_a=25^\circ\text{C}$, $V_{DD}=5.0\text{V}$)


CHARACTERISTIC		SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Supply Voltage		V_{DD}	-		4.0	5.0	6.0	V
Operating Supply Current		I_{DD}	-	$f_{OSC}=6.4\text{kHz}$ No Load	-	0.2	1.0	mA
Supply Current at Inhibit		I_{DS}	-	No Load, OSC stop (Note 1)	-	100	200	μA
Input Voltage	"H" Level	V_{IH}	-	All input ports except 3 level input ports	$V_{DD} \times 0.7$	-	V_{DD}	V
	"L" Level	V_{IL}	-		0	-	$V_{DD} \times 0.3$	
3 Level Input Voltage	"H" Level	V_{IH}	-	IN-8,9 ports with 3 level input	$V_{DD} - 0.5$	-	V_{DD}	V
	Open	V_{IM}	-		-	2.5	-	
	"L" Level	V_{IL}	-		0	-	0.5	
Input Current	"H" Level	I_{IH}	-	In case of fixed C-MOS compatible input by mask option.	$V_{IH}=5\text{V}$	-	-	μA
	"L" Level	I_{IL}	-		$V_{IL}=0\text{V}$	-	-	
Input Resistance	Pull-up	R_{UP}	-	In case of fixed pull-up or pull-down by mask option.	-	100	-	k Ω
	Pull-Down	R_{DOWN}	-		-	100	-	
Output Current	"H" Level	I_{OH}	1	All output ports	$V_{OH}=4.0\text{V}$	15	20	mA
	"L" Level	I_{OL}	2	All output ports except OUT-9,10	$V_{OL}=1.0\text{V}$	-	0.2	
				OUT-9,10 ports		0.5	1.0	
Operating Frequency		f_{opr}	-		0.64	6.4	64	kHz
OSC Frequency		f_{OSC}	-	$R_x=33\text{k}\Omega$, $C_x=8200\text{pF}$	-	6.4	-	kHz
Auto Clear Voltage		V_{CL}	-	In case of Auto-Clear function by mask option	-	3.5	3.8	V

Note 1. The value of I_{DS} is guaranteed in case of no fixed Auto-Clear function and no fixed 3 level input by mask option.

TEST CIRCUIT 1. (I_{OH})

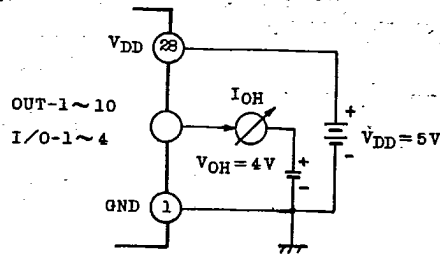

TEST CIRCUIT 2. (I_{OL})

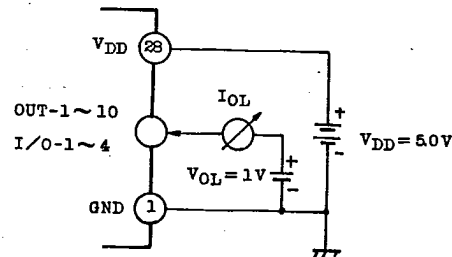


AUDIO DIGITAL IC

TC9312N

T-77-21

FLOW CHART OPERATION

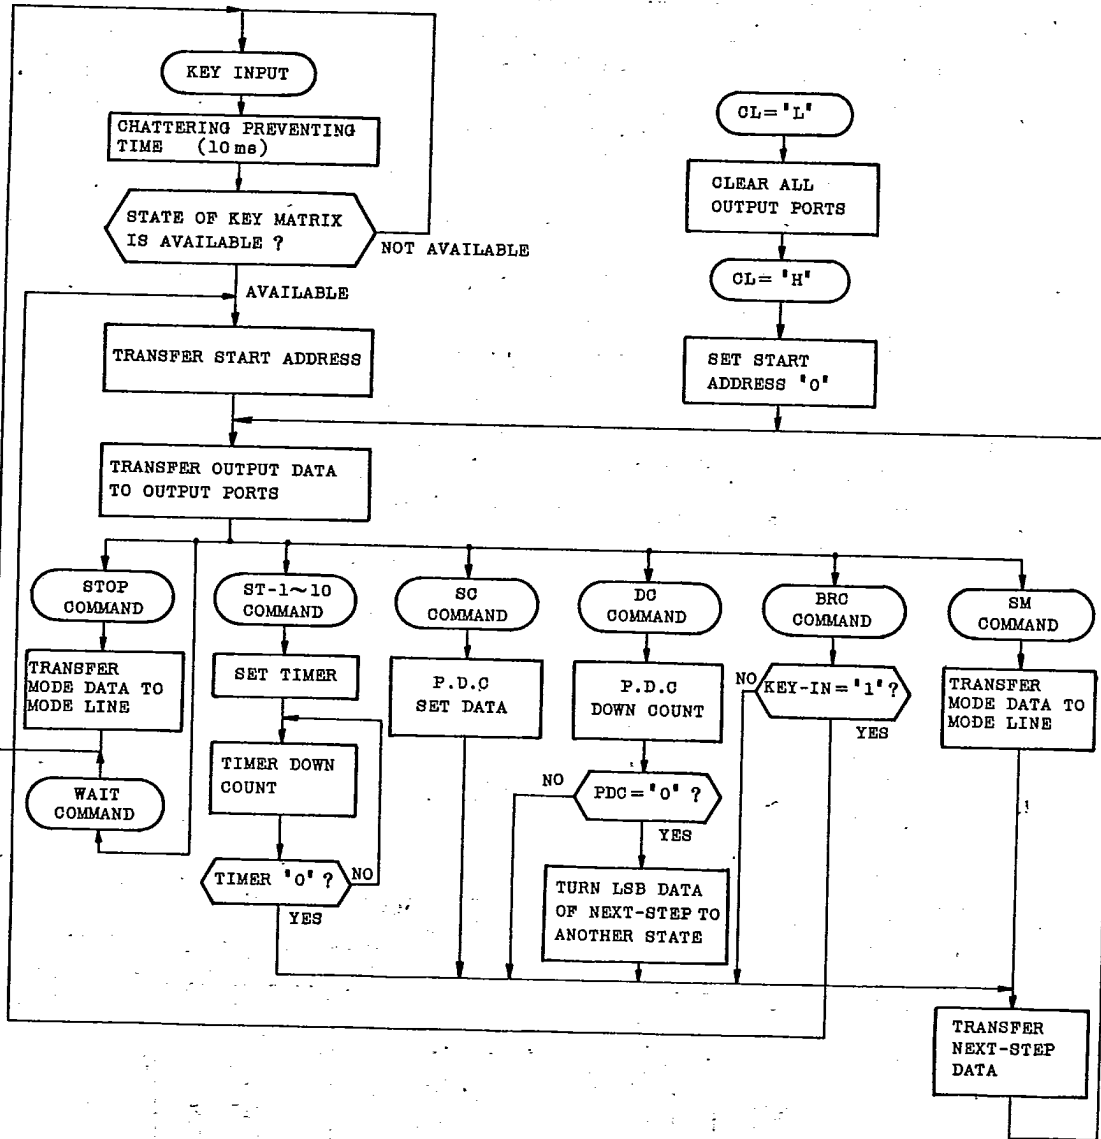


TOSHIBA

TC9312N


T-77-21

OSCILLATION FREQUENCY (f_{OSC}) CHARACTERISTICS

(1) $f_{OSC} - V_{DD}$ ($f_{OSC} = 6.4\text{kHz}$)

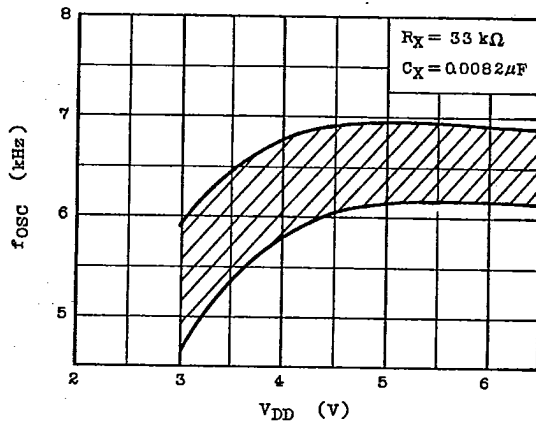

(2) $R_X - C_X$ ($f_{OSC} \approx 2.15/R_X \cdot C_X = 6.4\text{kHz}$)

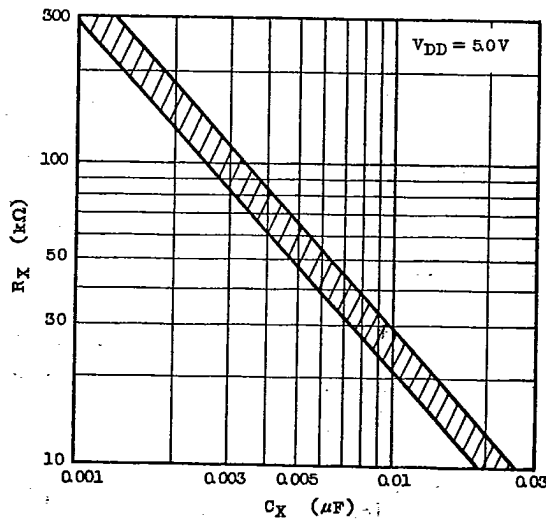

AUDIO DIGITAL IC