

Stealth Microwave's **SM6471-37HS** is an affordable solid state GaAs amplifier designed for the wireless market. With **600 MHz of instantaneous bandwidth**, the amplifier can be used in various analog and digital video applications. The unit uses the latest surface mount technologies to provide numerous features, while maintaining a very small size.

Features

- Mis-Match Protected
- Over Voltage Protection
- Thermal Protection with Auto Reset

Options

- TTL Logic On/Off Control
- Heatsink
- +10V Supply

Configurations

- Module
- Laboratory Unit
- 19" Rack




Parameter	Specification
Frequency Range	6.4 – 7.1 GHz
Pout (P1dB)	+ 37 dBm
Third Order Intercept Point	+ 47 dBm (typ.)
Linear Gain	38 dB ± 1.0 dB
Gain Flatness over Full Band	± .5 dB
Input/Output Return Loss	-16 dB / -16 dB
DC Input Voltage	+12 Volts
DC Input Current	2.0 Amperes
Mechanical Dimensions	4.7 x 2.0 x .54 inches
RF Connectors	SMA Female
Operating Temperature	0°C to +55°C
Operating Humidity	95% Non-condensing
Operating Altitude	Up to 10,000 feet above Sea Level

DIMENSIONS IN INCHES


1007 Whitehead Road Ext., Trenton, NJ 08638

Tel: (609) 538-8586 ♦ Fax: (609) 538-8587

Email: sales@stealthmicrowave.com ♦ Web site: www.stealthmicrowave.com

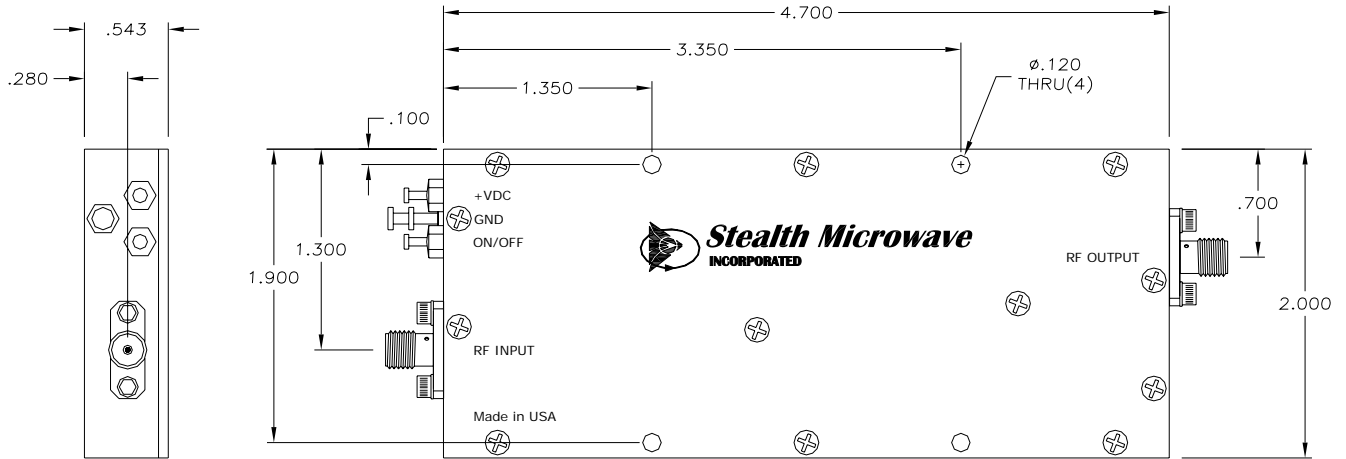

HEATSINK OPTION

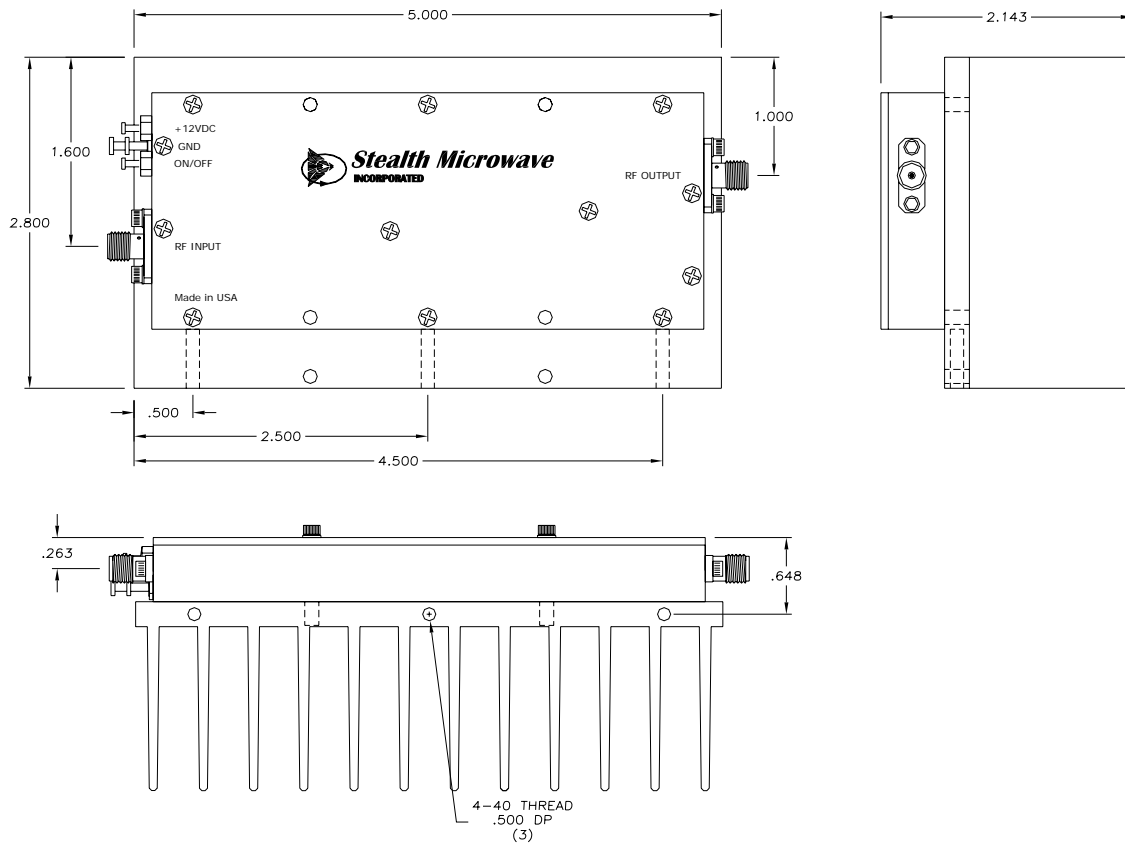

Pin	Description	Values
RF IN	Input Connector (SMA Female)	-1 dBm typ.
RF OUT	Output Connector (SMA Female)	+ 37 dBm @ P1dB
GND	Ground Turret	---
+12 VDC	DC Input Voltage	+ 12 Volts @ 2.0 Amperes
ON/OFF	TTL Logic On/Off	+5 Volts = On, 0 Volts = Off

Specifications subject to change without notice.