




- FEATURES**
- Low cost
  - Diffused junction
  - Low leakage
  - Low forward voltage drop
  - High current capability
  - Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
  - The plastic material carries U/L recognition 94V-0

**MECHANICAL DATA**

Case: JEDEC DO-15, molded plastic  
 Terminals: Axial lead, solderable per MIL-STD-202, Method 208  
 Polarity: Color band denotes cathode  
 Weight: 0.014 ounces, 0.39 grams  
 Mounting position: Any

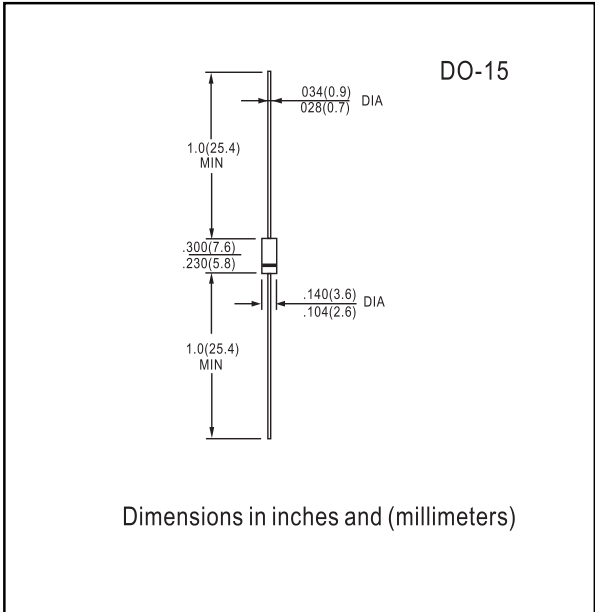

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		ERC01 -02	ERC01 -04	ERC01 -06	ERC01 -10	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	200	400	600	1000	V
Maximum RMS voltage	$V_{RMS}$	140	280	420	700	V
Maximum DC blocking voltage	$V_{DC}$	200	400	600	1000	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ C$	$I_{F(AV)}$	1.5				A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ C$	$I_{FSM}$	130.0				A
Maximum instantaneous forward voltage @ 1.5 A	$V_F$	1.0				V
Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=100^\circ C$	$I_R$	5.0 50.0				$\mu A$
Typical junction capacitance (Note1)	$C_J$	20				pF
Typical thermal resistance (Note2)	$R_{\theta JA}$	40				$^\circ C/W$
Operating junction temperature range	$T_J$	- 55 ---- + 150				$^\circ C$
Storage temperature range	$T_{STG}$	- 55 ---- + 150				$^\circ C$


NOTE: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Thermal resistance from junction to ambient.




**RATINGS AND CHARACTERISTIC CURVES ERC01-02 THRU ERC01-10**


**FIG.1 – FORWARD CHARACTERISTIC**

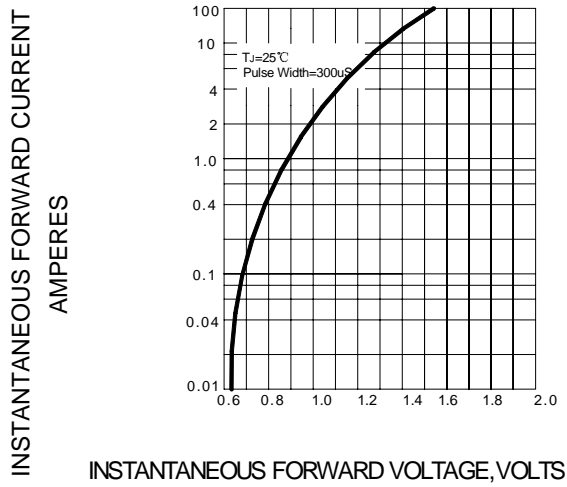

**FIG.2 – JUNCTION CHARACTERISTICS**

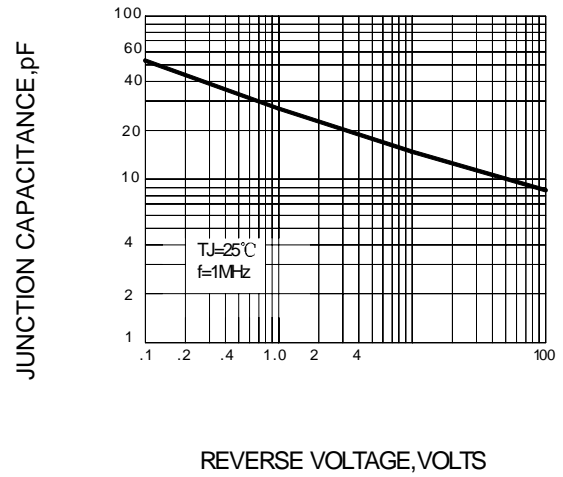

**FIG.3 –CURRENT DERATING CURVE**

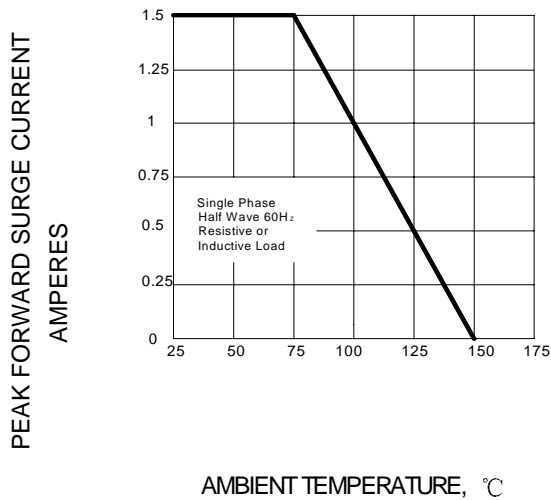

**FIG.4 –PEAK FORWARD SURGE CURRENT**

