



# UF5400G THRU UF5408G

## ULTRAFAST RECTIFIER

VOLTAGE: 50-1000V

CURRENT: 3.0A


### FEATURES

- Low power loss, high efficiency
- Low leakage
- Low forward voltage
- High current capability
- High speed switching
- High surge capability
- High reliability

### MECHANICAL DATA

- **Case:** Molded plastic
- **Epoxy:** UL94V-0 rate flame retardant
- **Lead:** MIL-STD- 202E, Method 208 guaranteed
- **Polarity:** Color band denotes cathode end
- **Mounting position:** Any
- **Weight:** 1.20 grams

### DO-27

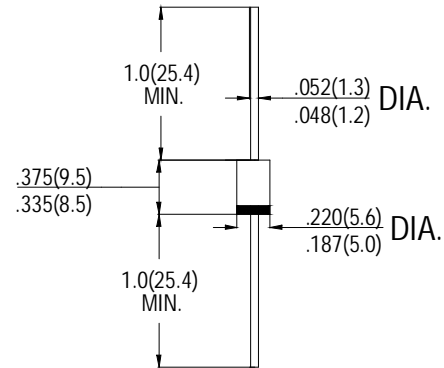

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	SYMBOL	UF540 0G	UF54 01G	UF54 02G	UF54 04G	UF54 06G	UF54 07G	UF54 08G	units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward rectified Current at $T_A=50^\circ\text{C}$	$I_o$	3.0							A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rate load (JEDEC method)	$I_{FSM}$	150							A
Maximum Instantaneous forward Voltage at 3.0A DC	$V_F$	1.0			1.7				V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_A=25^\circ\text{C}$	$I_R$	10.0							$\mu\text{A}$
Maximum Full Load Reverse Current Full Cycle Average, .375" (9.5mm) lead length at $T_L=75^\circ\text{C}$		150							
Maximum Reverse Recovery Time (Note 1)	$t_{rr}$	50			75				nS
Typical Junction Capacitance (Note 2)	$C_J$	70			50				pF

Notes: 1. Test Conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{RR}=0.25\text{A}$

2. Measured at 1MHz and applied reverse voltage of 4.0 volts