

## 塑封快恢复整流二极管


反向电压 200 -- 800V

正向电流 0.5 A

## Plastic fast Recover Rectifier

Reverse Voltage 200 to 800V

Forward Current 0.5A

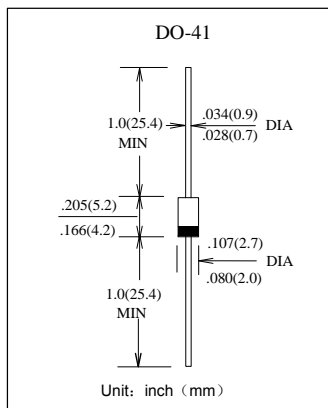

## 特征 Features

- 反向漏电流低 Low reverse leakage
- 正向浪涌承受能力较强 High forward surge capability
- 高温焊接保证 High temperature soldering guaranteed:  
260°C/10 秒, 0.375" (9.5mm) 引线长度。  
260°C/10 seconds, 0.375" (9.5mm) lead length.
- 引线可承受5 磅 (2.3kg) 拉力。 5 lbs. (2.3kg) tension
- 引线 and 管体皆符合RoHS标准。  
Lead and body according with RoHS standard

## 机械数据 Mechanical Data

- 端子: 镀锡轴向引线 Terminals: Plated axial leads
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性 TA = 25°C 除非另有规定。

Maximum Ratings &amp; Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	ERB4302	ERB4304	ERB4306	ERB4308	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	200	400	600	800	V
最大均方根电压 Maximum RMS voltage	V <sub>RMS</sub>	140	280	420	560	V
最大直流阻断电压 Maximum DC blocking voltage	V <sub>DC</sub>	200	400	600	800	V
最大正向平均整流电流 Maximum average forward rectified current	I <sub>F(AV)</sub>	0.5				A
峰值正向浪涌电流 8.3ms单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I <sub>FSM</sub>	10				A
典型热阻 Typical thermal resistance	R <sub>θJA</sub>	65				°C/W
工作结温和存储温度 Operating junction and storage temperature range	T <sub>j</sub> , T <sub>STG</sub>	-55 --- +150				°C

电特性 TA = 25°C 除非另有规定。

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	ERB4302	ERB4304	ERB4306	ERB4308	单位 Unit
最大正向电压 Maximum forward voltage	I <sub>F</sub> = 0.5A	1.2				V
最大反向电流 Maximum reverse current	TA= 25°C TA=100°C		10 100			μA
最大反向恢复时间 MAX. Reverse Recovery Time	I <sub>F</sub> =0.5A I <sub>R</sub> =1.0A I <sub>RR</sub> =0.25A		100			nS
典型结电容 Type junction capacitance	V <sub>R</sub> = 4.0V, f = 1MHz		12			pF

特性曲线 Characteristic Curves

