



ABT1012 Video Scaling Chip

High Performance Video Scaling Chip

The ABT1012 is a high performance video scaling chip targeted at A/V Receiver, Blu-ray® and Set-top-box applications. The ABT1012 features Precision Video Scaling™ that independently scales SD or HD images horizontally and vertically to achieve outstanding picture quality for resolutions up to 1080p. ABT1012 is pin-compatible, but not register compatible with the ABT1010 chip.

Applications

- ◆ A/V Receivers
- ◆ Blu-ray Players/Recorders
- ◆ Docking Stations/Adapters
- ◆ Set-top Boxes

Key Features

- ◆ 10-bit fully programmable horizontal and vertical scaler
- ◆ Up-scales to 1080p and downscales as low as 480i/576i format
- ◆ AutoCUE-C™ Automatic Chroma Up-sampling Error detection and correction
- ◆ Panoramic stretch and Pillarbox mode to support 4:3 content on a 16:9 display

Input

- ◆ 16/20-bit YCbCr 4:2:2
- ◆ 8/10/12-bit YCbCr 4:2:2 (ITU-R BT.656)
- ◆ Supports a wide range of video formats up to and including 1080p
- ◆ Separate and embedded syncs, DE generation, BT.656 support
- ◆ 165MHz maximum input clock
- ◆ Other resolutions are supported but may require an external PLL

Picture Controls

- ◆ Brightness
- ◆ Contrast
- ◆ Saturation
- ◆ Sharpness (vertical and horizontal)
- ◆ Sub-pixel Y/C delay
- ◆ Output Black level
- ◆ Dynamic Range Expansion and Compression
- ◆ 12-bit 3x3 Matrix for color correction
- ◆ xvYCC enhanced colorimetry

Pass Through Mode

- ◆ All formats including 1080p and 3D

Output

- ◆ 24-bit RGB/YCbCr 4:4:4
- ◆ 16/20-bit YCbCr 4:2:2
- ◆ 8/10-bit YCbCr 4:2:2 (ITU-R BT.656)
- ◆ Supports a wide range of video formats up to and including 1080p
- ◆ Other resolutions are supported but may require an external PLL
- ◆ 165MHz maximum output clock

Test Pattern Generator

- ◆ Flexible test pattern generator under software control to provide reference test patterns for display calibration

Host Interface

- ◆ Two wire serial bus interface (I²C compatible)

Package

- ◆ 100-pin LQFP


Voltage

- ◆ 1.8V core and 3.3V I/O

Power

- ◆ <2 W

ABT1012 Typical Application

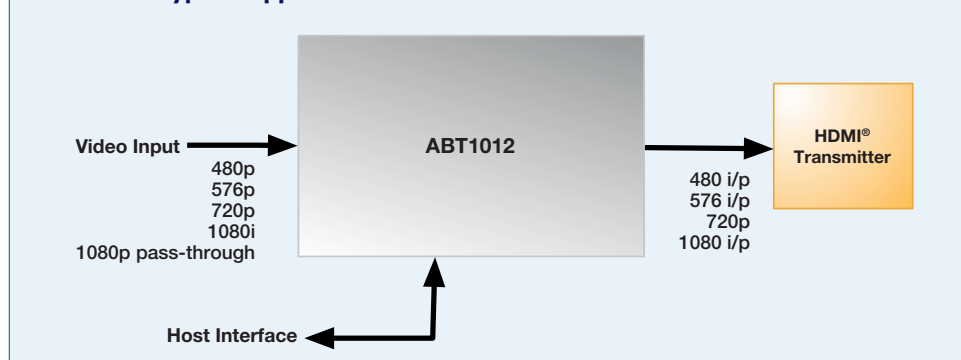

Enhancing the connected HD experience

1060 E. Arques Ave., Sunnyvale, CA 94085 T 408.616.4000 F 408.830.9530 www.siliconimage.com

© 2011 Silicon Image, Inc. All rights reserved. Silicon Image, the Silicon Image logo, Precision Video Scaling, are trademarks or registered trademarks of Silicon Image, Inc. in the United States and/or other countries. HDMI, the HDMI logo, and High-Definition Multimedia Interface, are trademarks or registered trademarks in the United States and/or other countries and are used under license from HDMI Licensing, LLC. MHL, the MHL logo, Mobile High-Definition Link, are trademarks or registered trademarks in the United States and/or other countries and are used under license from MHL, LLC. All other trademarks are the property of their respective owner in the United States and/or other countries. Product specifications are subject to change without notice. Printed in USA 04/11 Sil PB-1086