


200mW SOD-323 SURFACE MOUNT

Small Outline Flat Lead Plastic Package

Zener Voltage Regulators

Green Product



SOD-323 Flat Lead


Absolute Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Value	Units
P_D	Power Dissipation	200	mW
T_{STG}	Storage Temperature Range	-65 to +150	$^\circ\text{C}$
T_{OPR}	Operating Temperature Range	-65 to +150	$^\circ\text{C}$

These ratings are limiting values above which the serviceability of the diode may be impaired.

Specification Features:

- Wide Zener Voltage Range Selection, 2.4V to 75V
- VZ Tolerance Selection of $\pm 5\%$ (C Series)
- Flat Lead SOD-323 Small Outline Plastic Package
- Surface Device Type Mounting
- RoHS Compliant
- Green EMC
- Matte Tin(Sn) Lead Finish
- Band Indicates Cathode

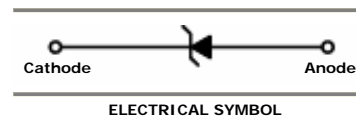

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Device Type	Device Marking	$V_Z @ I_{ZT}$ (Volts)			I_{ZT} (mA)	$Z_{ZT} @ I_{ZT}$ (Ω) Max	I_{ZK} (mA)	$Z_{ZK} @ I_{ZK}$ (Ω) Max	$I_R @ V_R$ (μA) Max	V_R (Volts)
		Min	Nom	Max						
MM3Z2V4CW	Z0	2.28	2.4	2.52	5	100	1	564	45	1
MM3Z2V7CW	Z1	2.57	2.7	2.84	5	100	1	564	18	1
MM3Z3V0CW	Z2	2.85	3.0	3.15	5	100	1	564	9	1
MM3Z3V3CW	Z3	3.14	3.3	3.47	5	95	1	564	4.5	1
MM3Z3V6CW	Z4	3.42	3.6	3.78	5	90	1	564	4.5	1
MM3Z3V9CW	Z5	3.71	3.9	4.10	5	90	1	564	2.7	1
MM3Z4V3CW	Z6	4.09	4.3	4.52	5	90	1	564	2.7	1
MM3Z4V7CW	Z7	4.47	4.7	4.94	5	80	1	470	2.7	2
MM3Z5V1CW	Z8	4.85	5.1	5.36	5	60	1	451	1.8	2
MM3Z5V6CW	Z9	5.32	5.6	5.88	5	40	1	376	0.9	2
MM3Z6V2CW	ZA	5.89	6.2	6.51	5	10	1	141	2.7	4
MM3Z6V8CW	ZB	6.46	6.8	7.14	5	15	1	75	1.8	4
MM3Z7V5CW	ZC	7.11	7.5	7.86	5	15	1	75	0.9	5
MM3Z8V2CW	ZD	7.79	8.2	8.61	5	15	1	75	0.63	5
MM3Z9V1CW	ZE	8.65	9.1	9.56	5	15	1	94	0.45	6
MM3Z10VCW	ZF	9.50	10	10.50	5	20	1	141	0.18	7
MM3Z11VCW	ZG	10.45	11	11.55	5	20	1	141	0.09	8
MM3Z12VCW	ZH	11.40	12	12.60	5	25	1	141	0.09	8
MM3Z13VCW	ZJ	12.35	13	13.65	5	30	1	160	0.09	8
MM3Z15VCW	ZK	14.25	15	15.75	5	30	1	188	0.045	10.5

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Device Type	Device Marking	$V_Z @ I_{ZT}$ (Volts)			I_{ZT} (mA)	$Z_{ZT} @ I_{ZT}$ (Ω) Max	I_{ZK} (mA)	$Z_{ZK} @ I_{ZK}$ (Ω) Max	$I_R @ V_R$ (μA) Max	V_R (Volts)
		Min	Nom	Max						
MM3Z16VCW	ZL	15.20	16	16.80	5	40	1	188	0.045	11.2
MM3Z18VCW	ZM	17.10	18	18.90	5	45	1	212	0.045	12.6
MM3Z20VCW	ZN	19.00	20	21.00	5	55	1	212	0.045	14.0
MM3Z22VCW	ZP	20.90	22	23.10	5	55	1	235	0.045	15.4
MM3Z24VCW	ZR	22.80	24	25.20	5	70	1	235	0.045	16.8
MM3Z27VCW	ZS	25.65	27	28.35	5	80	0.5	282	0.045	18.9
MM3Z30VCW	ZT	28.50	30	31.50	5	80	0.5	282	0.045	21.0
MM3Z33VCW	ZU	31.35	33	34.65	5	80	0.5	306	0.045	23.0
MM3Z36VCW	ZV	34.20	36	37.80	5	90	0.5	329	0.045	25.2
MM3Z39VCW	ZW	37.05	39	40.95	5	130	0.5	329	0.045	27.3
MM3Z43VCW	ZX	40.85	43	45.15	5	150	0.5	353	0.045	30.1
MM3Z47VCW	ZY	44.65	47	49.35	5	170	0.5	353	0.045	33.0
MM3Z51VCW	Z-	48.45	51	53.55	5	180	0.5	376	0.045	35.7
MM3Z56VCW	Z=	53.20	56	58.80	5	200	0.5	400	0.045	39.2
MM3Z62VCW	Z≡	58.90	62	65.10	5	215	0.5	423	0.045	43.4
MM3Z68VCW	Z>	64.60	68	71.40	5	240	0.5	447	0.045	47.6
MM3Z75VCW	Z<	71.25	75	78.75	5	255	0.5	470	0.045	52.5

 V_F Forward Voltage = 1 V Maximum @ $I_F = 10$ mA for all types

Notes:

1. The Zener Voltage (V_Z) is tested under pulse condition of 10mS.
2. The device numbers listed have a standard tolerance on the nominal zener voltage of $\pm 5\%$.
3. For detailed information on price, availability and delivery of nominal zener voltages between the voltages shown and tighter voltage tolerances, contact your nearest Tak Cheong Electronics representative.
4. The zener impedance is derived from the 60-cycle ac voltage, which results when an ac current having an rms value equal to 10% of the dc zener current (I_{ZT} or I_{ZK}) is superimposed to I_{ZT} or I_{ZK} .

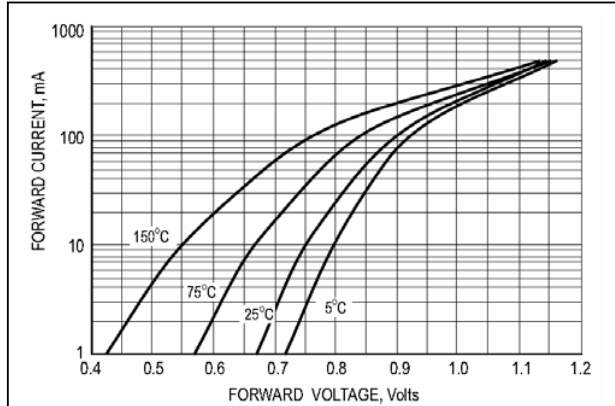
RATING AND CHARACTERISTIC CURVES


Fig.1 TYPICAL FORWARD VOLTAGE

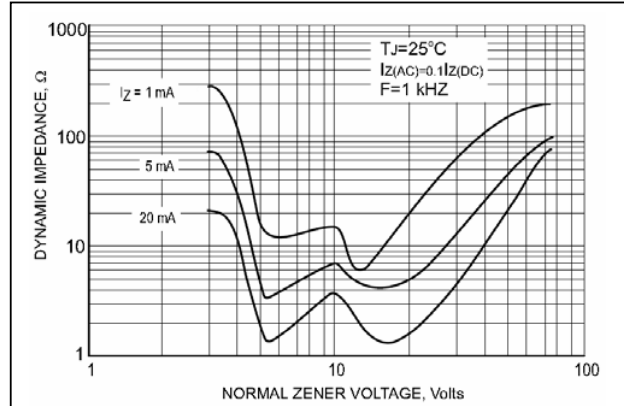


Fig.2 EFFECT OF ZENER VOLTAGE ON ZENER IMPEDANCE

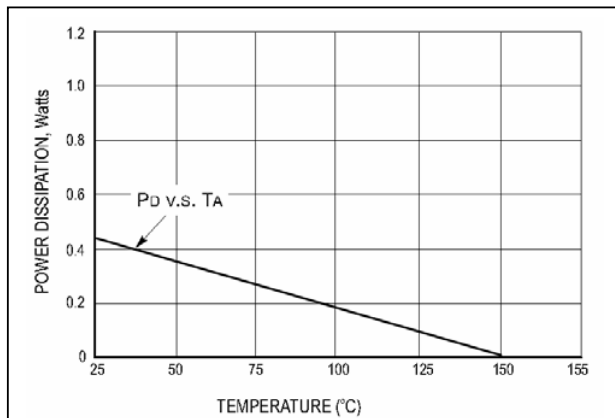


Fig.3 MAXIMUM NONREPETITIVE SURGE

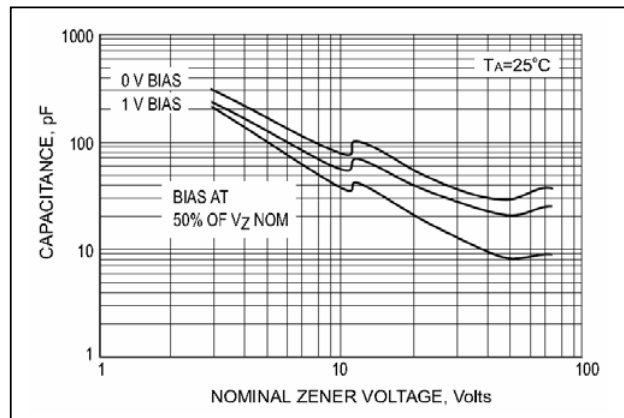


Fig.4 TYPICAL CAPACITANCE

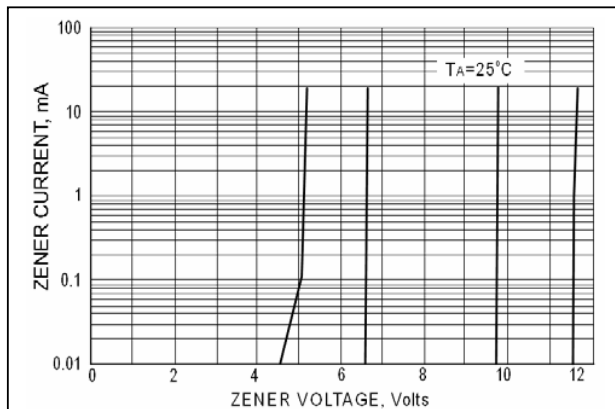


Fig.5 ZENER BREAKDOWN CHARACTERISTICS



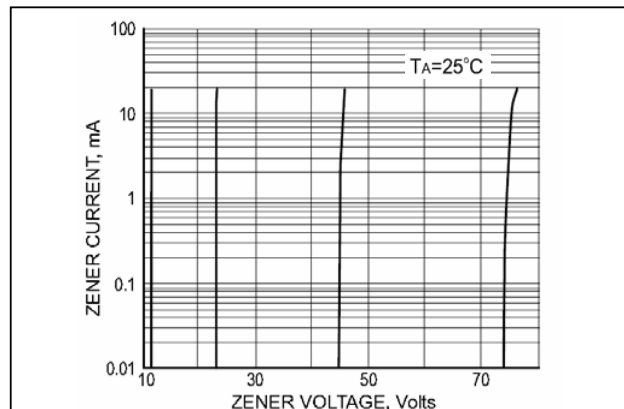


Fig.6 ZENER BREAKDOWN CHARACTERISTICS

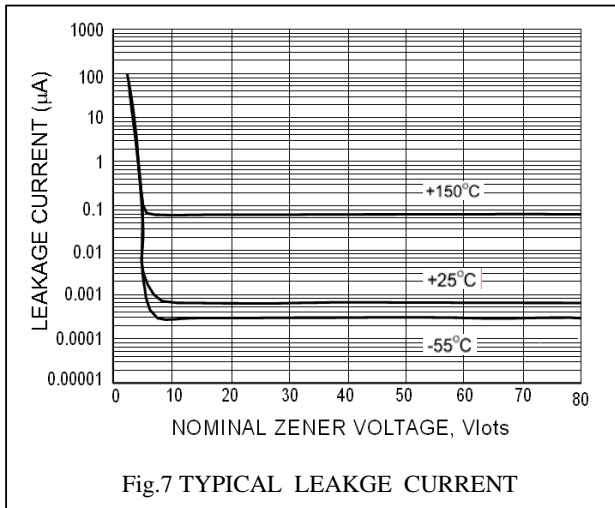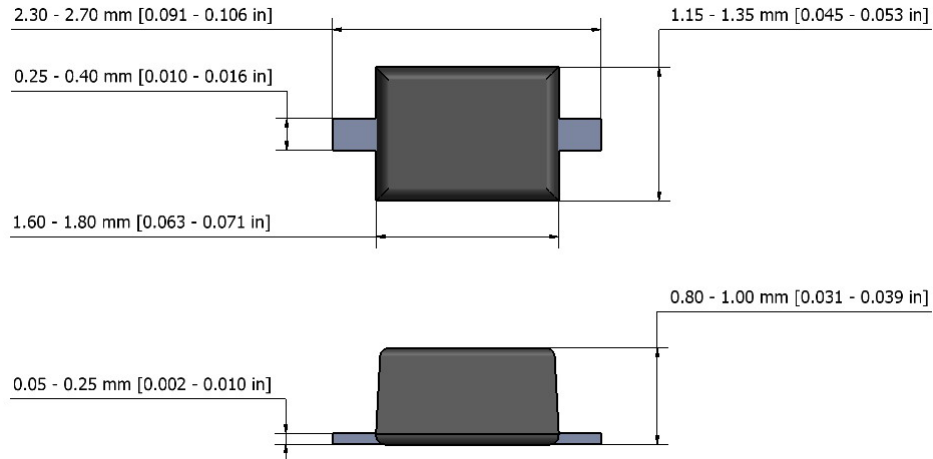


SOD-323 Package Outline

NOTE: The above package outline is similar to JEITA SC-90.

This datasheet presents technical data of Tak Cheong's Zener Diodes. Complete specifications for the individual devices are provided in the form of datasheets. A comprehensive Selector Guide is included to simplify the task of choosing the best set of components required for a specific application. For additional information, please visit our website <http://www.takcheong.com>.

Although information in this datasheet has been carefully checked, no responsibility for the inaccuracies can be assumed by Tak Cheong. Please consult your nearest Tak Cheong's sales office for further assistance.

Tak Cheong reserves the right to make changes without further notice to any products herein to further improve reliability, function or design, cost and productivity.

TAK CHEONG® and  are registered trademarks of Tak Cheong Electronics (Holdings) Co., Ltd.