



# BZT52-C2V4 SERIES

## SURFACE MOUNT SILICON ZENER DIODES

**VOLTAGE** 2.4 to 75 Volts **POWER** 500 mWatts

SOD-123


Unit: inch (mm)

### FEATURES

- Planar Die construction
- 500mW Power Dissipation
- Zener Voltages from 2.4~75V
- Ideally Suited for Automated Assembly Processes
- Pb free product : 99% Sn above can meet RoHS environment substance dieective request

### MECHANICAL DATA

- Case: SOD-123, Molded Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Polarity: See Diagram Below
- Approx. Weight: 0.01 grams
- Mounting Position: Any

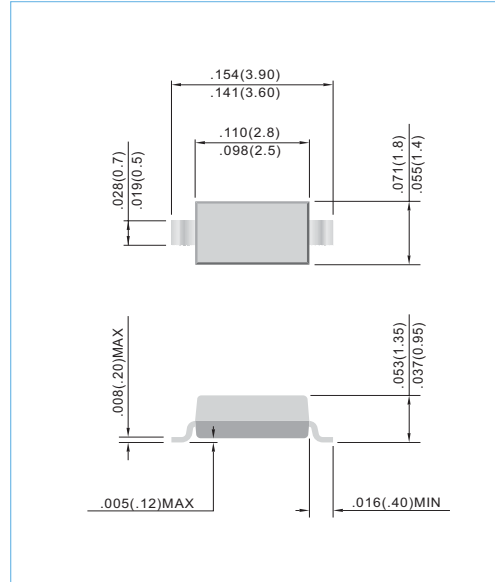

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Value	Units
Maximum Forward Voltage Drop at IF=100mA	V <sub>F</sub>	1.0	V
Maximum Power Dissipation (Notes A) at 25°C	P <sub>D</sub>	500	mW
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC method) (Notes B)	I <sub>FSM</sub>	4.0	Amps
Operating Junction and Storage Temperature Range	T <sub>J</sub>	-50 to +150	°C

#### NOTES:

- A. Mounted on 5.0mm<sup>2</sup>(.013mm thick) land areas.  
 B. Measured on 8.3ms, single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum.



## BZT52-C2V4 SERIES

Part Number	Nominal Zener Voltage			Max. Zener Impedance				Max Reverse Leakage Current		Marking Code	Package
	Vz @ IzT			Zzt @ IzT		Zzk @ Izk		IR @ VR			
	Nom. V	Min. V	Max. V	Ω	mA	Ω	mA	μA	V		
BZT52-C2V4	2.4	2.28	2.52	85	5.0	600	1.00	100	1.0	W1	SOD-123
BZT52-C2V7	2.7	2.57	2.84	83	5.0	600	1.00	75	1.0	W2	SOD-123
BZT52-C3	3.0	2.85	3.15	95	5.0	600	1.00	50	1.0	W3	SOD-123
BZT52-C3V3	3.3	3.14	3.47	95	5.0	600	1.00	25	1.0	W4	SOD-123
BZT52-C3V6	3.6	3.42	3.78	95	5.0	600	1.00	15	1.0	W5	SOD-123
BZT52-C3V9	3.9	3.71	4.10	95	5.0	600	1.00	10	1.0	W6	SOD-123
BZT52-C4V3	4.3	4.09	4.52	95	5.0	600	1.00	5.0	1.0	W7	SOD-123
BZT52-C4V7	4.7	4.47	4.94	78	5.0	500	1.00	5.0	2.0	W8	SOD-123
BZT52-C5V1	5.1	4.85	5.36	60	5.0	480	1.00	0.1	0.8	W9	SOD-123
BZT52-C5V6	5.6	5.32	5.88	40	5.0	400	1.00	0.1	1.0	WA	SOD-123
BZT52-C6V2	6.2	5.89	6.51	10	5.0	150	1.00	0.1	2.0	WB	SOD-123
BZT52-C6V8	6.8	6.46	7.14	8	5.0	80	1.00	0.1	3.0	WC	SOD-123
BZT52-C7V5	7.5	7.13	7.88	7	5.0	80	1.00	0.1	5.0	WD	SOD-123
BZT52-C8V2	8.2	7.79	8.61	7	5.0	80	1.00	0.1	6.0	WE	SOD-123
BZT52-C9V1	9.1	8.65	9.56	10	5.0	100	1.00	0.1	7.0	WF	SOD-123
BZT52-C10	10	9.50	10.50	15	5.0	150	1.00	0.1	7.5	WG	SOD-123
BZT52-C11	11	10.45	11.55	20	5.0	150	1.00	0.1	8.5	WH	SOD-123
BZT52-C12	12	11.40	12.60	20	5.0	150	1.00	0.1	9.0	WI	SOD-123
BZT52-C13	13	12.35	13.65	25	5.0	170	1.00	0.1	10.0	WK	SOD-123
BZT52-C14	14	13.30	14.70	25	5.0	170	1.00	0.1	10.5	WJ	SOD-123
BZT52-C15	15	14.25	15.75	30	5.0	200	1.00	0.1	11.0	WL	SOD-123
BZT52-C16	16	15.20	16.80	40	5.0	200	1.00	0.1	12.0	WM	SOD-123
BZT52-C17	17	16.15	17.85	40	5.0	200	1.00	0.1	13.0	17C	SOD-123
BZT52-C18	18	17.10	18.90	50	5.0	225	1.00	0.1	14.0	WN	SOD-123
BZT52-C20	20	19.00	21.00	50	5.0	225	1.00	0.1	15.0	WO	SOD-123
BZT52-C22	22	20.90	23.10	55	5.0	250	1.00	0.1	17.0	WP	SOD-123
BZT52-C24	24	22.80	25.20	80	5.0	250	1.00	0.1	18.0	WR	SOD-123
BZT52-C27	27	25.65	28.35	80	5.0	300	1.00	0.1	20.0	WS	SOD-123
BZT52-C28	28	26.60	29.40	80	5.0	300	1.00	0.1	22.0	28C	SOD-123
BZT52-C30	30	28.50	31.50	80	5.0	300	1.00	0.1	22.5	WT	SOD-123
BZT52-C33	33	31.35	34.65	80	5.0	325	1.00	0.1	25.0	WU	SOD-123
BZT52-C36	36	34.20	37.80	90	5.0	350	1.00	0.1	27.0	WW	SOD-123
BZT52-C39	39	37.05	40.95	90	5.0	350	1.00	0.1	29.0	WX	SOD-123
BZT52-C43	43	40.85	45.15	100	5.0	700	1.00	0.1	32.0	WY	SOD-123
BZT52-C47	47	44.65	49.35	100	5.0	750	1.00	0.1	35.0	WZ	SOD-123
BZT52-C51	51	48.45	53.55	100	5.0	750	1.00	0.1	38.0	XA	SOD-123
BZT52-C56	56	53.20	58.80	135	2.5	1000	1.00	0.1	42.0	X2	SOD-123
BZT52-C62	62	58.90	65.10	150	2.5	1000	1.00	0.1	46.0	X3	SOD-123
BZT52-C68	68	64.60	71.40	200	2.5	1000	1.00	0.1	51.0	X4	SOD-123
BZT52-C75	75	71.25	78.75	250	2.5	1000	1.00	0.1	56	X5	SOD-123



## BZT52-C2V4 SERIES

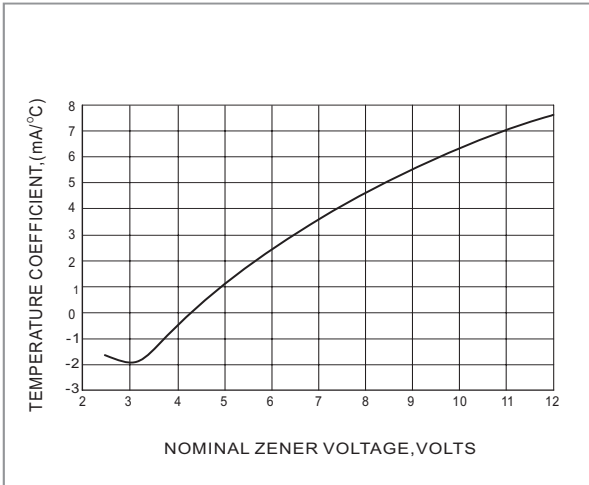


Fig.1 TEMPERATURE COEFFICIENTS

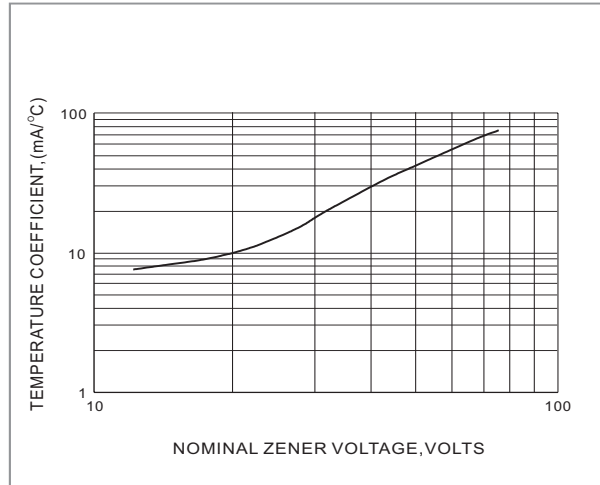


Fig.2 TEMPERATURE COEFFICIENTS

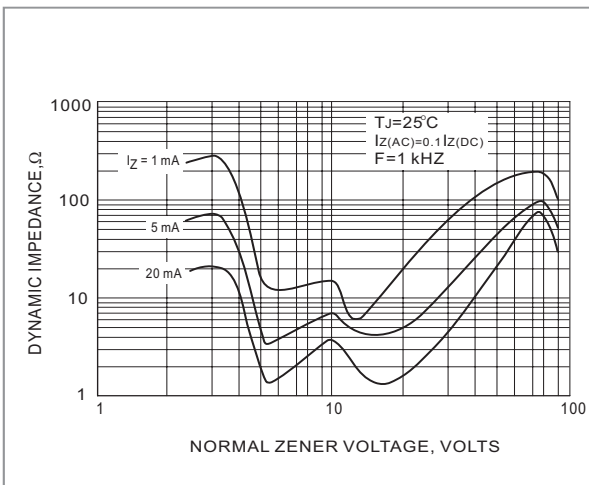


Fig.3 EFFECT OF ZENER VOLTAGE ON ZENER IMPEDANCE

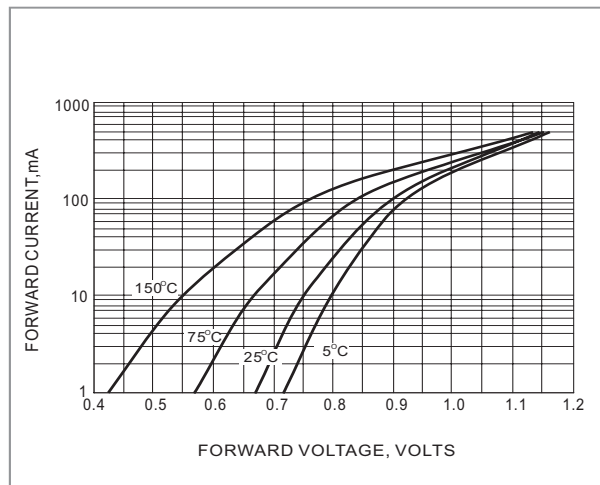


Fig.4 TYPICAL FORWARD VOLTAGE

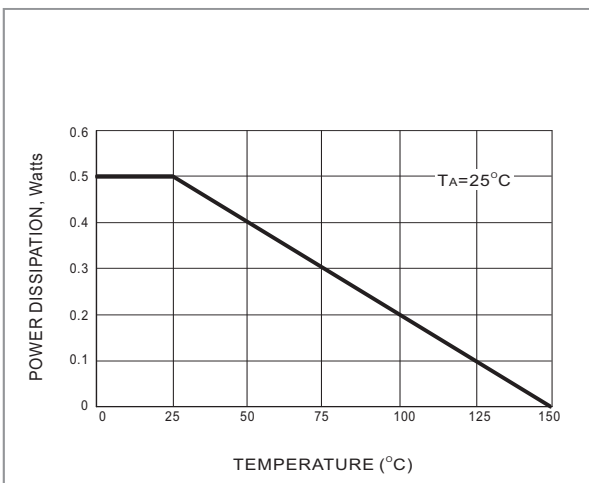


Fig.5 STEADY STATE POWER DERATING

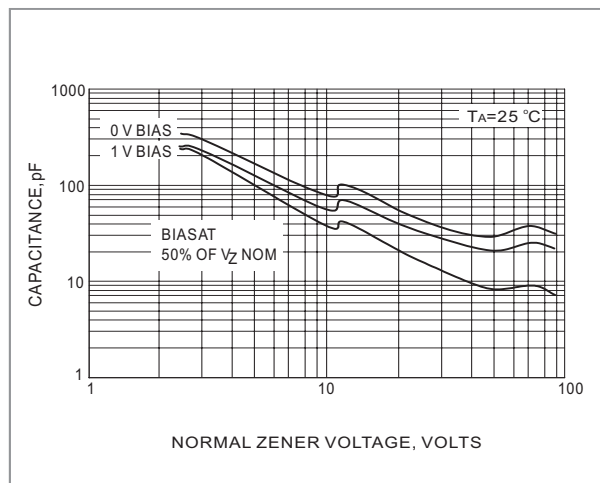


Fig.6 TYPICAL CAPACITANCE



## BZT52-C2V4 SERIES

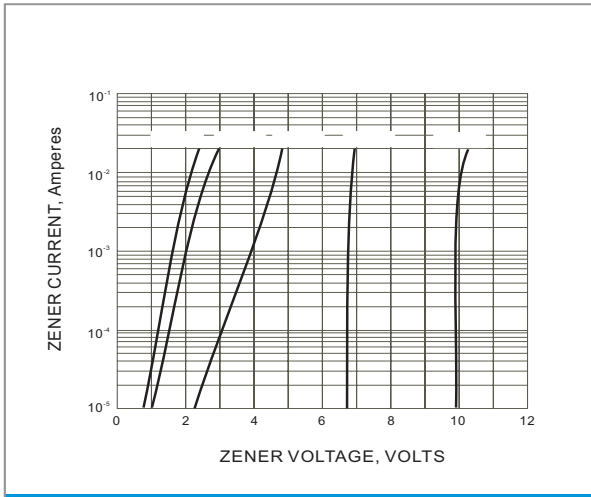


Fig.7 ZENER VOLTAGE VERSUS ZENER CURRENT

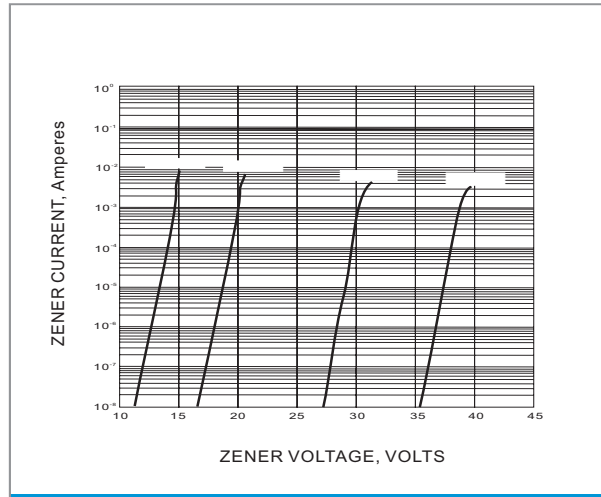


Fig.8 ZENER VOLTAGE VERSUS ZENER CURRENT


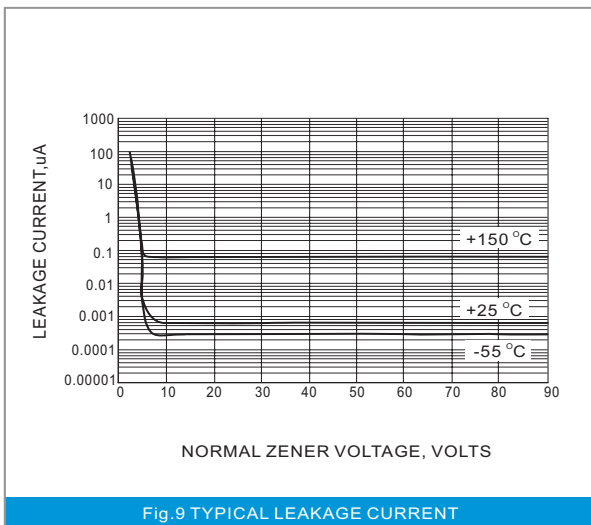


Fig.9 TYPICAL LEAKAGE CURRENT



# BZT52-C2V4 SERIES

## MOUNTING PAD LAYOUT

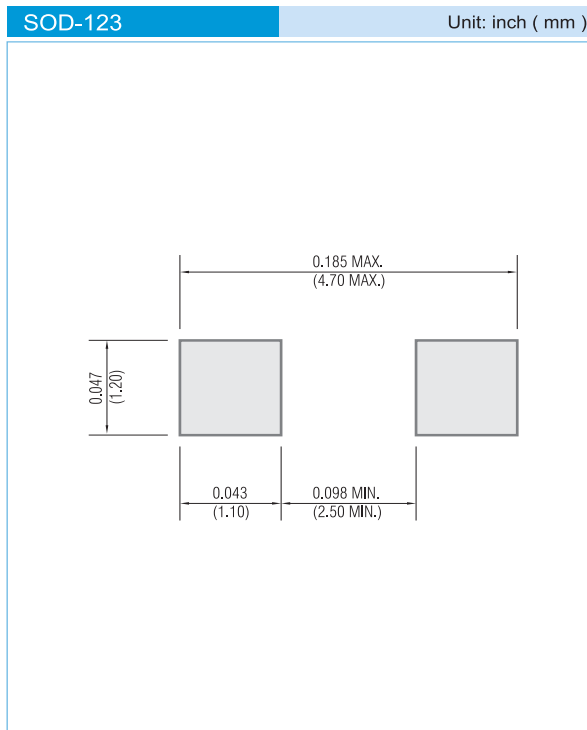

## ORDER INFORMATION

- Packing information
  - T/R - 10K per 13" plastic Reel
  - T/R - 3K per 7" plastic Reel

## LEGAL STATEMENT

### Copyright PanJit International, Inc 2005

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.