

Notice for TAIYO YUDEN products

Please read this notice before using the TAIYO YUDEN products.

REMINDERS

- Product information in this catalog is as of October 2011. All of the contents specified herein are subject to change without notice due to technical improvements, etc. Therefore, please check for the latest information carefully before practical application or usage of the Products.

Please note that Taiyo Yuden Co., Ltd. shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this catalog or individual specification.

- Please contact Taiyo Yuden Co., Ltd. for further details of product specifications as the individual specification is available.
- Please conduct validation and verification of products in actual condition of mounting and operating environment before commercial shipment of the equipment.
- All electronic components or functional modules listed in this catalog are developed, designed and intended for use in general electronics equipment.(for AV, office automation, household, office supply, information service, telecommunications, (such as mobile phone or PC) etc.). Before incorporating the components or devices into any equipment in the field such as transportation,(automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network (telephone exchange, base station) etc. which may have direct influence to harm or injure a human body, please contact Taiyo Yuden Co., Ltd. for more detail in advance. Do not incorporate the products into any equipment in fields such as aerospace, aviation, nuclear control, submarine system, military, etc. where higher safety and reliability are especially required.

In addition, even electronic components or functional modules that are used for the general electronic equipment, if the equipment or the electric circuit require high safety or reliability function or performances, a sufficient reliability evaluation check for safety shall be performed before commercial shipment and moreover, due consideration to install a protective circuit is strongly recommended at customer's design stage.

- The contents of this catalog are applicable to the products which are purchased from our sales offices or distributors (so called "TAIYO YUDEN' s official sales channel"). It is only applicable to the products purchased from any of TAIYO YUDEN' s official sales channel.
- Please note that Taiyo Yuden Co., Ltd. shall have no responsibility for any controversies or disputes that may occur in connection with a third party's intellectual property rights and other related rights arising from your usage of products in this catalog. Taiyo Yuden Co., Ltd. grants no license for such rights.
- Caution for export**
Certain items in this catalog may require specific procedures for export according to "Foreign Exchange and Foreign Trade Control Law" of Japan, "U.S. Export Administration Regulations", and other applicable regulations. Should you have any question or inquiry on this matter, please contact our sales staff.

SAW/FBAR DEVICES (FILTER / DUPLEXERS)



REFLOW

FEATURES


- Low Insertion Loss
- High Attenuation
- Small Size Package
- High Reliability with Hermetic Sealing (MSL1)
- Environmentally Conscious

APPLICATIONS


- UMTS (W-CDMA)
- GSM
- CDMA
- LTE
- GPS
- Other

ORDERING CODE

(A) Previous Rule (applied to products registered on March 31, 2010 or before.)

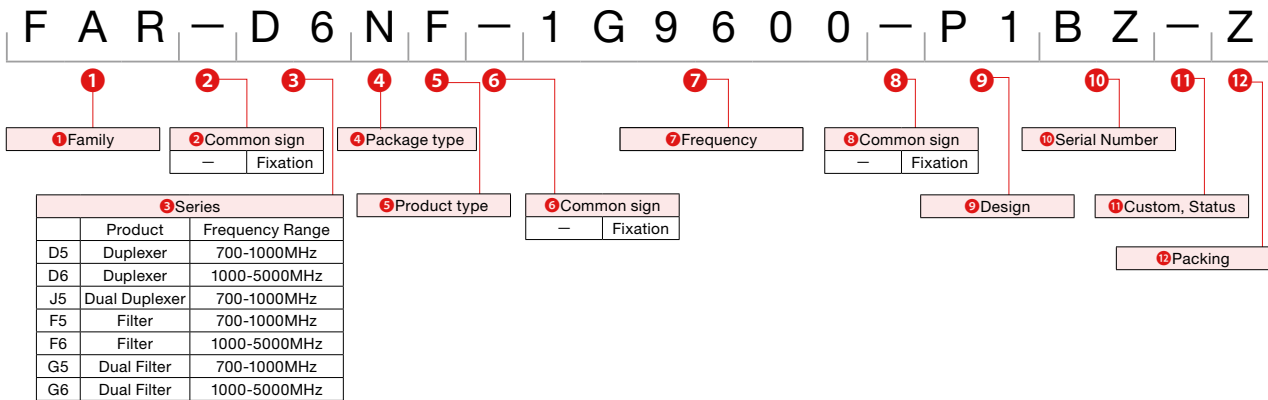


(B) New Rule (applied to products registered on April 1, 2010 or later.)

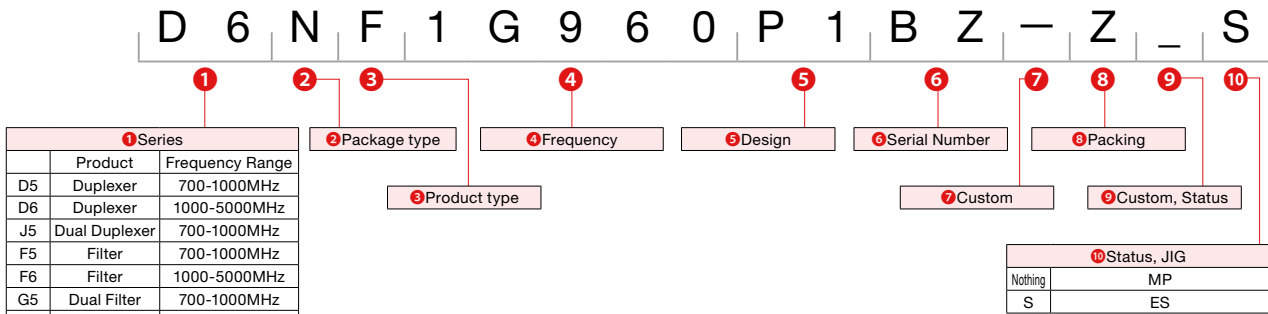


* For further details, please contact to TAIYO YUDEN Co.,Ltd.

EXTERNAL DIMENSIONS/STANDARD QUANTITY

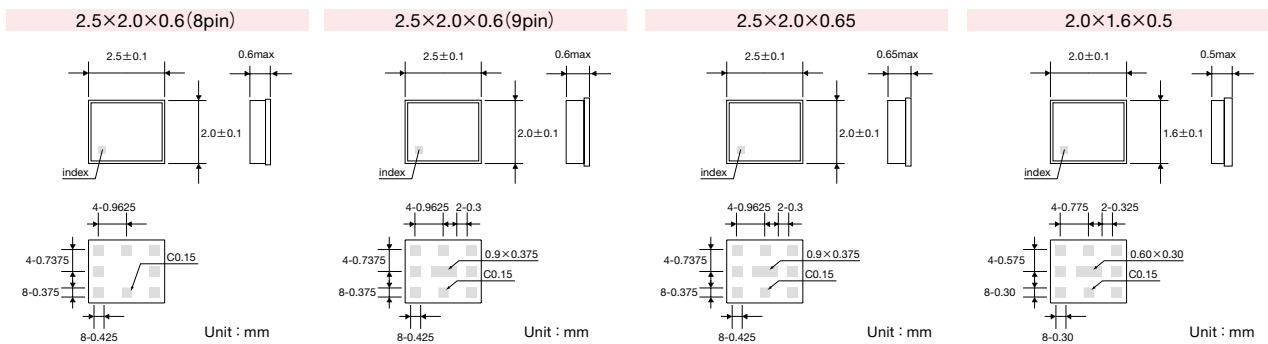

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

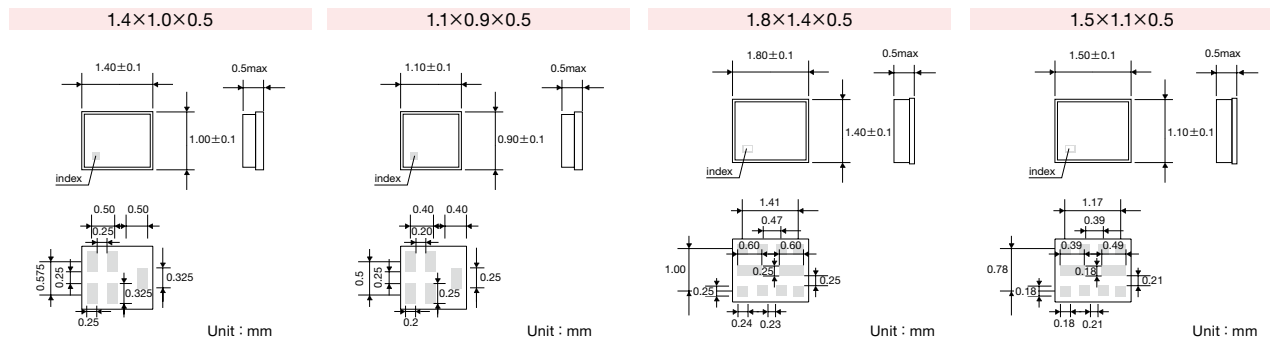

● 2G Frequency Allocation

GSM

GSM Band	3GPP Band	Name	Region	Use	Tx (MHz)	Rx (MHz)
850	V	GSM850	US	GPRS, EDGE	824-849	869-894
900	VIII	EGSM	CN/EU	GPRS, EDGE	880-915	925-960
1800	III	DCS	CN/EU	GPRS, EDGE	1710-1785	1805-1880
1900	II	GSM1900	US	GPRS, EDGE	1850-1910	1930-1990

● 3G Frequency Allocation

3GPP/FDD (W-CDMA/LTE)

3GPP Band	3GPP2 Band Class	Name (Block)	Region	Use (Status)	Tx (MHz)	Rx (MHz)
I	6	2G	EU, JP, CN	W-CDMA	1920-1980	2110-2170
II	1, (14)	1.9G	US	W-CDMA	1850-1910	1930-1990
III	8	1800	EU	LTE	1710-1785	1805-1880
IV	15	—	US	W-CDMA	1710-1755	2110-2155
V	0	850	US	W-CDMA	824-849	869-894
VI	—	800	JP	W-CDMA	830-840	875-885
VII	13	2.5G	EU	LTE	2500-2570	2620-2690
VIII	9	900	EU	W-CDMA	880-915	925-960
IX	—	1.7G	JP	W-CDMA	1750-1785	1845-1880
X	—	—	US	W-CDMA	1710-1770	2110-2170
XI	—	1.5G	JP	W-CDMA/LTE	1427.9-1452.9 (1427.9-1447.9)	1475.9-1500.9 (1475.9-1495.9)
XII	—	Lower 700 (A,B,C)	US	LTE	698-716	728-746
XIII	—	Upper 700 (C)	US	LTE	777-787	746-756
XIV	—	Upper 700 (D)	US	LTE	788-798	758-768
XV	—	—	—	—	1900-1920	2600-2620
XVI	—	—	—	—	2010-2025	2585-2600
XVII	—	Lower 700 (B,C)	US	LTE	704-716	734-746
XVIII	0-3	New 800	JP	CDMA2000 or LTE	815-830	860-875
XIX	—	Extended 800	JP	W-CDMA or LTE	830-845	875-890
XX	—	—	EU	LTE	832-862	791-821
XXI	—	Extended 1.5G	JP	LTE	1447.9-1462.9	1495.9-1510.9

3GPP/TDD

3GPP Band	3GPP2 Band Class	Name	Region	Use (Status)	Tx (MHz)	Rx (MHz)
33	—	—	—	—	1900-1920	1900-1920
34	—	—	—	—	2010-2025	2010-2025
35	—	—	—	—	1850-1910	1850-1910
36	—	—	—	—	1930-1990	1930-1990
37	—	—	—	—	1910-1930	1910-1930
38	—	—	—	—	2570-2620	2570-2620
39	—	—	—	—	1880-1920	1880-1920
40	—	—	—	—	2300-2400	2300-2400

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

● 3G Frequency Allocation

3GPP2(CDMA2000)

3GPP2 Band Class	3GPP Band	Name	Region	Use	Tx(MHz)	Rx(MHz)
0	V	CDMA	US, CN, KR	CDMA2000	824-849	869-894
0-2	(V)	J-CDMA (6MHz)	JP	CDMA2000	824-830	869-875
0-3	—	J-CDMA (Plan)	JP	CDMA2000 or LTE	815-824	860-869
1	II	PCS	US	CDMA2000	1850-1910	1930-1990
2	—	—	—	—	872-909, 880-915	917-954, 925-960
3	—	J-CDMA (27MHz)	JP	CDMA2000	887-925	832-870
4	—	K-PCS	KR	CDMA2000	1750-1780	1840-1870
5	—	CDMA450	EU	CDMA2000	452-484	462-494
6	I	J-CDMA (IMT)	JP	CDMA2000	1920-1980	2110-2170
7	—	—	—	—	776-794	746-764
8	III	—	—	—	1710-1785	1805-1880
9	VIII	—	—	—	880-915	925-960
10	—	Secondary	US	CDMA2000	817-824	862-869
11	—	—	—	—	452-484	462-494
12	—	—	—	—	870-876	915-921
13	VII	—	—	—	2500-2570	2620-2690
14	(II)	PCS (G-Band)	US	CDMA2000	1850-1915	1930-1995
15	IV	AWS	US	CDMA2000	1710-1755	2110-2155

TD-SCDMA, PHS

3GPP Band	3GPP2 Band Class	Name	Region	Use	Tx(MHz)	Rx(MHz)
—	—	2G	CN	TD-SCDMA	2010-2025	2010-2025
—	—	1.9G	CN	TD-SCDMA	1880-1920	1880-1920
—	—	CORE XGP	JP	PHS	2545-2575	2545-2575

● OTHERS

Wireless LAN, Bluetooth, GPS

System	Name(Block)	Frequency(MHz)
Wireless LAN	IEEE 802.11	2400-2483.5
Wireless LAN	IEEE 802.11a	5150-5350
Bluetooth	IEEE 802.15.1	2400-2483.5
GPS	—	1574.42-1576.42

■ PART NUMBERS

● Duplexers

System	Part number	Package Size (mm)	Insertion Loss (dB)	Isolation (dB)	Remarks
W-CDMA I (2G)	FAR-D6JG-2G1400-D3FZ	2.5×2.0×0.65	1.4/1.7	54/47	9 Pin, B Type
	FAR-D6JH-2G1400-B1BT	2.5×2.0×0.65	1.4/1.7	58/48	9 Pin, B Type Rx : Bal.100ohm STD
	D6PE2G140P3AW	2.0×1.6×0.5	1.5/1.6	59/47	9 Pin, B Type Rx : Bal.100ohm
CDMA/W-CDMA V (850)	FAR-D5NG-881M50-M11Z	2.5×2.0×0.6	1.45/1.8	66/52	9 Pin, B Type New
	FAR-D5PF-881M50-M3E7	2.0×1.6×0.5	1.5/1.8	58/51	9 Pin, A Type
	FAR-D5NE-881M50-P1A9	2.5×2.0×0.6	1.6/1.8	57/51	9 Pin, B Type Rx : Bal.100ohm
	FAR-D5NE-881M50-P1A6Q	2.5×2.0×0.6	1.6/1.7	60/53	9 Pin, B Type 100ohm, New
	FAR-D5PE-881M50-P3EZ	2.0×1.6×0.5	1.4/1.7	59/52	9 Pin, B Type Rx : Bal.100ohm
	FAR-D5PE-881M50-P3EY	2.0×1.6×0.5	1.4/1.7	59/52	9 Pin, A Type Rx : Bal.100ohm
	FAR-D5PF-911M50-M3J7	2.0×1.6×0.5	1.5/1.8	61/44	9 Pin, A Type
J-CDMA (BW:27MHz)	FAR-D5NH-942M50-M1Y9	2.5×2.0×0.65	1.8/2.3	58/50	9 Pin, B Type
	FAR-D5NF-942M50-P1GZ	2.5×2.0×0.65	1.9/2.3	58/50	9 Pin, B Type 100ohm, STD
	FAR-D5NF-942M50-P1GWQ	2.5×2.0×0.65	1.9/2.3	59/54	9 Pin, B Type 100ohm, GPS High Att.
	D5NE942M5P1G9	2.5×2.0×0.6	1.7/2.0	60/53	9 Pin, B Type 100ohm
	D5PE942M5P3GT	2.0×1.6×0.5	1.7/2.2	58/54	9 Pin, B Type 100ohm
PCS/W-CDMA II (1.9G)	FAR-D6NH-1G9600-M1Z9	2.5×2.0×0.65	2.2/3.1	55/50	9 Pin, B Type
	FAR-D6NH-1G9600-M1Z6	2.5×2.0×0.65	2.3/2.7	55/53	9 Pin, B Type Low Rx IL
	D6HK1G960DK12	2.5×2.0×0.65	2.0/2.3	58/52	9 Pin, B Type
	FAR-D6NF-1G9600-P1BT	2.5×2.0×0.65	2.5/2.8	54/55	9 Pin, B Type 100ohm, Low Rx IL
	D6NF1G960P1BR	2.5×2.0×0.65	2.5/3.4	56/53	9 Pin, B Type 100ohm High GPS Att. & Rx Isol.
	D6HH1G960BH95	2.5×2.0×0.65	2.3/2.5	56/53	9 Pin, B Type 100ohm, STD
	D6HH1G960BH97	2.5×2.0×0.65	2.6/2.5	59/59	9 Pin, B Type 100ohm High GPS Att. & Rx Isol.
	FAR-D6JH-2G1325-B1YZ	2.5×2.0×0.65	1.5/1.7	57/51	9 Pin, B Type Rx : Bal.100ohm
W-CDMA IV (DCS/2G)	D6JG2G132D3GZ	2.5×2.0×0.65	1.6/1.9	53/52	9 Pin, B Type
	D6PE2G132P3DW	2.0×1.6×0.5	1.9/1.8	55/47	9 Pin, B Type Rx : Bal.100ohm
	D5NE782M0P1D6	2.5×2.0×0.6	2.2/2.2	60/55	9 Pin, B Type Rx : Bal.100ohm
LTE XIII (Upper C)	D5NG782M0M15Z	2.5×2.0×0.6	2.1/2.7	62/57	9 Pin, B Type
	FAR-D5NE-740M00-P1C9	2.5×2.0×0.6	1.7/2.0	61/58	9 Pin, B Type Rx : Bal.100ohm
LTE XVII (Lower B,C)	D5NG740M0M14Z	2.5×2.0×0.6	1.6/1.7	62/56	9 Pin, B Type
	CDMA BC0+BC10	D5NF878M0P1ET	2.5×2.0×0.65	1.9/2.5	58/50

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

PART NUMBERS

CDMA/GSM850

System	Part number	Package Size (mm)	Insertion Loss (dB)	Attenuation (dB)	Remarks
CDMA Tx	FAR-F5KB-836M50-B4ER	1.4×1.0×0.5	1.7	44	100ohm input
	FAR-F5KB-836M50-B4EG	1.4×1.0×0.5	1.6	42	200ohm input
	F5QA836M5M2AB	1.1×0.9×0.5	1.6	34	—
CDMA/GSM850 Tx	FAR-F5KA-836M50-D4DF	1.4×1.0×0.5	1.9	44	High Att. type
	FAR-F5KB-881M50-B4ED	1.4×1.0×0.5	1.5	61	100ohm output
CDMA Rx	FAR-F5KY-881M50-B4UZ	1.4×1.0×0.5	1.5	61	100ohm, High Att.
	FAR-F5KB-881M50-B4EJ	1.4×1.0×0.5	1.4	64	200ohm output
	F5QG881M5P2KG	1.1×0.9×0.5	1.5	56	100ohm, High Att., Low Loss type
	FAR-F5KA-881M50-D4DB	1.4×1.0×0.5	1.7	56	High Att. type
GSM850/CDMA Rx	FAR-F5QA-881M50-M2AF	1.1×0.9×0.5	1.6	46	—
	FAR-F5KB-881M50-B4EA	1.4×1.0×0.5	1.7	53	150ohm output
GSM850 Rx	FAR-F5QB-881M50-P2BA	1.1×0.9×0.5	1.3	63	150ohm output

EGSM

System	Part number	Package Size (mm)	Insertion Loss (dB)	Attenuation (dB)	Remarks
EGSM Tx	FAR-F5KA-897M50-D4DC	1.4×1.0×0.5	2.2	16	High Att. type
	FAR-F5QA-897M50-M2AC	1.1×0.9×0.5	2.3	18	—
	FAR-F5KA-942M50-D4DD	1.4×1.0×0.5	2.0	34	High Att. type
EGSM Rx	F5QA942M5M2AG	1.1×0.9×0.5	2.2	40	—
	FAR-F5KB-942M50-B4EB	1.4×1.0×0.5	1.6	26	150ohm output
	FAR-F5QB-942M50-P2BB	1.1×0.9×0.5	1.6	28	150ohm output
	FAR-F5QG-942M50-P2KB	1.1×0.9×0.5	2.2	56	100ohm, High Att.

DCS

System	Part number	Package Size (mm)	Insertion Loss (dB)	Attenuation (dB)	Remarks
DCS Tx	FAR-F6KA-1G7475-D4CY	1.4×1.0×0.5	2.5	30	
DCS Rx	FAR-F6KA-1G8425-D4CK	1.4×1.0×0.5	2.1	20	
	FAR-F6KB-1G8425-B4GA	1.4×1.0×0.5	1.5	14	150ohm output
	FAR-F6QB-1G8425-P2BF	1.1×0.9×0.5	1.6	17	150ohm output

US-PCS/GSM1900

System	Part number	Package Size (mm)	Insertion Loss (dB)	Attenuation (dB)	Remarks
US-PCS Tx	FAR-F6KA-1G8800-L4AF	1.4×1.0×0.5	2.4	35	Full band, High Att.
	FAR-F6KB-1G8800-B4GS	1.4×1.0×0.5	2.3	28	100ohm input
	F6KB1G880B4GH	1.4×1.0×0.5	2.4	42	200ohm input
US-PCS Rx	FAR-F6KA-1G9600-D4DQ	1.4×1.0×0.5	3.4	44	High Att.
	FAR-F6KA-1G9600-D4MT	1.4×1.0×0.5	3.4	43	High Att./New
	FAR-F6KB-1G9600-B4GP	1.4×1.0×0.5	2.1	23	100ohm output
	FAR-F6KY-1G9600-B4UU	1.4×1.0×0.5	2.6	50	100ohm, High Att.
	F6KY1G960B4NF	1.4×1.0×0.5	2.8	50	100ohm output
GSM1900/US-PCS Rx	FAR-F6KA-1G9600-D4CR	1.4×1.0×0.5	2.0	18	
	F6KA1G960D4CZ	1.4×1.0×0.5	1.8	18	Low loss type
GSM1900 Rx	FAR-F6KB-1G9600-B4GB	1.4×1.0×0.5	1.6	18	150ohm output
	F6QB1G960P2BK	1.1×0.9×0.5	1.5	15	150ohm output

GSM Dual

System	Part number	Package Size (mm)	Insertion Loss (dB)	Attenuation (dB)	Remarks
EGSM+DCS Rx	FAR-G6KZ-1G8425-Y4WZ	1.8×1.4×0.5	1.8/1.6	31/16	EGSM 150ohm output DCS 150ohm output
	G6QF1G842N2HA	1.5×1.1×0.5	1.6/1.6	31/17	EGSM 150ohm output DCS 150ohm output
DCS+EGSM Rx	FAR-G6KZ-1G8425-Y4WY	1.8×1.4×0.5	1.6/1.8	16/31	DCS 150ohm output EGSM 150ohm output
	G6QF1G842N2GC	1.5×1.1×0.5	1.6/1.6	17/31	DCS 150ohm output EGSM 150ohm output
GSM850+EGSM Rx	FAR-G5QC-942M50-N2FB	1.5×1.1×0.5	1.5/1.8	50/29	GSM850 150ohm output EGSM 150ohm output
GSM850+EGSM Rx (Common Input)	FAR-G5KT-942M50-Y4RW	1.8×1.4×0.5	1.9/2.2	50/25	GSM850 150ohm output EGSM 150ohm output
	FAR-G5QD-942M50-N2DZ	1.5×1.1×0.5	1.9/2.2	48/26	GSM850 150ohm output EGSM 150ohm output
EGSM+GSM850 Rx	FAR-G5KC-942M50-Y4YW	1.8×1.4×0.5	1.8/1.4	31/54	EGSM 150ohm output GSM850 150ohm output
	FAR-G5QC-942M50-N2CD	1.5×1.1×0.5	1.7/1.4	29/51	EGSM 150ohm output GSM850 150ohm output
	G5QJ942M5M2MA	1.5×1.1×0.5	1.7/2.3	52/37	EGSM 50ohm output GSM850 50ohm output
EGSM+GSM850 Rx (Common Input)	FAR-G5KT-942M50-Y4RZ	1.8×1.4×0.5	2.2/1.9	25/52	EGSM 150ohm output GSM850 150ohm output
	FAR-G5QD-942M50-N2DB	1.5×1.1×0.5	2.5/2.0	25/55	EGSM 150ohm output GSM850 150ohm output
EGSM+GSM850 Rx (Common Output)	G5KW942M5Y4YF	1.8×1.4×0.5	2.3/1.8	35/40	EGSM 150ohm output GSM850 150ohm output
	G5QE942M5N2ED	1.5×1.1×0.5	2.4/1.9	32/37	EGSM 150ohm output GSM850 150ohm output
DCS+GSM1900 Rx	FAR-G6QC-1G9600-N2FA	1.5×1.1×0.5	1.9/1.7	17/13	DCS 150ohm output GSM1900 150ohm output
	FAR-G6KC-1G9600-Y4YY	1.8×1.4×0.5	1.9/1.6	14/16	GSM1900 150ohm output DCS 150ohm output
GSM1900+DCS Rx	FAR-G6QC-1G9600-N2CB	1.5×1.1×0.5	1.7/1.7	15/16	GSM1900 150ohm output DCS 150ohm output
	G6QC1G960N2CH	1.5×1.1×0.5	1.6/1.2	13/15	GSM1900 150ohm output DCS 150ohm output
	FAR-G6KT-1G9600-Y4RY	1.8×1.4×0.5	1.9/1.8	13/18	GSM1900 150ohm output DCS 150ohm output
GSM1900+DCS Rx (Common Input)	G6QD1G960N2DA	1.5×1.1×0.5	1.9/1.8	15/18	GSM1900 150ohm output DCS 150ohm output
	G6KT1G960Y4RU	1.8×1.4×0.5	1.9/1.8	13/18	GSM1900 150ohm output DCS 150ohm output
DCS+GSM1900 Rx (Common Input)	G6QD1G960N2DY	1.5×1.1×0.5	1.9/1.8	15/18	DCS 150ohm output GSM1900 150ohm output
	G6KW1G960Y4YE	1.8×1.4×0.5	2.5/2.5	20/12	GSM1900 150ohm output DCS 150ohm output
GSM1900+DCS Rx (Common Output)	G6QE1G960N2EC	1.5×1.1×0.5	2.5/2.5	18/13	GSM1900 150ohm output DCS 150ohm output
	FAR-G6KG-1G9600-Y4ZF	1.8×1.4×0.5	1.6/1.5	15/58	GSM1900 150ohm output GSM850 150ohm output
GSM1900+850 Rx	FAR-G6QF-1G9600-N2GA	1.5×1.1×0.5	1.6/1.4	14/54	GSM1900 150ohm output GSM850 150ohm output

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

PART NUMBERS

GPS

System	Part number	Package Size (mm)	Insertion Loss (dB)	Attenuation (dB)	Remarks
GPS	FAR-F6KA-1G5754-L4AA	1.4×1.0×0.5	0.9	—	Low loss type
	FAR-F6KA-1G5754-L4AJ	1.4×1.0×0.5	0.9	—	Low loss, High Att.
	FAR-F6KA-1G5754-L4AB	1.4×1.0×0.5	0.44	—	Ultra Low loss type
	FAR-F6QA-1G5754-H2JC	1.1×0.9×0.5	1.11	—	High Att.
	F6QA1G575H2JD	1.1×0.9×0.5	0.87	—	Low loss type
	F6QA1G575H2JE	1.1×0.9×0.5	1.27	—	High Att.
	FAR-F6KB-1G5754-B4GE	1.4×1.0×0.5	1.1	—	100ohm, Low loss
	FAR-F6KB-1G5754-B4GU	1.4×1.0×0.5	1.2	—	100ohm, High Att.
GPS (GNSS)	F6KB1G575B4HQ	1.4×1.0×0.5	1.1	—	100ohm, High Att.
	FAR-F6KA-1G5859-D4MS	1.4×1.0×0.5	1.0(1.2)	—	—
	FAR-F6KB-1G5859-B4HR	1.4×1.0×0.5	1.1(1.4)	—	100ohm output

W-CDMA


System	Part number	Package Size (mm)	Insertion Loss (dB)	Attenuation (dB)	Remarks
W-CDMA I (2G) Tx	FAR-F6KA-1G9500-D4CD	1.4×1.0×0.5	2.2	36	
	FAR-F6KA-1G9500-D4DG	1.4×1.0×0.5	1.6	38	Low loss, High Att.
	FAR-F6KB-1G9500-B4GJ	1.4×1.0×0.5	2.1	34	100ohm input
	F6QA1G950M2AA	1.1×0.9×0.5	1.8	38	Low loss, High Att.
W-CDMA I (2G) Rx	FAR-F6KA-2G1400-D4CG	1.4×1.0×0.5	1.9	39	
	F6KA2G140D4DW	1.4×1.0×0.5	1.9	48	High Att.
	FAR-F6KB-2G1400-B4GC	1.4×1.0×0.5	1.7	39	100ohm output
	FAR-F6KY-2G1400-B4UY	1.4×1.0×0.5	1.8	64	100ohm, High Att.
W-CDMA I(2G)+II(1900) Rx	F6QG2G140P2KA	1.1×0.9×0.5	1.7	55	100ohm, High Att.
	G6QL2G140M2PA	1.5×1.1×0.5	1.9/3.0	48/41	
J-CDMA (2G/B.W.20MHz) Rx	G6QH2G140N2LA	1.5×1.1×0.5	2.0/3.2	53/42	100ohm output
W-CDMA IV (1.7G/2G) Tx	FAR-F6KB-2G1200-B4GQ	1.4×1.0×0.5	1.4	48	100ohm output
W-CDMA VIII (EGSM) Tx	FAR-F6KA-1G7400-D4DE	1.4×1.0×0.5	1.5	44	
	FAR-F5KA-897M50-D4VW	1.4×1.0×0.5	2.6	38	High Att.
W-CDMA VIII (EGSM) Rx	F5KA897M5D4MH	1.4×1.0×0.5	1.6	20	Low Loss
	F5KA942M5D4MYB	1.4×1.0×0.5	1.9	53	High Att.
	FAR-F5KB-942M50-B4ES	1.4×1.0×0.5	2.4	29	100ohm output
	FAR-F5KY-942M50-B4UW	1.4×1.0×0.5	2.0	57	100ohm, High Att.
W-CDMA V (850)+ VIII(900) Rx	G5QH942M5N2LN	1.5×1.1×0.5	1.6/2.0	56/50	100ohm output
W-CDMA IX (1.7G) Tx	FAR-F6KA-1G7675-D4CT	1.4×1.0×0.5	1.8	31	
W-CDMA IX (1.7G) Rx	FAR-F6KA-1G8625-D4DH	1.4×1.0×0.5	1.8	40	
	FAR-F6KB-1G8625-B4GT	1.4×1.0×0.5	2.1	40	100ohm output
W-CDMA V (850) + I (2G) Tx	FAR-G6KG-1G9500-Y4PG	1.8×1.4×0.5	1.9/2.4	42/43	V (850) 200ohm in I (2G) 200ohm in
W-CDMA I (2G) + V (850) Rx	FAR-G6KG-2G1400-Y4SH	1.8×1.4×0.5	1.6/1.5	42/64	I (2G) 200ohm out V (850) 200ohm out
LTE XIII (Upper C) Tx	FAR-F5KA-782M00-D4VP	1.4×1.0×0.5	1.5	55	
LTE XIII (Upper C) Rx	FAR-F5KY-751M00-B4UQ	1.4×1.0×0.5	1.6	50	100ohm output
LTE XVII (Lower B,C) Tx	FAR-F5KA-710M00-D4VQ	1.4×1.0×0.5	1.2	32	
LTE XVII (Lower B,C) Rx	FAR-F5KY-740M00-B4UR	1.4×1.0×0.5	1.4	60	100ohm output
LTE XX	F5KA847M0D4ML	1.4×1.0×0.5	1.7	52	
TD LTE XXXVIII Rx	F6KB2G595B4HS	1.4×1.0×0.5	2.6	38	150ohm output
TD LTE XL Rx	F6KB2G350B4HT	1.4×1.0×0.5	2.7	37	150ohm output

Other


System	Part number	Package Size (mm)	Insertion Loss (dB)	Attenuation (dB)	Remarks
ISM900 (B.W.26MHz)	FAR-F5QA-915M00-M2AK	1.1×0.9×0.5	1.8	—	
TD-SCDMA	FAR-F6KA-2G0175-D4DR	1.4×1.0×0.5	1.8	—	High Att
	FAR-F6KA-1G9000-D4DS	1.4×1.0×0.5	1.6	—	
	FAR-F6KA-1G9000-D4MZ	1.4×1.0×0.5	1.4	—	Low IL
TD-SCDMA (2G+1.9G)	FAR-G6QJ-2G0175-M2MD	1.5×1.1×0.5	1.3/1.4	—	2 IN/2 OUT
TD-SCDMA (1.9G+2G)	G6QJ2G017M2RD	1.5×1.1×0.5	1.6/2.0	—	1 IN/2 OUT
Wireless LAN	FAR-F6KA-2G4418-D4CU	1.4×1.0×0.5	2.6	—	+10dBm
	FAR-F6KA-2G4418-A4VA	1.4×1.0×0.5	3.0	—	+23dBm
	FAR-F6KA-2G4500-A4VD	1.4×1.0×0.5	1.9	40	Low IL,+19dBm
	F6KA2G436A4VE	1.4×1.0×0.5	2.5	47	BW=72MHz,+24dBm
	F6KA2G450A4VF	1.4×1.0×0.5	1.9	35	BW=100MHz,+24dBm , Low loss
	F6KA2G441A4VG	1.4×1.0×0.5	2.4	36	BW=83.5MHz,+24dBm
	F6KA2G466A4VJ	1.4×1.0×0.5	2.8	40	BW=68MHz,+24dBm

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.


FAR-D5NF-942M50-P1GWQ

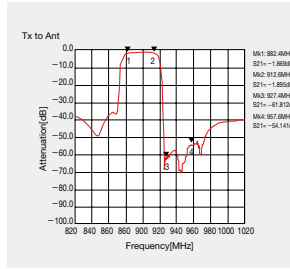


Pass-band (Tx to Ant)

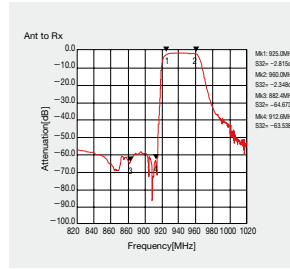

Pass-band (Ant to Rx)

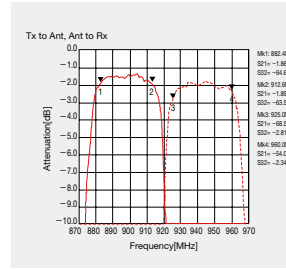


In-band Characteristic

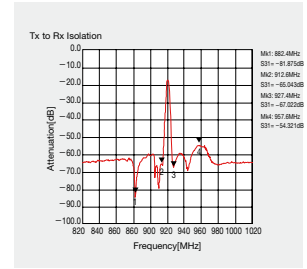


Tx to Rx Isolation

* These data include loss that comes from the test board. (Approximately 0.05dB)

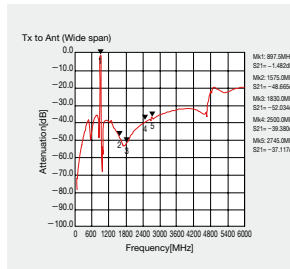


Wide-band (Tx to Ant)

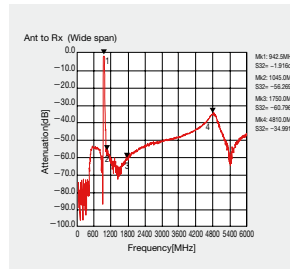


Wide-band (Ant to Rx)


FAR-F6KY-2G1400-B4UY

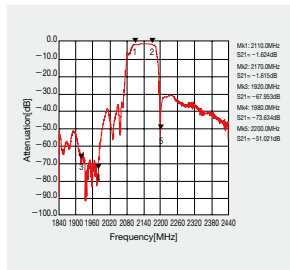


Pass-band Characteristic

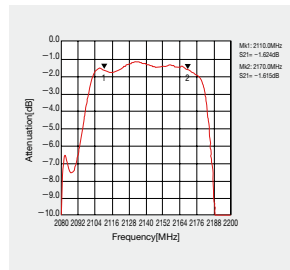


In-band Characteristic

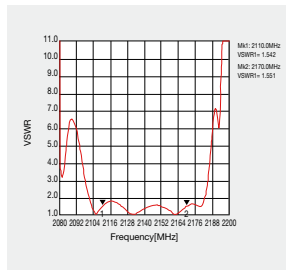

VSWR (INPUT)

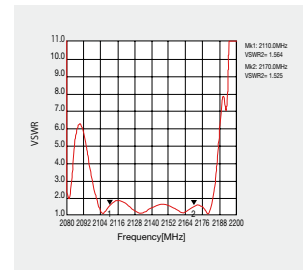

VSWR (OUTPUT)

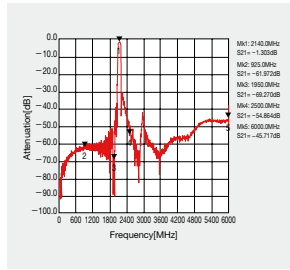

Wide-band Characteristic

HIGH FREQUENCY PRODUCTS


* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

PACKAGING

① Minimum Quantity

Type	Size (mm)	Code&Quantity (Pieces)							
Duplexer	3.0×2.5	Z	3000			U	10000		
	2.5×2.0	Z	3000			U	10000		
	2.0×1.6	Z	3000					Y	15000
Single Filter	2.0×1.6	Z	3000					Y	15000
	1.4×1.0	Z	3000					Y	15000
	1.1×0.9			J	5000			Y	15000
Dual Filter	2.0×1.6	Z	3000					Y	15000
	1.8×1.4	Z	3000					Y	15000
	1.5×1.1			J	5000			Y	15000

② Tape material

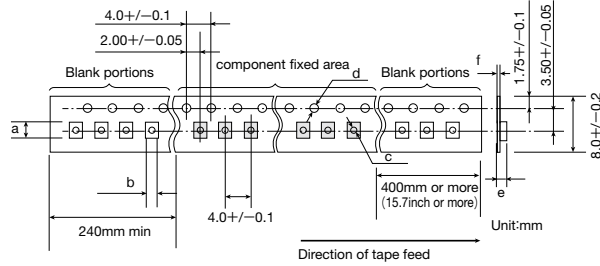

● Taping dimensions

Type	Size (mm)	a	b	c	d	e	f
Duplexer	3.0×2.5	3.4±0.1	2.85±0.1	1.05±0.05	1.55±0.05	1.0±0.1	0.25±0.05
	2.5×2.0	2.8±0.1	2.3±0.1	1.5±0.1/-0	1.5±0.1/-0	1.0±0.1/-0.0	0.25±0.05
	2.0×1.6	2.4±0.1	2.0±0.1	1.05±0.05	1.5±0.1/-0	0.90 - 0.05	0.25±0.05
Single Filter	2.0×1.6	2.4±0.1	2.0±0.1	1.05±0.05	1.5±0.1/-0	0.90 - 0.05	0.25±0.05
	1.4×1.0	1.7±0.1	1.3±0.1	0.5±0.05	1.5±0.1/-0	0.63±0.05	0.20±0.05
	1.1×0.9	1.3±0.1	1.1±0.1	0.5±0.05	1.55±0.05	0.63±0.05	0.20±0.05
Dual Filter	2.0×1.6	2.4±0.1	2.0	1.05±0.05	1.5±0.1/-0	0.90 - 0.05	0.25±0.05
	1.8×1.4	2.2±0.1	1.8	0.5±0.05	1.55±0.05	0.8±0.1	0.30±0.05
	1.5×1.1	1.8±0.1	1.4	0.5±0.05	1.5±0.1/-0	0.7±0.1	0.25±0.05


Unit : mm

● Material of Tape (Conductive)


Tape : Polystyrene
Top cover tape : Polyethylene terephthalate (PET) and Polyethylene

③ Top Tape Strength

The top tape requires a peel-off force of 0.1 to 1.0N in the direction of the arrow as illustrated below.

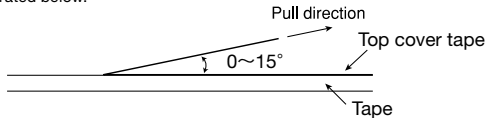

④ Reel size

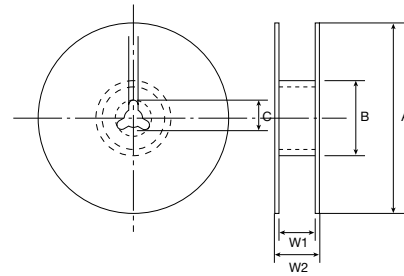

● Material of Reel



Material : Polystyrene + Carbon
Characteristics : Conform to EIAJ-ET-7200A
Color : Black
Surface resistance (reference value) : $10^9 \Omega/\text{sq Max.}$

Code	Quantity	A	B	C	W1	W2
Z	3,000 pcs	$\phi 180.0 \pm 0.0 / -1.5$	$\phi 66.0 \pm 0.5$	$\phi 13.0 \pm 0.2$	$9.0 \pm 1.0 / -0.0$	11.4 ± 1.0
J	5,000 pcs	$\phi 180.0 \pm 0.0 / -1.5$	$\phi 66.0 \pm 0.5$	$\phi 13.0 \pm 0.2$	$9.0 \pm 1.0 / -0.0$	11.4 ± 1.0
U	10,000 pcs	$\phi 330.0 \pm 2.0$	$\phi 100.0 \pm 1.0$	$\phi 13.0 \pm 0.2$	9.4 ± 1.0	13.4 ± 1.0
Y	15,000 pcs	$\phi 330.0 \pm 2.0$	$\phi 100.0 \pm 1.0$	$\phi 13.0 \pm 0.2$	9.4 ± 1.0	13.4 ± 1.0

Unit : mm


⑤ Reel label and Reel C-Label sticking and Winding method

● Surface

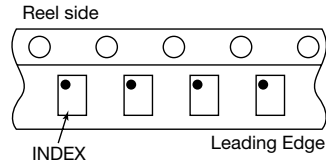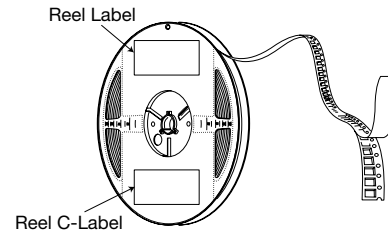


* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

Filter

1. Terminal strength	
Specifications	No damage to be found.
Conditions	Bending Test. according to IEC60068-2-21(JISC60068-2-21)
	
2. Mechanical shock	
Specifications	After testing, meet the specified characteristics at a room temperature.
Conditions	Apply 14700m/s ² for 0.5ms 5 times for each of 6 directions. according to IEC68-2-27(JISC60068-2-27).
3. Vibration	
Specifications	After testing, meet the specified characteristics at a room temperature.
Conditions	With 1.5 mm of whole amplitude at 10 to 55 Hz of frequency, and 98m/s ² of acceleration at 55 to 500Hz, apply a vibration for 2 hours for each of 3 directions, period is 15 minutes(10 to 500 to 10Hz)
4. Drop 1	
Specifications	After testing, meet the specified characteristics at a room temperature.
Conditions	Drop 3 times onto concrete floor from the height of 1.0m.
5. Drop 2	
Specifications	After testing, meet the specified characteristics at a room temperature.
Conditions	Drop with 150g weight 3 times in each 6 direction onto concrete floor from the height of 1.8m.
6. Temperature cycling	
Specifications	After testing, meet the specified characteristics at a room temperature.
Conditions	Temp. range -40 to +100°C. 500cycle.
7. Static humidity	
Specifications	After testing, meet the specified characteristics at a room temperature.
Conditions	+85°C, 90% to 95%RH, apply DC5V, 1000hours.
8. High temperature storage life	
Specifications	After testing, meet the specified characteristics at a room temperature.
Conditions	+100°C, 1000hours.
9. Low temperature storage life	
Specifications	After testing, meet the specified characteristics at a room temperature.
Conditions	-40°C, 1000hours.
10. Solderability 1	
Specifications	More than 90% of area of terminals to be covered with the solder. A change of the remarkable appearance do not have it.
Conditions	Lead-free Solder paste, Reflow : Peak temperature 245°C
11. Solderability 2	
Specifications	More than 90% of area of terminals to be covered with the solder. A change of the remarkable appearance do not have it.
Conditions	Sn-Pb Solder paste, Reflow : Peak temperature 235°C
12. Solder heat resistance	
Specifications	After testing, meet the specified characteristics at a room temperature. A change of the remarkable appearance do not have it.
Conditions	Temperature profile of reflow soldering is as follows (Figure).

◆ Recommended temperature profile of reflow soldering
 Figure shows recommended temperature profile of reflow soldering in the case of lead-free solder alloy Sn3.0Ag0.5Cu.
 Suitable condition for solder heating is differed depending on composition and manufacturing method.
 Please contact to solder manufacturer for the details.

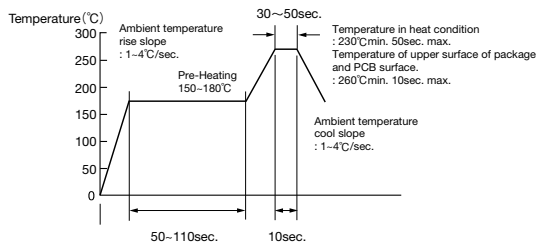


* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
 For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

Duplexer

1. Terminal strength	
Specifications	No damage to be found.
Conditions	Bend width 4mm, hold for 5+/-1 sec. according to IEC60068-2-21(JISC60068-2-21)
2. Mechanical shock	
Specifications	After testing, meet the specified characteristics at a room temperature.
Conditions	Apply 14700m/s ² for 0.5ms 5 times for each of 6 directions. according to IEC68-2-27(JISC60068-2-27).
3. Vibration	
Specifications	After testing, meet the specified characteristics at a room temperature.
Conditions	With 1.5 mm of whole amplitude at 10 to 55 Hz of frequency, and 98m/s ² of acceleration at 55 to 500Hz, apply a vibration for 2 hours for each of 3 directions, period is 15 minutes(10 to 500 to 10Hz)
4. Drop 1	
Specifications	After testing, meet the specified characteristics at a room temperature.
Conditions	Drop 3 times onto concrete floor from the height of 1.0m.
5. Drop 2	
Specifications	After testing, meet the specified characteristics at a room temperature.
Conditions	Drop with 150g weight 3 times in each 6 direction onto concrete floor from the height of 1.8m.
6. Temperature cycling	
Specifications	After testing, meet the specified characteristics at a room temperature.
Conditions	Temp. range -40 to +100°C. 500cycle.
7. Static humidity	
Specifications	After testing, meet the specified characteristics at a room temperature.
Conditions	+85°C, 90% to 95%RH, apply DC5V, 1000hours.
8. High temperature storage life	
Specifications	After testing, meet the specified characteristics at a room temperature.
Conditions	+100°C, 1000hours.
9. Low temperature storage life	
Specifications	After testing, meet the specified characteristics at a room temperature.
Conditions	-40°C, 1000hours.
10. High Temperature Bias	
Specifications	After testing, meet the specified characteristics at a room temperature.
Conditions	+50°C, +29dBm, 50000hours.
11. Solderbility 1	
Specifications	More than 90% of area of terminals to be covered with the solder. A change of the remarkable appearance do not have it.
Conditions	Lead-free Solder paste, Reflow : Peak temperature 245°C
12. Solderbility 2	
Specifications	More than 90% of area of terminals to be covered with the solder. A change of the remarkable appearance do not have it.
Conditions	Sn-Pb Solder paste, Reflow ; Peak temperature 235°C
13. Solder heat resistance	
Specifications	After testing, meet the specified characteristics at a room temperature. A change of the remarkable appearance do not have it.
Conditions	Temperature profile of reflow soldering is as follows (Figure).

◆Recommended temperature profile of reflow soldering

Figure shows recommended temperature profile of reflow soldering in the case of lead-free solder alloy Sn3.0Ag0.5Cu. Suitable condition for solder heating is differed depending on composition and manufacturing method. Please contact to solder manufacturer for the details.

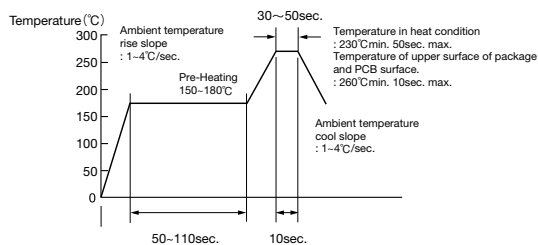

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.