



<p><b>SCHOTTKY BARRIER RECTIFIERS</b></p>	<p>REVERSE VOLTAGE - <b>20 to 200</b> Volts FORWARD CURRENT - <b>1.0</b> Amperes</p>
---	--


**FEATURES**

- Metal-Semiconductor junction with guard ring
- Epitaxial construction
- Low forward voltage drop
- High current capability
- The plastic material carries UL recognition 94V-0
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

**MECHANICAL DATA**

- Case : JEDEC SMB molded plastic
- Polarity : Color band denotes cathode
- Weight : 0.095 grams
- Mounting position : Any

**SMB**

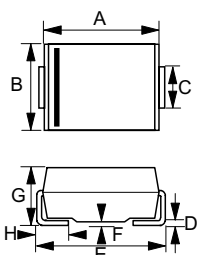

SMA		
DIM.	MIN.	MAX.
A	4.06	4.70
B	3.30	3.94
C	1.91	2.11
D	0.15	0.31
E	5.08	5.59
F	0.05	0.20
G	2.13	2.44
H	0.76	1.52

All Dimensions in millimeter

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**  
 Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%

PARAMETER	SYMBOL	B120B	B130B	B140B	B150B	B160B	B180B	B1100B	B1150B	B1120B	UNIT	
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	80	100	150	200	V	
Maximum RMS voltage	$V_{RMS}$	14	21	28	35	42	56	70	105	140	V	
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	80	100	150	200	V	
Maximum average forward rectified current	$I_F$	1.0									A	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	30.0									A	
Maximum Instantaneous Forward Voltage @ 1.0A	$V_F$	0.50			0.70		0.85	0.87	0.90		V	
Maximum DC Reverse Current @ TA=25°C at Rated DC Blocking Voltage @ TA=100°C	$I_R$	0.5					0.2					mA
		10.0					5.0					
Typical Junction Capacitance	$C_J$	70			60		50	35			pF	
Typical Thermal Resistance	$R_{\theta JA}$	70									°C/W	
Operating Temperature Range	$T_J$	-55 to +125									°C	
Storage Temperature Range	$T_{STG}$	-55 to +150									°C	



FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

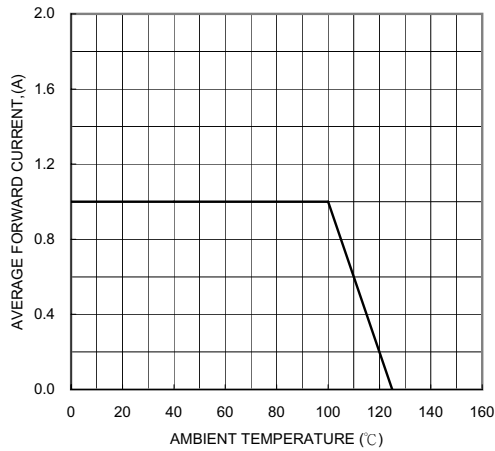


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

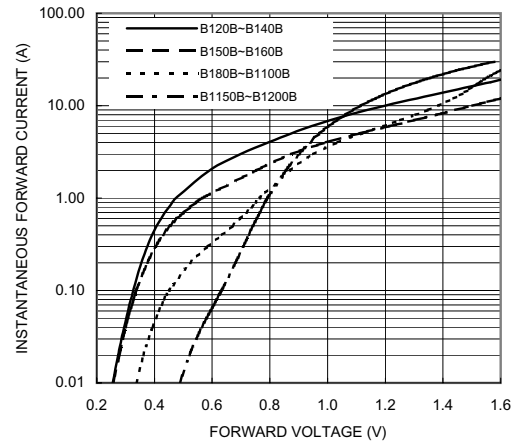


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

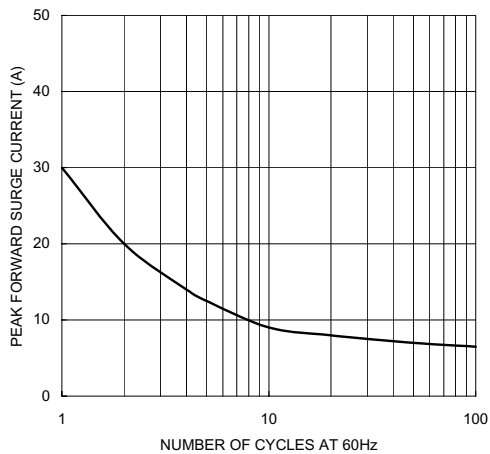


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

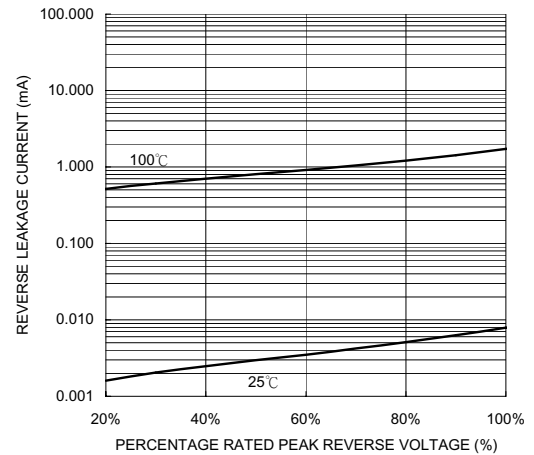


FIG. 5-TYPICAL JUNCTION CAPACITANCE

