

E-Series Surface Mount Mixer 880 – 915 MHz




Features

- LO Power +17 dBm
- Up to +13 dBm RF
- Surface Mount



SM-1 Package

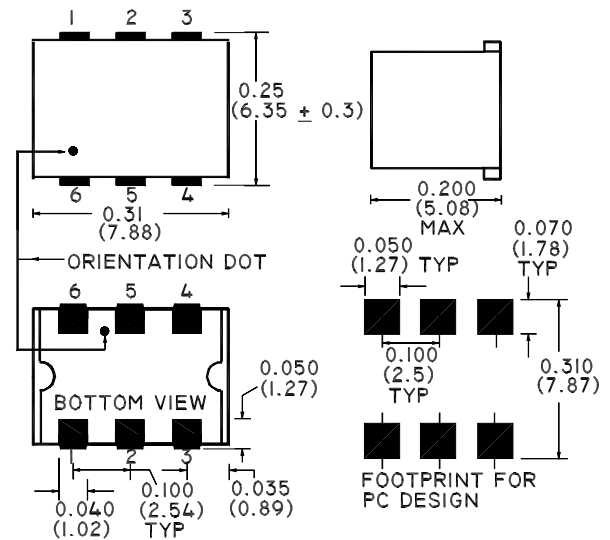

Description

M/A-COM's EMRS-6HX1 is a low drive, surface mount mixer suitable for use in wireless applications.

Electrical Specifications @ -10°C - +85°C, Z₀ = 50 Ohms, LO = +7dBm

Parameter	Units	Minimum	Typical	Maximum
Frequency Range				
RF 880 - 915	MHz	—	—	—
LO 1000 - 1130	MHz	—	—	—
IF 150 - 170	MHz	—	—	—
Conversion Loss 880 - 915 MHz	dB	—	5.5	8.0
Isolation (LO - RF) 1000 - 1130 MHz	dB	25	30	—
Isolation (LO - IF)				
RF Input for 1dB Compression	dBm	—	—	+13
IIP3	dBm	23	27	—
RF VSWR	—	1.7:1	2.0:1	2.3:1
LO VSWR	—	1.3:1	1.5:1	1.8:1
IF VSWR	—	1.0:1	1.2:1	1.4:1

V1.00 S 0727 G



M/A-COM Division of AMP Incorporated ■ North America: Tel. (800) 366-2266, Fax (800) 618-8883 ■ Asia/Pacific: Tel. +85 2 2111 8088, Fax +85 2 2111 8087 ■ Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

www.macom.com

AMP and Connecting at a Higher Level are trademarks.
Specifications subject to change without notice.



Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	50 mW
Peak IF Current	40 mA
Storage Temperature	-10°C to +85°C
Operating Temperature	-10°C to +85°C
Pin Temperature (10 Seconds)	260°C

Functional Configuration

Function	Pin No.
LO	1
RF	4
IF	5
Ground	2, 3, 6
Case Ground	—
Unconnected	—

V1.00 S 0727 G



M/A-COM Division of AMP Incorporated ■ North America: Tel. (800) 366-2266, Fax (800) 618-8883 ■ Asia/Pacific: Tel. +85 2 2111 8088, Fax +85 2 2111 8087 ■ Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

www.macom.com

AMP and Connecting at a Higher Level are trademarks.
Specifications subject to change without notice.

