

UF200 THRU UF2010

ULTRAFAST SWITCHING RECTIFIER


VOLTAGE - 50 to 1000 Volts CURRENT - 2.0 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound
- Void-free Plastic in DO-15 package
- 2.0 ampere operation at $T_A=55\text{ }^\circ\text{C}$ with no thermal runaway
- Exceeds environmental standards of MIL-S-19500/228
- Ultra fast switching for high efficiency

MECHANICAL DATA

- Case: Molded plastic, DO-15
- Terminals: Axial leads, solderable per MIL-STD-202, Method 208
- Polarity: Band denotes cathode
- Mounting Position: Any
- Weight: 0.015 ounce, 0.4 gram

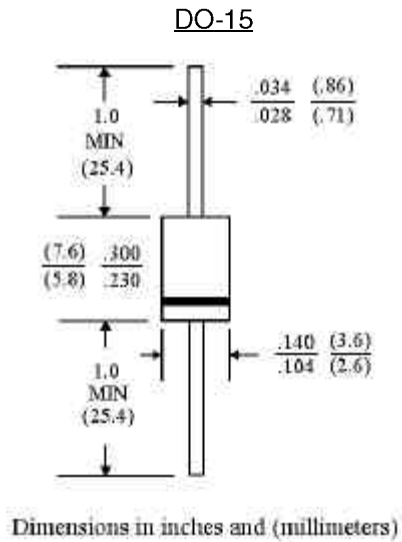

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 $^\circ\text{C}$ ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

	UF200	UF201	UF202	UF204	UF206	UF208	UF2010	UNITS
Peak Reverse Voltage, Repetitive ; V_{RM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
DC Blocking Voltage; V_R	50	100	200	400	600	800	1000	V
Average Forward Current, I_o @ $T_A=55\text{ }^\circ\text{C}$ 3.8" lead length, 60Hz, resistive or inductive load	2.0							A
Peak Forward Surge Current I_{FM} (surge) 8.3msec. single half sine-wave superimposed on rated load (JEDEC method)	60							A
Maximum Forward Voltage V_F @ 2.0A, 25 $^\circ\text{C}$	1.00		1.10		1.70			V
Maximum Reverse Current, @ Rated $T_J=25\text{ }^\circ\text{C}$	10.0							μgA
Reverse Voltage $T_J=100\text{ }^\circ\text{C}$	500							μgA
Typical Junction capacitance (Note 1) C_J	35							pF
Typical Junction Resistance (Note 2) $R_{\theta JKJA}$	45							$^\circ\text{C/W}$
Reverse Recovery Time $I_F=.5A, I_R=1A, I_{rr}=.25A$	50	50	50	50	75	75	75	ns
Operating and Storage Temperature Range	-55 TO +150							$^\circ\text{C}$

NOTES:

- Measured at 1 MHz and applied reverse voltage of 4.0 VDC
- Thermal resistance from junction to ambient and from junction to lead length 0.375"(9.5mm) P.C.B. mounted

RATING AND CHARACTERISTIC CURVES

UF200 THRU UF2010

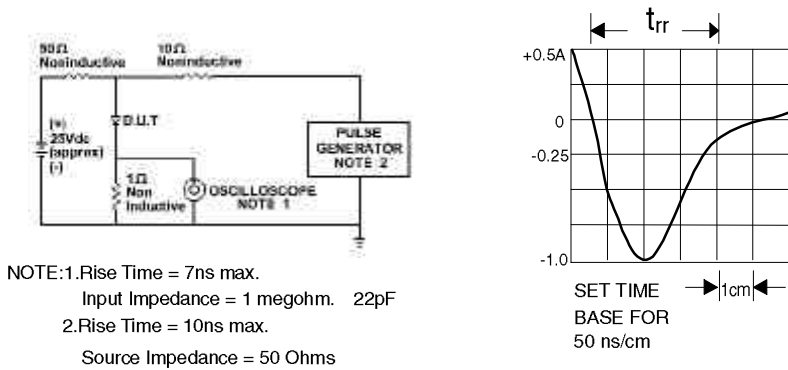


Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

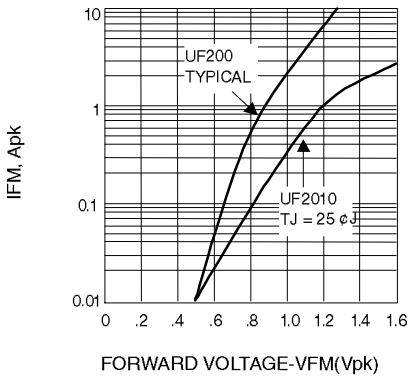


Fig. 2-FORWARD CHARACTERISTICS

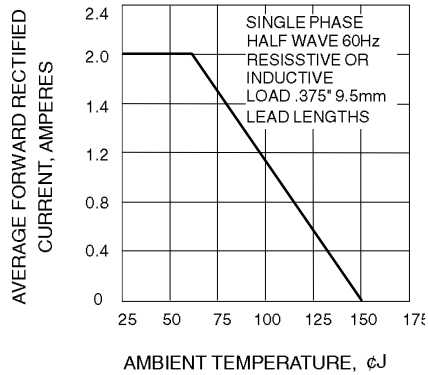


Fig. 3-FORWARD CURRENT DERATING CURVE

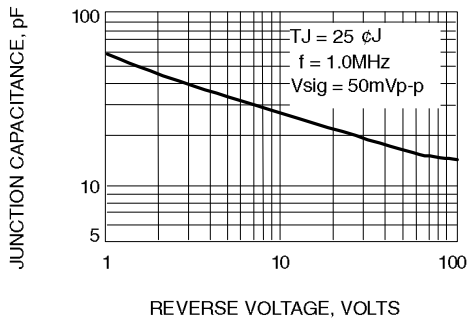


Fig. 4-TYPICAL JUNCTION CAPACITANCE

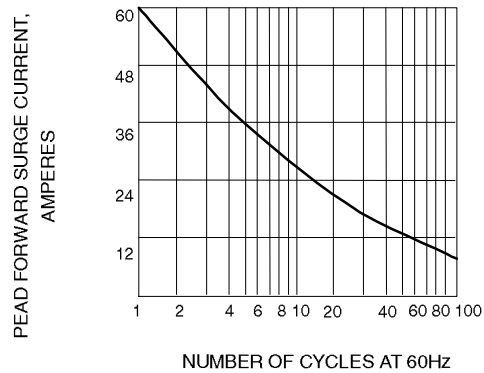


Fig. 5-PEAK FORWARD SURGE CURRENT