



1. Dimensions:

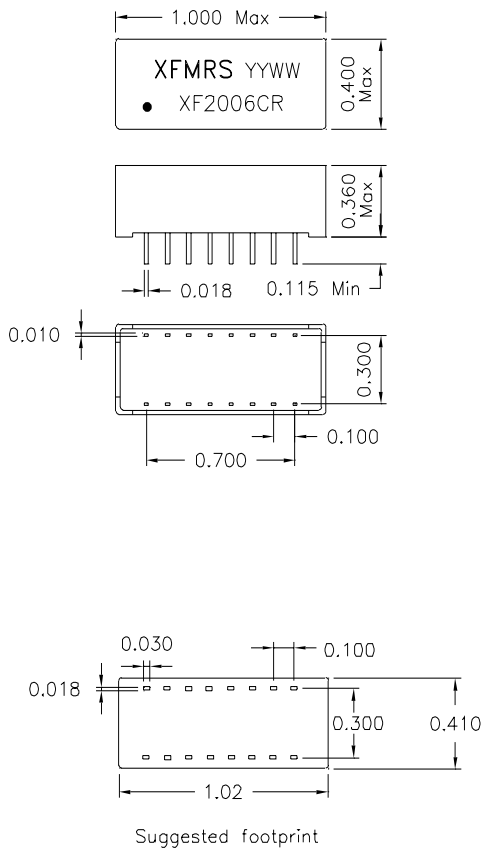

2. Schematic:

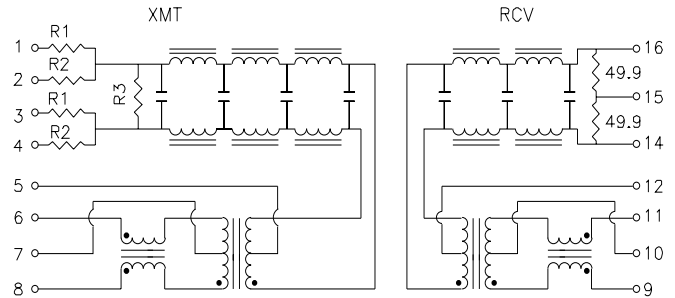

3. Electrical Specifications: @25°C

HIPOT: 1500VAC

Insertion Loss (1-10MHz): -1.0dB Maximum

INBAND VARIATION: 0.30dB Maximum

Return Loss (1-10MHz): -20dB Minimum

Cross Talk (1-10MHz): -30dB Minimum

*Attenuation @30MHz

Transmit -27dB Minimum

Receive -18dB Minimum

Cut off Frequency: 17MHz Typical

Turns Ratio: 1CT:1CT (XMT & RCV)

Nominal Input Impedance: 100 ohms (XMT)

Nominal Input Impedance: 100 ohms (RCV)

XFMRS Inc.	Title:	
	10 BASE - T FILTER	
UNLESS OTHERWISE SPECIFIED	P/N: XF2006CR	REV. A
TOLERANCES: .xxx ±0.010	DWN. 康玉坤	Sep-23-99
Dimensions in Inch	CHK. 李清儿	Sep-23-99
SCALE 1.5:1 SHT 1 OF 1	APP. Joe Huff	Sep-23-99

DOC. REV A/1

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION