



1. Dimensions:

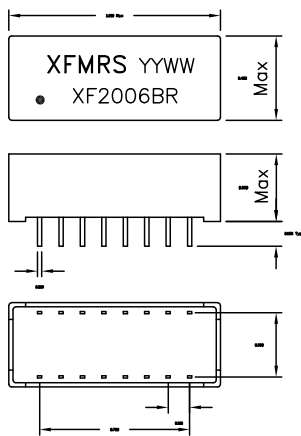

2. Schematic:

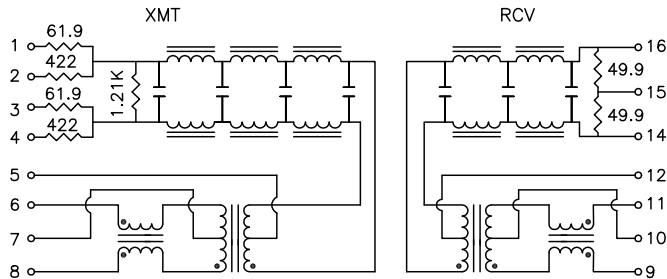

3. Electrical Specifications: @25°C

- Dielectric Withstanding Voltage: 1500VAC
- *Insertion Loss (1–10MHz): –1.0dB Maximum
- Return Loss (1–10MHz): –15dB Minimum
- Cross Talk (1–10MHz): –35dB Minimum
- *Attenuation @30MHz
 - Transmit –30dB Minimum
 - Receive –20dB Minimum
- Cut off Frequency: 17MHz Typical
- Turns Ratio: 1CT:1CT (XMT & RCV)
- Nominal Input Impedance: 200 ohms (XMT)
- Nominal Input Impedance: 100 ohms (RCV)
- *Excluding the losses due to resistors

XFMR5 Inc.	Title: 10 BASE – T FILTER	
	UNLESS OTHERWISE SPECIFIED	P/N: XF2006BR
TOLERANCES: .xxx ±0.010	DWN.	李小锋
Dimensions in Inch	CHK.	廖玉坤
SCALE 1.5:1 SHT 1 OF 1	APP.	Joe Huff
		REV. A
		May-31-02
		May-31-02
		May-31-02

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION