



**1. Dimensions:**

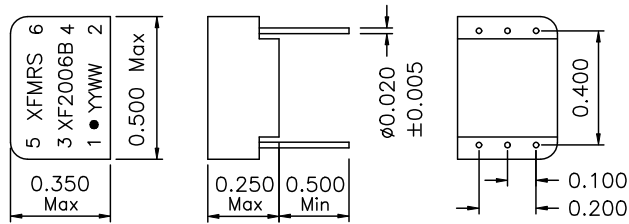

**2. Schematic:**



**3. Electrical Specifications: @25°C**

Isolation: 500 Vrms  
 Turns Ratio: 3:1:1 ±5% (Pri/Sec/Ter)  
 Pri. OCL: 200uH Minimum @100KHz 50mV  
 Cw/w: 7pF Maximum @100KHz 50mV (Pri/Sec)  
 PIN1-2 LL: 1.1uH Max @100KHz 50mV  
 © OTHER WINDINGS SHORTED  
 PRI DC Resistance: 0.90 Ohms Maximum  
 SEC & TER DC Resistance: 0.40 Ohms Maximum  
 ET-Const.: 5.0V/uS Min  
 Rise Time: 3.6nS Max

DOC. REV A/1

<b>XFMRs Inc</b>	Title: High Quality Networking Transformer	
	UNLESS OTHERWISE SPECIFIED	
	TOLERANCES: .xxx ±0.010	
	Dimensions in Inch	
P/N: XF2006B	REV. A	
DWN.	李清儿	Mar-23-99
CHK.	孙松	Mar-23-99
APP.	Joe Huff	Mar-26-99

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION

SCALE 2:1 SHT 1 OF 1