


# HAMAMATSU

## FLAT PANEL TYPE MULTIANODE PHOTOMULTIPLIER TUBE ASSEMBLY H10966 SERIES

52 mm Square, Bialkali Photocathode, 8-stage,  
8 × 8 Multianode, Small Dead Space, Fast Time Response

### APPLICATIONS

- Small Animal Imaging
- Compact Gamma Camera
- Scinti-mammography
- 2D Radiation Monitor

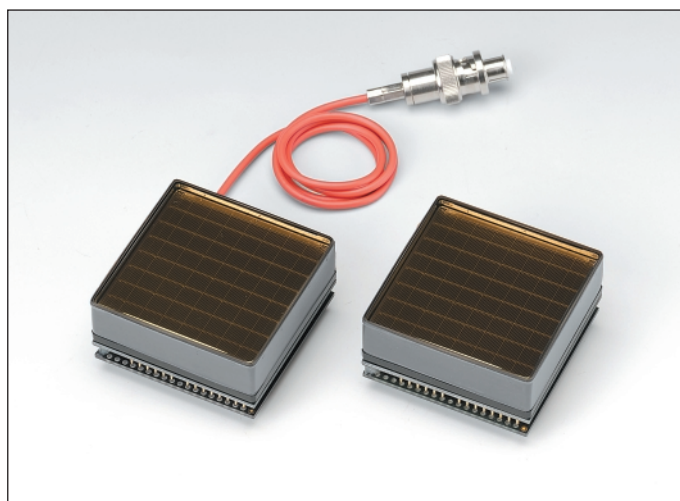

Left: H10966A (HV cable input type), Right: H10966B (HV pin input type)

### SPECIFICATIONS

#### GENERAL

Parameter		Description / Value	Unit
Spectral Response		300 to 650	nm
Peak Wavelength		400	nm
Photocathode Material		Bialkali	—
Window	Material	Borosilicate glass	—
	Thickness	1.5	mm
Dynode	Structure	Metal channel dynode	—
	Number of Stages	8	—
Number of Anode Pixels		64 (8 × 8 matrix)	—
Pixel Size / Pitch at Center		5.8 × 5.8 / 6.08	mm
Effective Area		49 × 49	mm
Dimensional Outline (W × H × D)		52 × 52 × 25.8	mm
Packing Density (Effective Area / External Size)		89	%
Weight		115 (H10966A), 95 (H10966B)	g
Operating Ambient Temperature		0 to +50	°C
Storage Temperature		-15 to +50	°C

#### MAXIMUM RATINGS (Absolute Maximum Values)

Parameter	Value	Unit
Supply Voltage (Between Anode to Cathode)	-1100	V
Average Anode Output Current in Total	100	μA
Divider Current at -1100 V	245	μA

Subject to local technical requirements and regulations, availability of products included in this promotional material may vary. Please consult with our sales office.  
Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2010 Hamamatsu Photonics K.K.

# FLAT PANEL TYPE MULTIANODE PHOTOMULTIPLIER TUBE ASSEMBLY H10966 SERIES

## CHARACTERISTICS (at 25 °C)

Parameter		Min.	Typ.	Max.	Unit
Cathode Sensitivity	Luminous <sup>(A)</sup>	50	60	—	μA/lm
	Blue Sensitivity Index (CS 5-58) <sup>(B)</sup>	8.0	9.5	—	—
Quantum Efficiency at 420 nm		—	24	—	%
Anode Sensitivity	Luminous <sup>(C)</sup>	5	20	—	A/lm
Gain <sup>(C)</sup>		$1 \times 10^5$	$3.3 \times 10^5$	—	—
Anode Dark Current per Channel <sup>(D)</sup>		—	0.06	—	nA
Anode Dark Current in Total <sup>(D)</sup>		—	4	30	nA
Time Response <sup>(E)</sup>	Rise Time <sup>(F)</sup>	—	0.4	—	ns
	Transit Time <sup>(G)</sup>	—	4	—	ns
Pulse Linearity per Channel ( $\pm 2\%$ deviation)		—	1.2	—	mA
Anode Uniformity (Condition Figure 3)		—	1:2	1:4	—
Cross-talk <sup>(H)</sup>		—	3	—	%

## NOTES

- (A): The light source is a tungsten filament lamp operated at a distribution temperature of 2856 K. Supply voltage is 150 volts between the cathode and all other electrodes connected together as anode.
- (B): The value is cathode output current when a blue filter (corning CS 5-58 polished to 1/2 stock thickness) is interposed between the light source and the tube under the same condition as Note (A).
- (C): Measured with the same light source as Note (A) and with the anode-to-cathode supply voltage and voltage distribution ratio shown in Table 1 below.
- (D): Measured with the same supply voltage and voltage distribution ratio as Note (C) after 30 minute storage in darkness.
- (E): Those are test data when a signal from a central channel of 64 anodes is used, while all photocathode are illuminated by pulsed light source.
- (F): The rise time is the time for the output pulse to rise from 10 % to 90 % of the peak amplitude when the whole photocathode is illuminated by a delta function light pulse.
- (G): The electron transit time is the interval between the arrival of delta function light pulse at the entrance window of the tube and the time when the anode output reaches the peak amplitude. In measurement, the whole photocathode is illuminated.
- (H): Supply Voltage: -1000 V Light Source: Tungsten filament lamp + blue filter (corning CS 5-58 polished to 1/2 stock thickness)  
Aperture Size: Approx. 5 mm × 5 mm  
One anode is illuminated through the aperture and the output of the adjacent anodes are calculated as relative value, with 100 % being equal to the output of the illuminated anode. The cross-talk is the relative value of the adjacent anodes expressed in %.

**Table 1: Voltage Distribution Ratio and Supply Voltage**

Electrodes	K	Dy1	Dy2	Dy3	Dy4	Dy5	Dy6	Dy7	Dy8	GR	P
Distribution Ratio	1	1	1	1	1	1	1	1	1	1	0.5

Supply Voltage: -1000 V, K: Cathode, Dy: Dynode, GR: Guard Ring P: Anode

Figure 1: Typical Spectral Response

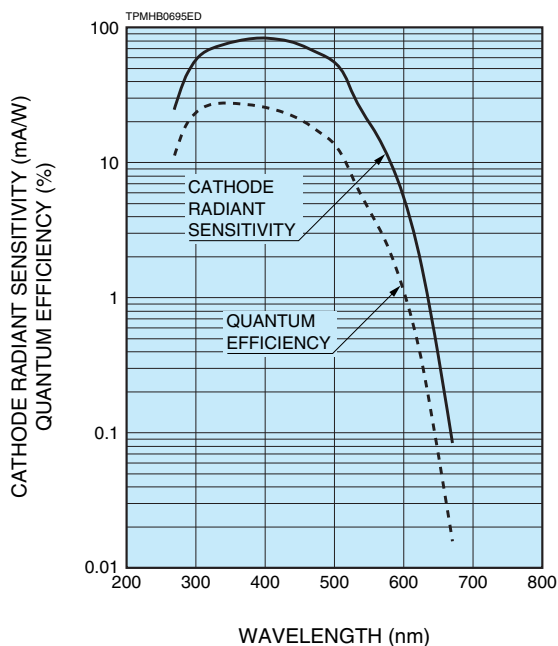


Figure 2: Typical Gain Characteristics


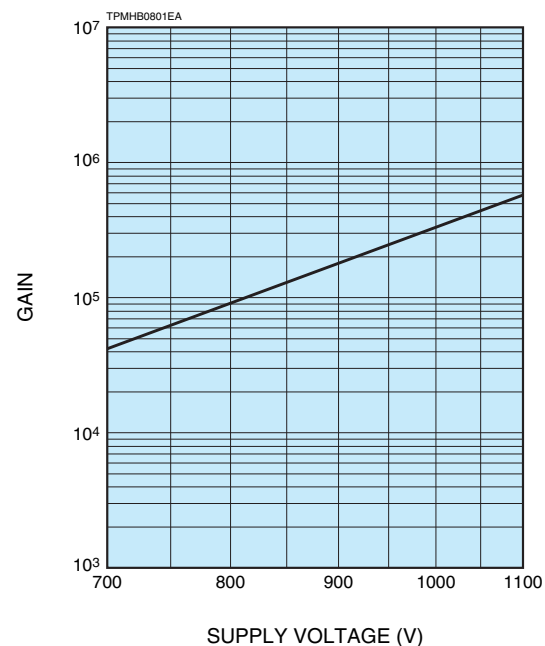



Figure 3: Anode Uniformity (Example)

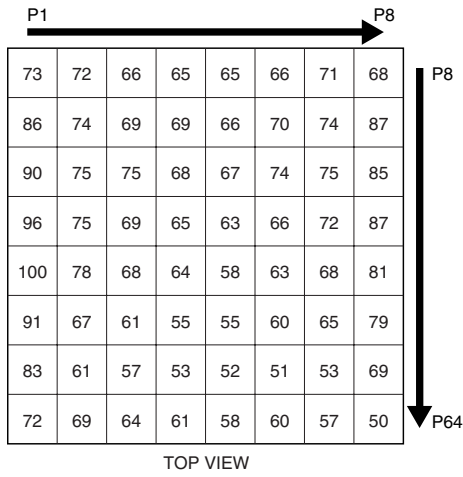

SUPPLY VOLTAGE: -1000 V  
 LIGHT SOURCE: TUNGSTEN LAMP with BLUE FILTER (DC LIGHT)  
 SPOT ILLUMINATION (APERTURE SIZE): 6 mm square on each channel

TPMHB0802EA

Figure 4: Anode Matrix and Separation Mark

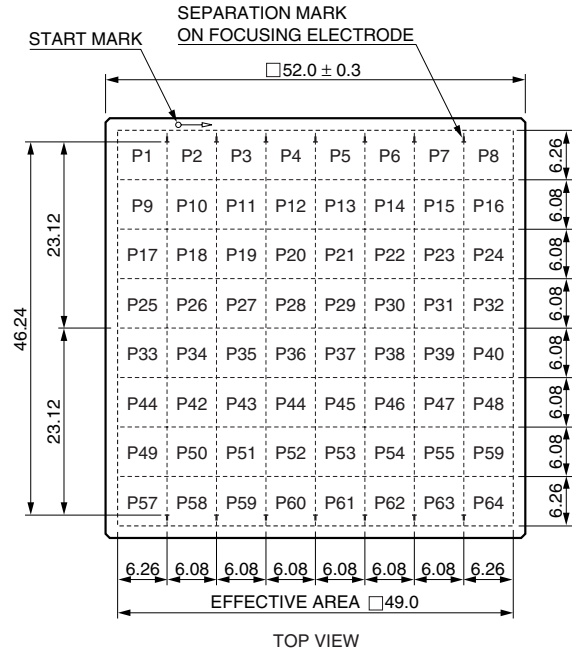


The start mark and the separation marks are put on an electrode plate inside.

TPMHB0708EB

Figure 5: Dimensional Outline (Unit: mm)

H10966A

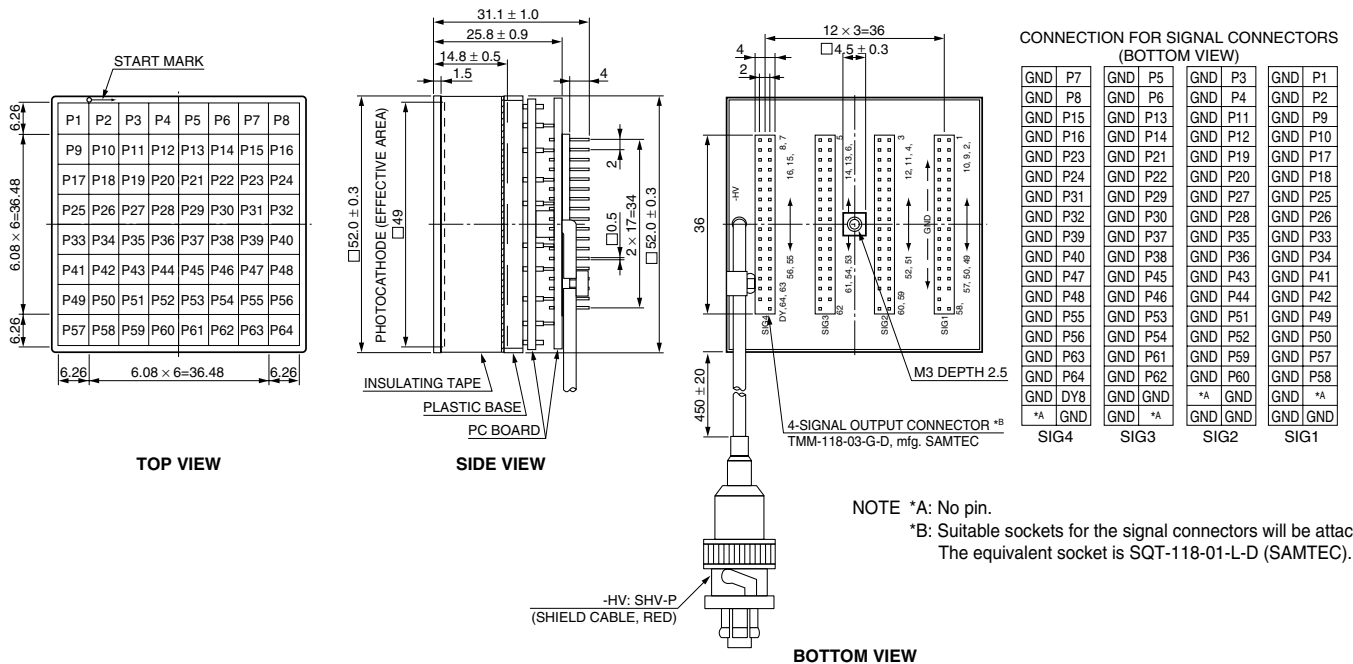

TPMHA0559EA

# FLAT PANEL TYPE MULTIANODE PHOTOMULTIPLIER TUBE ASSEMBLY H10966 SERIES

Figure 6: Dimensional Outline (Unit: mm)


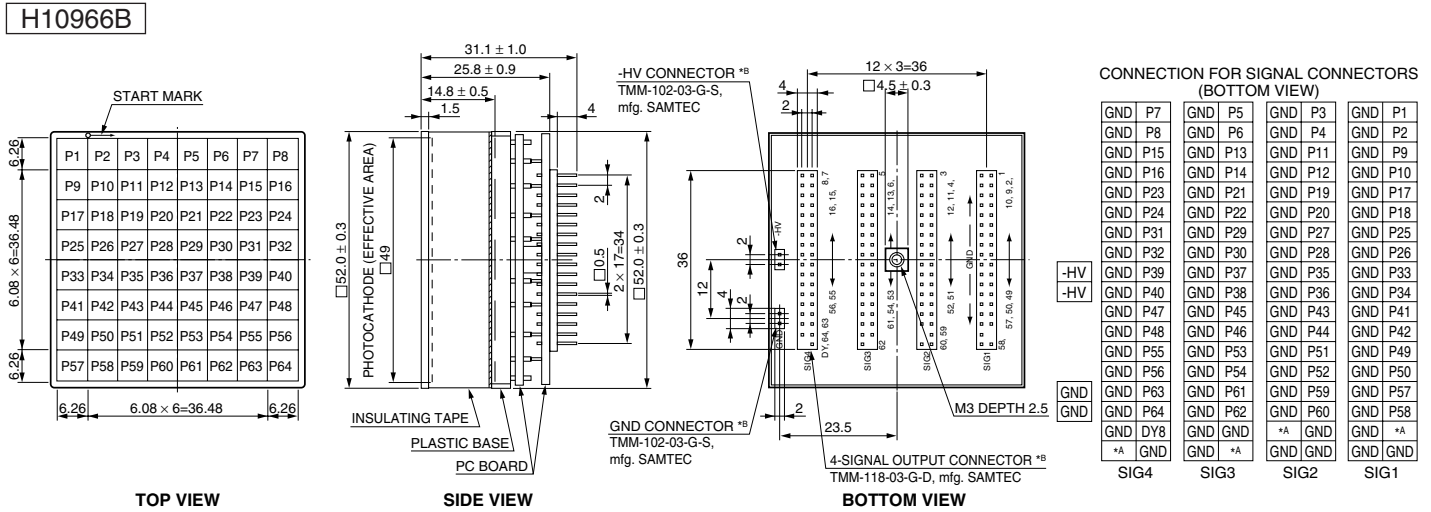


Figure 7: Internal Circuit

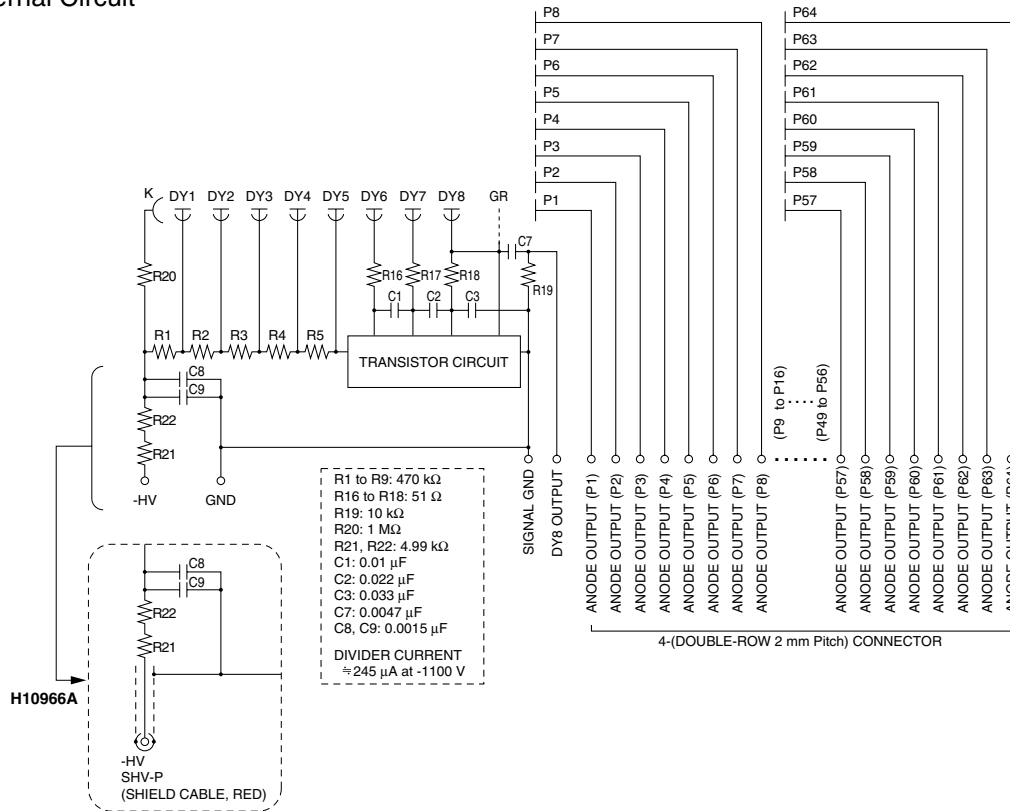

# HAMAMATSU

WEB SITE [www.hamamatsu.com](http://www.hamamatsu.com)

HAMAMATSU PHOTONICS K.K., Electron Tube Division

314-5, Shimokanzo, Iwata City, Shizuoka Pref., 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P. O. Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: [usa@hamamatsu.com](mailto:usa@hamamatsu.com)

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658 E-mail: [info@hamamatsu.de](mailto:info@hamamatsu.de)

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: [infos@hamamatsu.fr](mailto:infos@hamamatsu.fr)

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road Welwyn Garden City Hertfordshire AL7 1BW, United Kingdom, Telephone: 44-(0)1707-294888, Fax: 44(0)1707-325777 E-mail: [info@hamamatsu.co.uk](mailto:info@hamamatsu.co.uk)

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171-41 SOLNA, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01 E-mail: [info@hamamatsu.se](mailto:info@hamamatsu.se)

Italy: Hamamatsu Photonics Italia: S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741 E-mail: [info@hamamatsu.it](mailto:info@hamamatsu.it)

TPMH1319E01  
JAN. 2010 IP