


CUSO32xx Model

3.2X5 mm SMD, 5V, CMOS



Clock Oscillator




Frequency Range: 1.544MHz to 80MHz
Frequency Stability: ±25ppm to ±100ppm
Temperature Range:
 Operating: 0°C to 70°C
 (Option M) -20°C to 70°C
 (Option E) -40°C to 85°C
Storage: -55°C to 120°C
Input Voltage: 5V ± 0.5V
Input Current: <30MHz 5-30mA (freq. dependent)
 >31MHz 15-40mA (freq. dependent)
 Standby Mode: 10uA Max
Output: CMOS
 Symmetry: 40/60% Max @ 50% Vdd
 Rise/Fall Time: 3ns Typ., 6ns Max
 Logic: "0" = 10% Vdd Max
 "1" = 90% Vdd Min
 Load: 15pF Max
Jitter: 12KHz to 20MHz 0.5ps Typ, 1ps Max RMS

Designed to meet application requirements for smaller layout areas. The CUSO (Crystek Ultra Small Oscillator) Series utilizes fundamental and 3rd overtone crystal design thereby providing the proven performance of our larger 5x7mm package. Standby mode and Power-save Pull-up Resistance is standard. Packaged on tape and reel in quantities of 1K.


Aging: <3ppm 1st/yr, 1ppm every year thereafter

Dimensions inches (mm)

All dimensions are Max unless otherwise specified.

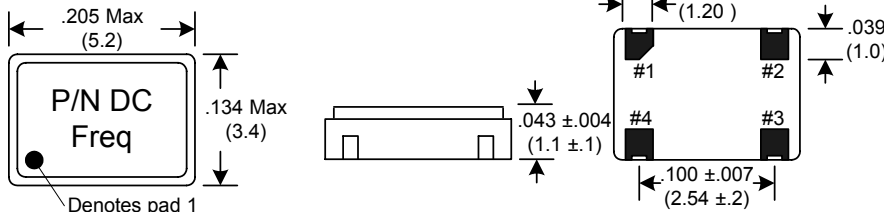


SUGGESTED PAD LAYOUT




0.01uF Bypass Capacitor Recommended

RECOMMENDED REFLOW SOLDERING PROFILE

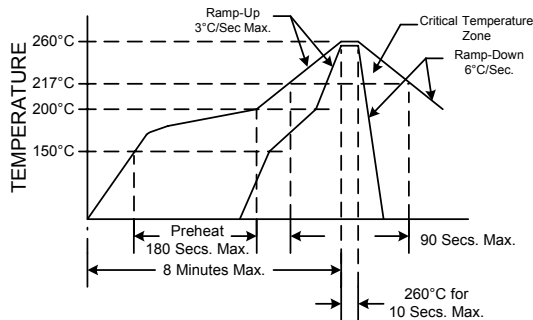

NOTE: Reflow Profile with 240°C peak also acceptable.

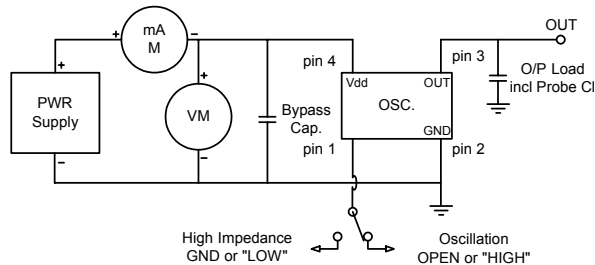

Crystek Part Number Guide

Example: CUSO3292-44.736
 Example: CUSOM3292-44.736
 Example: CUSOE3292-44.736

| Temperature | | | Frequency Stability |
|-------------|-----------|-----------|---------------------|
| 0/ 70°C | -20/ 70°C | -40/ 85°C | |
| CUSO3290 | CUSOM3290 | CUSOE3290 | +/- 100ppm |
| CUSO3292 | CUSOM3292 | CUSOE3292 | +/- 50ppm |
| CUSO3291 | CUSOM3291 | CUSOE3291 | +/- 25ppm |

Standby Function

| Function pin 1 | Output pin | Oscillator State |
|---------------------|------------|------------------|
| Open | Active | Normal Operation |
| "1" level .7Vcc Min | Active | Normal Operation |
| "0" level .3Vcc Max | High Z | Stopped |

Specifications subject to change without notice.

TD-021101 Rev. D

