




# A14

## Ordering Information

1. Series	A14	1C	C	Q	12VDC
2. Contact Arrangement	A14				
1A = SPST N.O. 1C = SPDT					
3. Sealing Option	C = Dust Cover				
4. Termination Options	Q = Quick Connect				
5. Coil Voltage	12VDC 24VDC				
6. Coil Suppression	Blank = 680Ω for 12VDC; 2700Ω for 24VDC D = Diode (1N4005) 2D = 2 Diodes (1N4005) **Consult factory if other values are needed				

## Dimensions


Units = mm

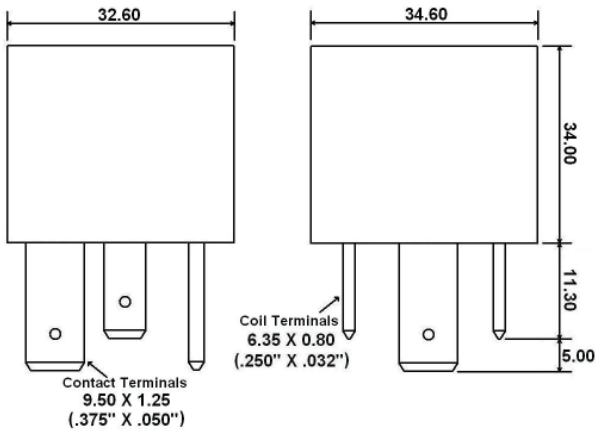


\*\* We recommend the PR Series socket from Custom Connector Corporation

## Schematics


Bottom Views



1A



1C



Dimensions shown in mm. Dimensions are shown for reference purposes only.

Specifications and availability subject to change without notice.