

8 - 18 GHz 15 dBm Amplifier

FEATURES

- P_{1dB}: 15 dBm
- Noise Figure: 4.5dB
- Small Signal Gain: 15 dB
- Bias Condition: 180 mA @ 12 V



ELECTRICAL SPECIFICATIONS

SYMBOL	DESCRIPTION	MIN	TYP	MAX	UNITS
FREQ	Frequency Range	8		18	GHz
SSG	Small Signal Gain @ 25°C	15	17		dB
GOF	Small Signal Gain Flatness @ 25°C		±1.0	±1.25	dB
P_{1dB}	Output Power at 1 dB Gain Compression @ 25°C	15	17		dBm
IP3	Third Order Intercept Point @ 25°C	25	27		dBm
NF	Noise Figure @ 25°C		4.0	4.5	dB
2nd	Second Harmonic @ 25°C, P1dB	30			dBc
VSWR, IN	Input VSWR @ 25°C			2:1	-----
VSWR, OUT	Output VSWR @ 25°C			2:1	-----
Vdc	DC Supply Voltage		12		Volt
Idc	Current Supply (Small Signal Gain) @ 25°C		180	210	mA
OTR	Operating Temperature Range	-30		70	°C

CASE:HG4

DWG NO. DOC-907000-1 SH 2

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

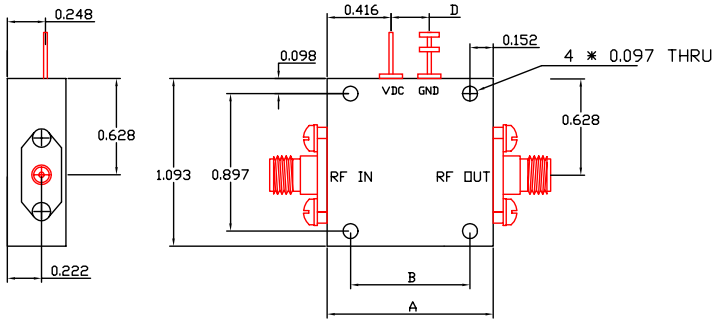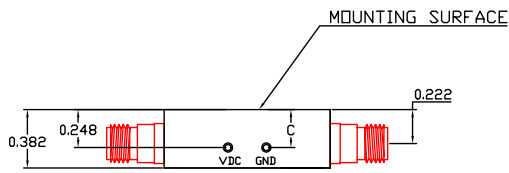

DIM CASE	A	B	C	D
HG2	0.841	0.537	0.080	0.13
HG3	1.083	0.779	0.248	0.25
HG4	1.333	1.029	0.248	0.25
HG5	1.583	1.279	0.248	0.25
HG6	1.833	1.529	0.248	0.25

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES
DECIMALS ANGULAR
.XX ± .01 ±
.XXX ± .005 ±
FINISH 3/8
DO NOT SCALE DRAWING

CONTRACT NO.
DRAWN 宋崇熙 DATE 05/23/2005
CHECK 张景华 05/23/2005
PROJ ENGR
MFG ENGR



TRANSCOM, INC.

TITLE HOUSING OUTLINE
HG

UNLESS OTHERWISE SPECIFIED BY CONTRACT THESE DIMENSIONS AND SPECIFICATIONS AND DATA DISCLOSED HEREIN ARE THE PROPERTY OF TRANSCOM, INC. ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR DISCLOSED IN WHOLE OR PART OR USED AS THE BASIS FOR MANUFACTURE OR SALE WITHOUT THE PERMISSION OF TRANSCOM.

MATERIAL
ALUMINUM

SIZE B FSCM NO. DWG NO. DOC-907000-1 REV 2
SCALE WEIGHT SHEET 1 OF 1