

VI TELEFILTER**Filter Specification****TFS 210G****1/5****Measurement condition**

Ambient temperature T_A : 23 °C
 Input power level: 0 dBm
 Terminating impedances at f_C *):
 input: 860 Ω // -6,4 pF
 output: 1,16 k Ω // -6,7 pF

Characteristics

Remark: Reference level for the relative attenuation a_{rel} of the **TFS 210G** is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The centre frequency f_C is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e . The temperature coefficient of frequency T_C is valid for both the reference frequency f_C and the frequency response of the filter in the operating temperature range.

Data	typ. value	tolerance / limit
Insertion Loss (Reference level)	a_e 8,3 dB	max. 11 dB**
Centre Frequency at ambient temperature	f_C 210,816 MHz	\pm 50 kHz
Pass Band	PB	$f_C \pm$ 0,8 MHz
Relative Attenuation	a_{rel}	
f_C $f_C \pm$ 475 kHz	-	max. 3 dB
$f_C \pm$ 475 kHz $f_C \pm$ 815 kHz	-	max. 10 dB
$f_C \pm$ 1,175 MHz $f_C \pm$ 1,3 MHz	-	min. 20 dB
$f_C \pm$ 1,3 MHz $f_C \pm$ 1,475 MHz	-	min. 30 dB
$f_C \pm$ 1,475 MHz $f_C \pm$ 2,0 MHz	43 dB	min. 40 dB
$f_C -$ 2,0 MHz $f_C -$ 5,0 MHz	48 dB	min. 45 dB
$f_C +$ 2,0 MHz $f_C +$ 5,0 MHz	46 dB	min. 42 dB
$f_C \pm$ 5,0 MHz $f_C \pm$ 10,0 MHz	52 dB	min. 40 dB
Group Delay Ripple in PB	240 ns	max. 300 ns
Average Group Delay in PB	0,88 μ s	max. 1,3 μ s
Operating Temperature Range		- 10 °C ... + 55 °C
Storage Temperature Range		- 40 °C ... + 85 °C
Turnover temperature T_0	15 °C	
Temperature Coefficient of frequency TC_f ***	- 0,036 ppm / K ²	-

*) The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions, do not hesitate to ask for an application note or contact our design team.

***) q-values of matching inductors: q=40

***) $\Delta f(\text{Hz}) = TC_f(\text{ppm/K}^2) \times (T - T_0)^2 \times f_{T_0}(\text{MHz})$

generated:

checked / approved:

VI TELEFILTER

Potsdamer Straße 18


D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

E-Mail: tf@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Package

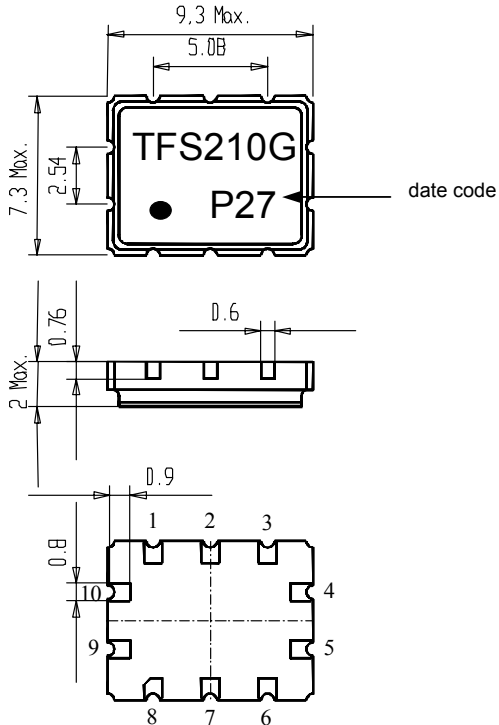

1	input
2	input rf return
3	ground
4	ground
5	ground
6	output
7	output rf return
8	ground
9	ground
10	ground


date code: year + week

M 2000

N 2001

P 2002

.....

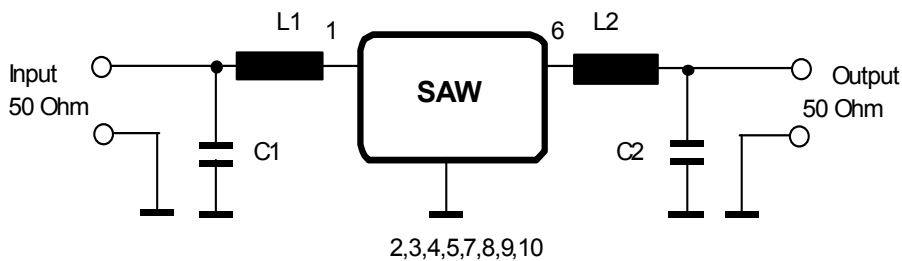50 Ω matching network :

VI TELEFILTER

Potsdamer Straße 18

D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

E-Mail: tf@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Stability Characteristics

After the following tests the filter shall meet the whole specification:

- Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
- Vibration: 10 Hz to 500 Hz, 0,35 mm or 5g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
- Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles
DIN IEC 68 part 2 – 14 Test N
- Resistance to solder heat (reflow): reflow possible: twice max.;
for temperature conditions, please refer to the attached "Air reflow temperature conditions" on page 4;

Packing


Tape & Reel: DIN IEC 286 – 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;

max. pieces of filters per reel:
reel of empty components at start:
reel of empty components at start including leader:
trailer

2000
min 300 mm
min 500 mm
min 300 mm


Tape (all dimensions in mm)

W	: 16 ± 0,3
Po	: 4 ± 0,1
Do	: 1,5 + 0,5
E	: 1,75 ± 0,1
F	: 7,5 ± 0,1
G (min)	: 0,75
P2	: 2 ± 0,1
P1	: 12 ± 0,1
D1(min)	: 1,5
Ao	: 7,6 ± 0,1
Bo	: 9,6 ± 0,1
CT	: 13,5 ± 0,1

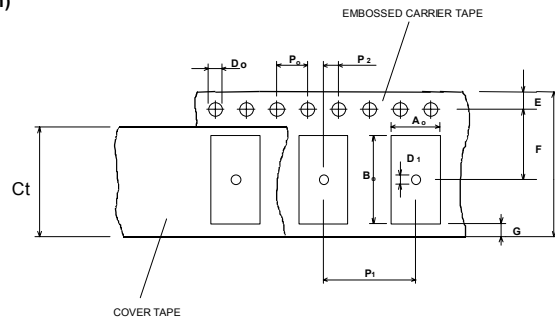

Reel (all dimensions in mm):

A	: 330
W1	: 16,4 +2
W2 (max)	: 22,4
N (min)	: 60
C	: 12,8 ± 0,1

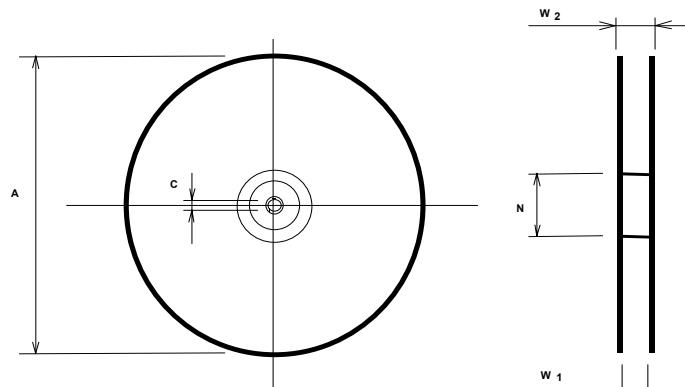

The minimum bending radius is 45 mm. The mounting surface of the filters faces the bottom side of the embossed carrier tape. Markings on the filters can be read if the upper side of the carrier tape is regarded with the sprocket holes on its right.

VI TELEFILTER

Potsdamer Straße 18

D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Air reflow temperature conditions

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

Air reflow profile

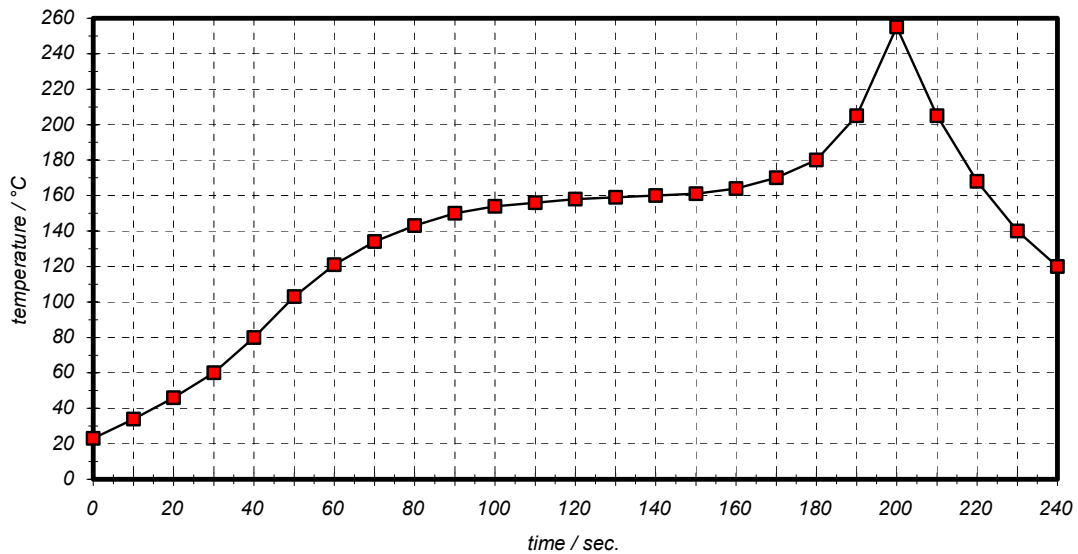


Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

VI TELEFILTER

Potsdamer Straße 18

D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

E-Mail: tf@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER**Filter Specification****TFS 210G****5/5****History**

Version	Reason of Changes	Name	Date
1.0	generate specification according to customer requirements	Pfeiffer	22.02.2002
1.1	changing package changing relative attenuation, operating temperature range	Pfeiffer	11.03.2002
1.2	changing insertion loss	Pfeiffer	18.03.2002
1.3	terminating impedance (preliminary values) and typical values added	Pfeiffer	17.06.2002
1.4	terminating impedance changed changing relative attenuation ($f_c + 2,0\text{MHz}$ $f_c + 5,0\text{MHz}$)	Pfeiffer	03.07.2002

VI TELEFILTER**Potsdamer Straße 18****D 14 513 TELTOW / Germany****Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30****E-Mail: tf@telefilter.com**

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.