

## Product Features

- Solid-state linear design
- Small and light weight
- Suitable for US-PCS
- 50 Ohm Input/Output impedance
- High reliability and ruggedness
- Built in Output Isolator
- Built in monitoring circuit
- High efficiency

## Application

- US-PCS Repeater



## Description

This HPA Module is a high gain, wide dynamic range amplifier module. It has superior performance comes with a modest price tag. Custom design available.


## Electrical Specifications @ VDD=+27DC, T=25°C, 50Ω System

PARAMETER	Symbol	Specification	
Frequency Range	BW	1930 ~ 1995MHz	
Operating Bandwidth	OBW	65MHz	
Output Power	P	32dBm @ CDMA 7FA	
Gain	G	37dB ±1dB (min)	
Gain Flatness	ΔG	1.0dB (peak to peak)	
Gain Variation	ΔG <sub>TEMP</sub>	±1.0dB (max)	
Spurious Emission @ CDMA 7FA 32dBm	SE	Fc±885KHz @ 30KHz RBW	-45dBc
		Fc±1.98MHz @ 30KHz RBW	-48dBc
Input/Output VSWR	S11/S22	1.5 :1 (max) to 50Ω	
Output Power Detector	DET	4.2V±0.1V @ CDMA 7FA 32dBm (100mV/1dB) Detect range : 2dBm ~ 32dBm	
Over Power Alarm	OPA	35dBm±0.5dBm, TTL High Alarm	
VSWR Alarm	VSWR	S22 > 3 :1, TTL High Alarm	
Over Temperature Alarm	OTA	Temp > 90°C, TTL High Alarm	
		85°C±5°C, Alarm Clear	
DC Input Voltage	VDC	+27V DC	
DC Input Current	IDD	Typ. 1.0A, MAX 1.3A (@ Vdc= +27V, @ CDMA 7FA 32dBm)	
Operating Temperature	To	-20 ~ +60°C	
Storage Temperature	Ts	-40 ~ +85°C	
Dimension		104 x 130 x 25(mm)	
RF Connector		SMA Female	



## Interface Connectors D-Sub, 9-Pin-Control

Pin #	DESCRIPTION	Specifications
1	RF Power Monitor	4.2V±0.1V @ CDMA 7FA 32dBm, (100mV / 1dB), Detect range : 2dBm ~ 32dBm
2	VSWR Alarm	1.3 :1 (max) to 50Ω
3	Over Power Alarm	TTL High @ 35dBm±0.5dBm
4	RF Power Enable	Enable : TTL Low or GND / Disable : TTL High or Open
5	Over Temperature Alarm	+90℃
6	+VCC	GND
7	+VCC	GND
8	GND	+27V
9	GND	+27V


## OUTLINE DRAWING

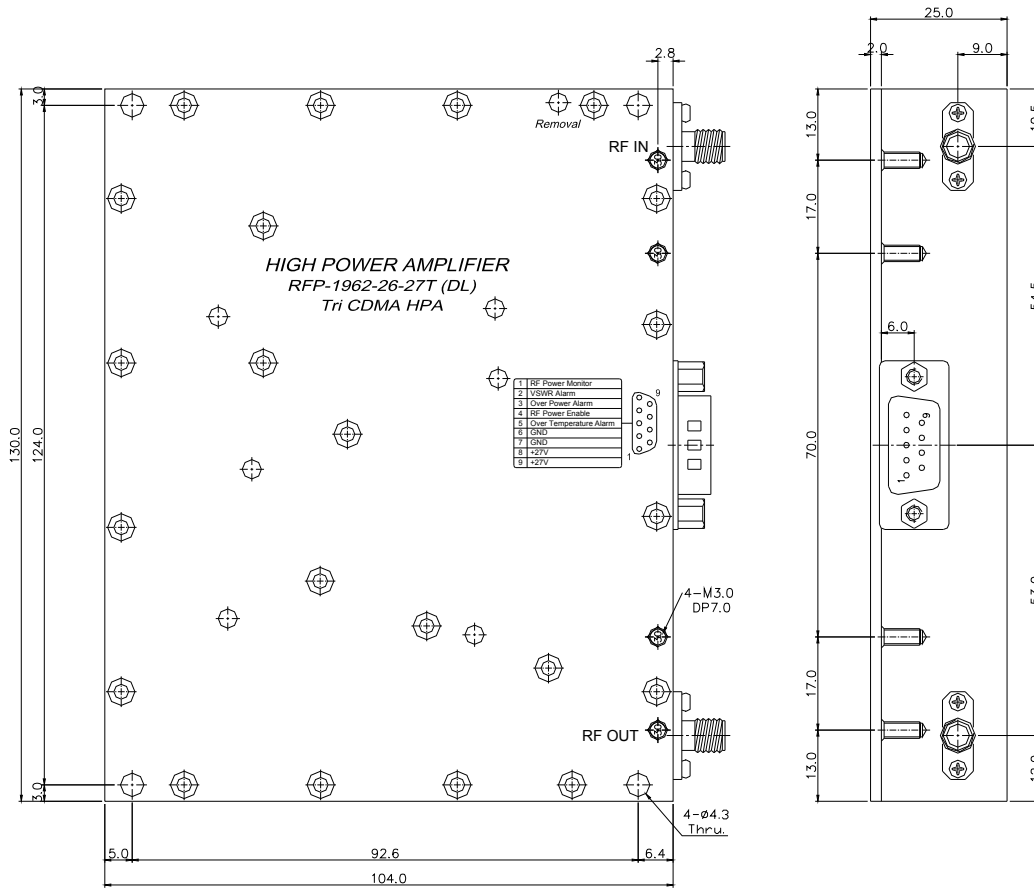


## TYPICAL PERFORMANCE

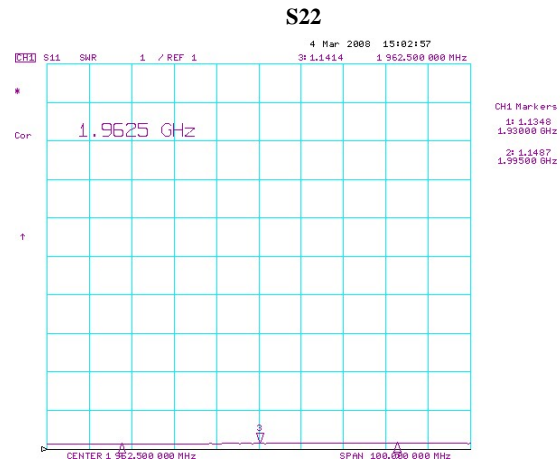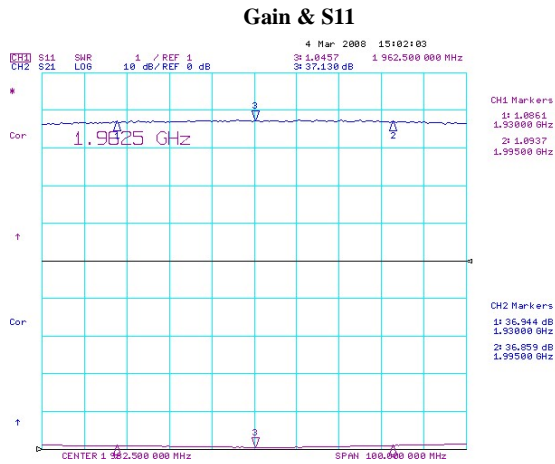


### Spurious Emission @ Fc 1932.5MHz, CDMA 7FA, 32dBm

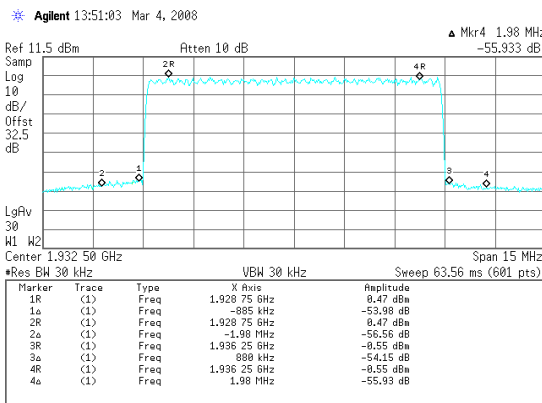

### Spurious Emission @ Fc 1962.5MHz, CDMA 7FA, 32dBm

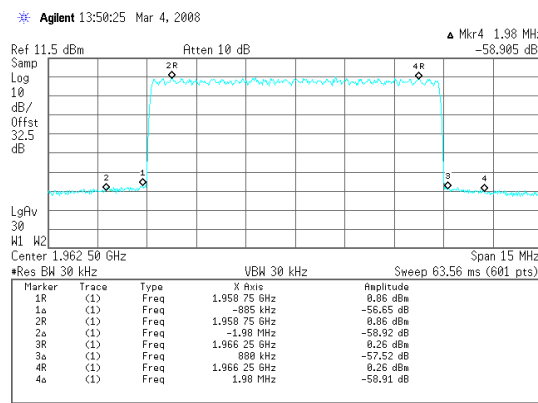

### Spurious Emission @ Fc 1992.5MHz, CDMA 7FA, 32dBm

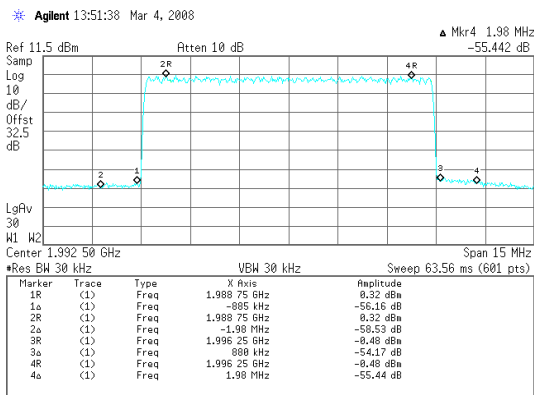

RFHIC Corporation (RFHIC) reserves the right to make changes to any products herein or to discontinue any product at any time without notice. RFHIC do not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. The product specifications herein expressed have been carefully checked and are assumed to be reliable. However, RFHIC disclaims liability for inaccuracies and strongly recommends buyers to verify that the information they are using is current before placing purchase orders. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such use. RFHIC's liability under or arising out of damages, claims of whatsoever kind and nature which RFHIC products could cause shall be limited in amount to the net purchase price of the products sold to buyer by RFHIC.

- Tel : 82-31-250-5011
- rfsales@rfhic.com

- All specifications may change without notice.
- Version 1.0