

Inline Fuseholder, 5x20 / 6.3x32 mm

new



5x20 mm with wire leads, 8601.2001.08

5x20 mm, 8601.2000

6.3x32 mm, 8601.2005

32 VAC · 2.5W/6.3A · 32VDC



**Description**

- Inline Fuseholder

**Applications**

- Automotive applications/aftermarket
- Audio aftermarket
- Lighting aftermarket

**References**

[General Product Information](#)



**Weblinks**

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [Distributor-Stock-Check](#), [Accessories](#), [Product Change Notification \(PCN\)](#)

**Technical Data**

Shocksafe Category	PC2
Fuse-Link	5 x 20 or 6.3 x 32mm
Mounting	In-line
Terminal	Wires
Rated Voltage	32VAC , 32VDC
Rated Current	6.3A
Rated Power Acceptance IEC	2.5W / 6.3A @ Ta 23°C
Degree of Protection	IP 40
Admissible Ambient Air Temp.	-40°C to +85°C
Material: Socket	Thermoplastic, UL 94V-0
Material: Terminals	Tin-Plated Brass
Storage Conditions	0°C to 60°C, max. 70% r.h.


**Abmessungen**

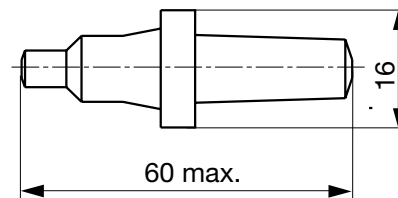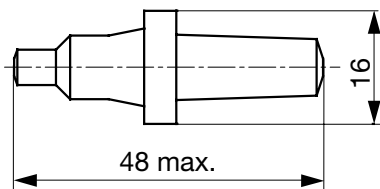

5x20 mm

6.3x32 mm

**Mounting Instruction**

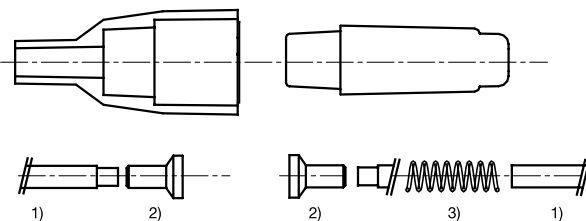

**Variants**

Holder	Fuse-Link	Wire	Colour Wire	Length [mm]	Order Number
●	5 x 20mm	-	-	-	8601.2000
●	5 x 20mm	18 AWG	dark pink	200	8601.2001.08
●	6.3 x 32mm	-	-	-	8601.2005
●	6.3 x 32mm	14 AWG	pink	200	8601.2005.08

Wire Length: 8"

**Packaging Unit**

Bulk (50 pcs.)