
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT	WIRE SIZE	DIMENSIONS in.						
PART NUMBER		±.03 A	±.01 B DIA.	±.01 C DIA.	±.03			
BSN22	26-22	.79 (20.1)	.08 (2.0)	.04 (1.0)	.47 (1.2)			



NOTES:

- 1. RATED FOR:
 A. #26-22 AWG SOLID OR STRANDED COPPER WIRE
 - B. 221° F (105° C) MAX. TEMP. RATING
- 2. MATERIAL:
 A. .02 (0.5) THK COPPER,
 TIN PLATED
 - B. HOUSING NYLON, YELLOW
- 3. PACKAGE QTY: STD. PKG.-C=100 BULK PKG.-M=1000
- 4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- 5. INSTALLATION TOOLS: CT-520
- 6. WIRE STRIP LENGTH: 1/4 +1/32 -0

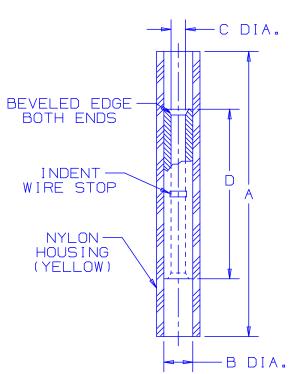

A41337_04

04	10/05	RT	LA	REMOVED UL & CSA NOTE	TR00036		CORP. TINLEY PARK, ILLINOIS			
03	1/01	RM		FILESPEC WAS N41337AA_PCD_02			#26-22 BARREL NYLON INSULATED			
02	7/95	МС		UPDATED NOTES AND DIMENSIONS	03438		BUTT SPLICE			
REV	DATE	BY	СНК	DESCRIPTION	ECN #		DRAWN BY	CHK*D	SCALE N/A	DRAWING NO. A41337