

Features

Unregulated Converters

- 1kVDC Isolation
- Internal SMD Construction
- UL94V-O Package Material
- Power Density 1.8W/cm³
- Optional Continuous Short Circuit Protected
- Efficiency to 85%

Selection Guide

Part Number	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (%)
RSS**-xx1.8 (H)	1.8, 3.3, 5, 9, 12, 15, 24	1.8	555	70
RSS**-xx3.3 (H)	1.8, 3.3, 5, 9, 12, 15, 24	3.3	303	75
RSS**-xx05 (H)	1.8, 3.3, 5, 9, 12, 15, 24	5	200	70-78
RSS**-xx09 (H)	1.8, 3.3, 5, 9, 12, 15, 24	9	111	76-78
RSS**-xx12 (H)	1.8, 3.3, 5, 9, 12, 15, 24	12	84	78-80
RSS**-xx15 (H)	1.8, 3.3, 5, 9, 12, 15, 24	15	66	80-84
RSS**-xx24 (H)	1.8, 3.3, 5, 9, 12, 15, 24	24	42	74-85
RSD**-xx1.8 (H)	1.8, 3.3, 5, 9, 12, 15, 24	±1.8	±278	70
RSD**-xx3.3 (H)	1.8, 3.3, 5, 9, 12, 15, 24	±3.3	±152	70
RSD**-xx05 (H)	1.8, 3.3, 5, 9, 12, 15, 24	±5	±100	74-78
RSD**-xx09 (H)	1.8, 3.3, 5, 9, 12, 15, 24	±9	±56	76-80
RSD**-xx12 (H)	1.8, 3.3, 5, 9, 12, 15, 24	±12	±42	78-82
RSD**-xx15 (H)	1.8, 3.3, 5, 9, 12, 15, 24	±15	±33	78-82
RSD**-xx24 (H)	1.8, 3.3, 5, 9, 12, 15, 24	±24	±21	80-84

RSS** : ** without marking denotes standard pinning
 ** with marking **8** denotes with eight pins
 RSD** : ** without marking denotes standard pinning
 ** with marking **10** denotes with ten pins

* add Suffix "P" for Continuous Short Circuit Protection, e.g. RSS-051.8/P, RSS-051.8/HP

Specifications (Core Operating Area)

Input Voltage Range		±10%
Output Voltage Accuracy		±5%
Line Voltage Regulation		1.2%/1% of Vin typ.
Load Voltage Regulation (10% to 100% full load)	1.8V, 3.3V output types 5V output type 9V, 12V, 15V, 24V output types	20% max. 15% max. 10% max.
Output Ripple and Noise (20MHz limited)		100mVp-p max.
Operating Frequency		50kHz min. / 100kHz typ. / 105kHz max.
Efficiency at Full Load		70% min. / 80% typ.
No Load Power Consumption	RSS & RSS8 types RSD & RSD10 types	101mW min. / 126mW typ. / 220mW max. 87mW min. / 130mW typ. / 230mW max.
Isolation Voltage	(tested for 1 second)	1000VDC min. 3000VDC min.
Rated Working Voltage	H-Suffix (tested for 1 second) (long term isolation)	see Application Notes
Isolation Capacitance		15pF min. / 70pF max.
Isolation Resistance		10 GΩ min.
Short Circuit Protection		1 Second
P-Suffix		Continuous
Operating Temperature Range (free air convection)		-40°C to +85°C (see Graph)
Storage Temperature Range		-55°C to +125°C
Reflow Temperature	ROHS compliant (for more details see Application Notes)	245°C (30 sec) max.
Relative Humidity		95% RH

continued on next page

ECONOLINE

DC/DC-Converter

RSS** & RSD** Series

1 Watt

SMD


Single & Dual Output



EN-60950-1 Certified
 EN-60601-1 Certified (suffix H)

RECOM

Derating-Graph (Ambient Temperature)


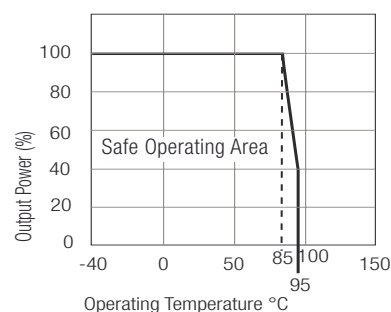


Specifications (Core Operating Area)



Package Weight	RSS & RSS8 types	1.5g
	RSD & RSD10 types	2.2g
MTBF (+25°C)	Detailed Information see Application Notes chapter "MTBF" using MIL-HDBK 217F	1045 x 10 ³ hours
(+85°C)		183 x 10 ³ hours

Typical Characteristics



RSS-xx05**

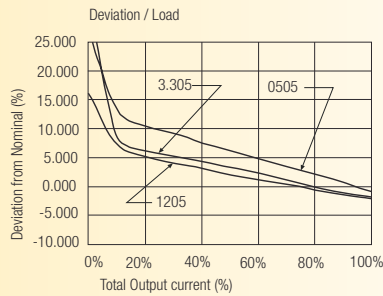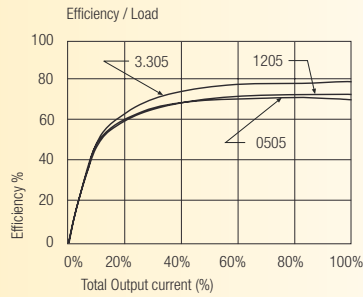



RSS-xx09**

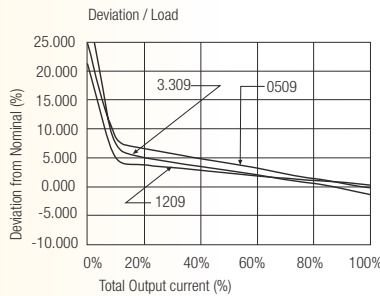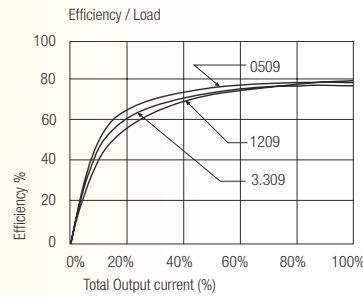

RSS-xx12**

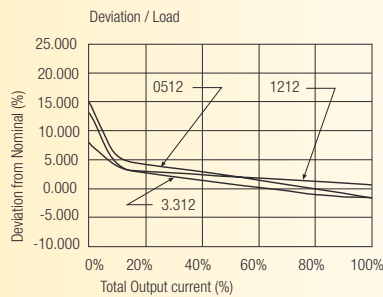
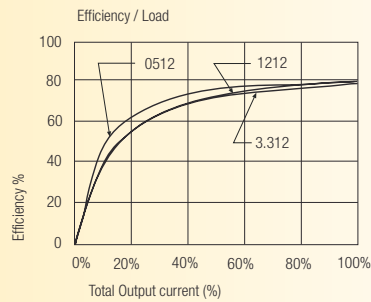


RSS-xx15**

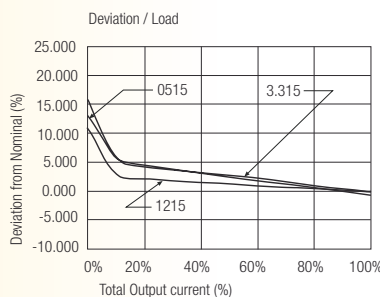
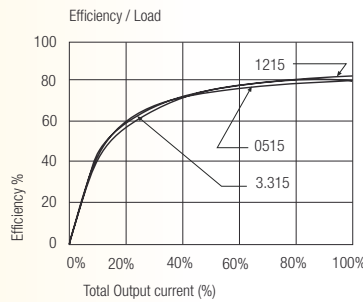


Typical Characteristics



RSD-xx05**

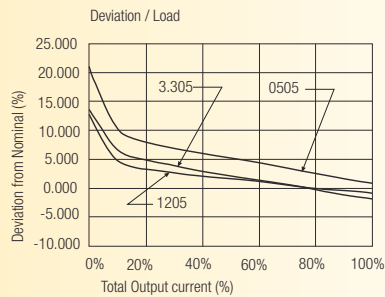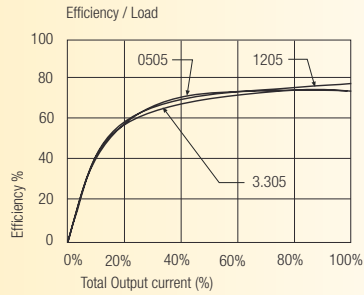



RSD-xx09**

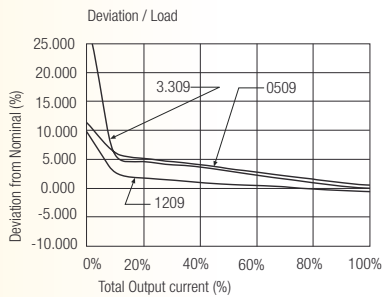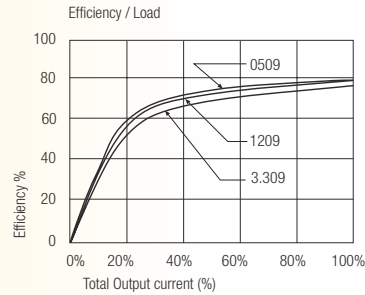

RSD-xx12**

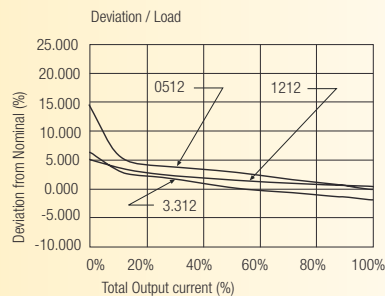
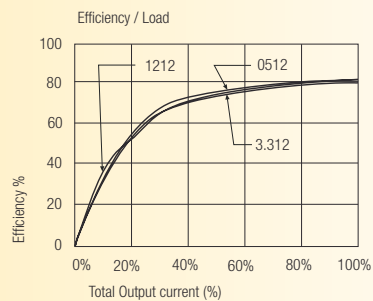


RSD-xx15**

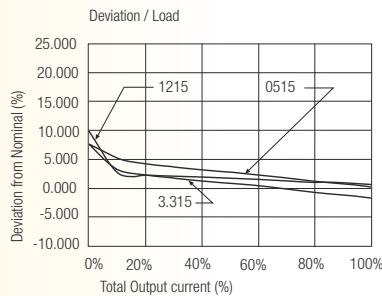
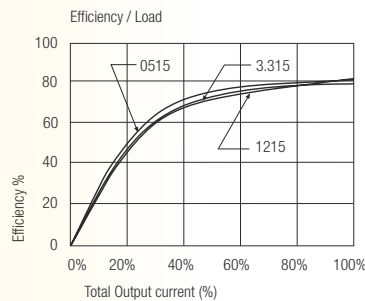


Package Style and Pinning (mm)


8 PIN Single SMD Package



10 PIN Dual SMD Package

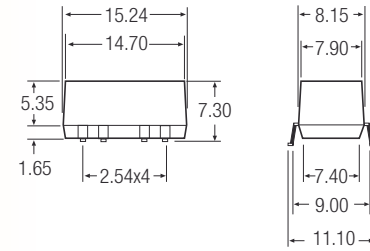

Recommended Footprint Details

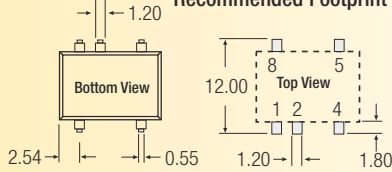


Pin Connections

Pin #	Single	Dual
1	-Vin	-Vin
2	+Vin	+Vin
4	-Vout	Com
5	+Vout	-Vout
7	No Pin	+Vout
8	NC	No Pin
10	No Pin	NC



NC = No Connection
XX.X ± 0.5 mm
XX.XX ± 0.25 mm

Recommended Footprint Details


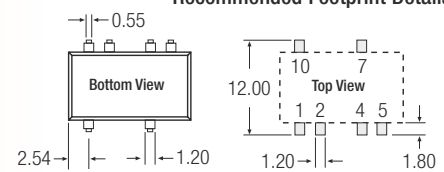


**** Package Style and Pinning (mm)**

8 PIN Single SMD Package



10 PIN Dual SMD Package

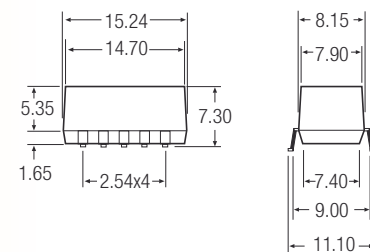

Pin Connections

Pin #	Single	Dual
1	-Vin	-Vin
2	+Vin	+Vin
3	NC	NC
4	-Vout	Com
5	+Vout	-Vout
6	NC	NC
7	NC	+Vout
8	NC	NC
9	-	NC
10	-	NC

NC = No Connection
XX.X ± 0.5 mm
XX.XX ± 0.25 mm

Recommended Footprint Details

