




Products for tomorrow...

Headquarter Europe  
 MEDER electronic AG  
 Friedrich-List Strasse 6  
 D-78234 Engen-Welschingen  
 Tel.: +49(0)7733-9487-0  
 Fax: +49(0)7733-9487-32  
 eMail: [info@meder.com](mailto:info@meder.com)  
 Internet: [www.meder.com](http://www.meder.com)

Headquarter USA  
 MEDER electronic Inc.  
 766 Falmouth Rd  
 Mashpee, MA 02649  
 Phone: +1/ 508-539-0002  
 Fax: +1/ 508-539-4088  
 eMail: [salesusa@meder.com](mailto:salesusa@meder.com)

Reed Relay: SIL05-1B72-71L

Part Number: 3305072071

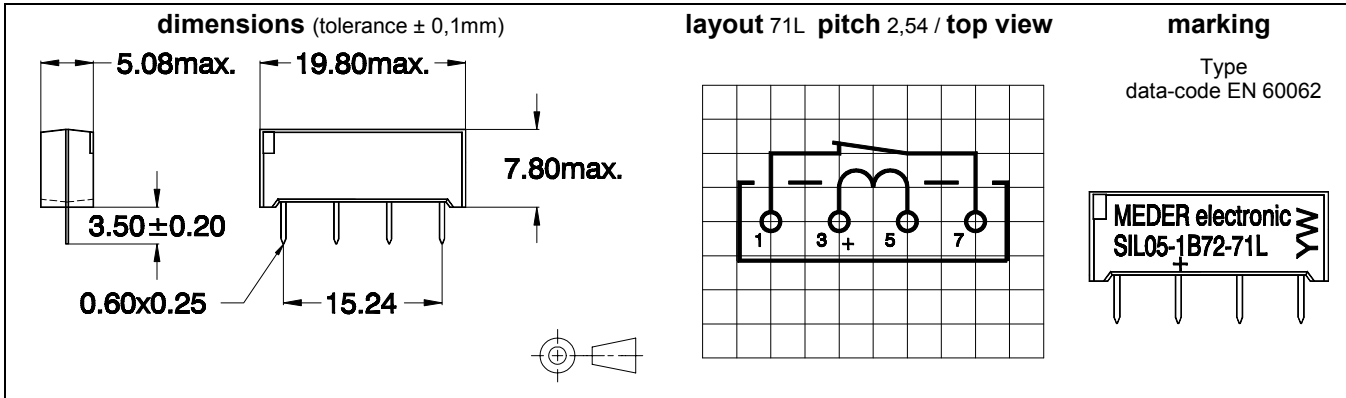

coil data	condition	Min.	Typ.	Max.	unit
coil resistance	at 20°C	450	500	550	Ω
nominal voltage			5,0		VDC
pull-in voltage				3,5	VDC
drop-out voltage		0,75			VDC
return voltage		6,5			VDC
nominal power	determined with nominal voltage and rated current		50		mW

contact data 72 (Form B/Dry)		Ruthenium			
contact material		Ruthenium			
rated power	each combination of the switching voltage and current must not exceed the given rated power			15	W
switching voltage				200	VDC
switching current				1,0	A
carry current				1,25	A
static contact resistance	initial values measured with 1,4 x AT <sub>pull-in</sub>			150	mΩ
Insulation resistance	RH Ω 45%	10 <sup>10</sup>			Ω
breakdown voltage		250			VDC
capacitance	without test coil			0,3	pF

relay data					
insulation resistance coil-contact		10 <sup>11</sup>			Ω
insulation voltage coil-contact		1,5			kVDC
shock	½ sine wave, duration 11ms			150	g
vibration	50 – 2000Hz			10	g
operate time inclusive bounce	measured at 1,4 x AT <sub>pull-in</sub>		0,5		ms
release time			0,1		ms

general data					
operating temperature		-20		70	°C
storing temperature		-35		95	°C
soldering temperature	10 sec. at			260	°C
cleaning		fully sealed			
material of case		mineral-filled epoxy			
material of pins		FeNi-alloy tinned			