


FEATURES

- Medical Application
- Low Cost, High Reliability
- Compact Size, Light Weight
- 100% Full Load Burn-In Test
- Universal AC Input/ Full Range
- UL2601-1, EN60601-1 Approved
- Built-In EMI Filter, Low Ripple Noise
- High Efficiency, Low Working Temperature
- Short Circuit, Overload, and Over Voltage Protected

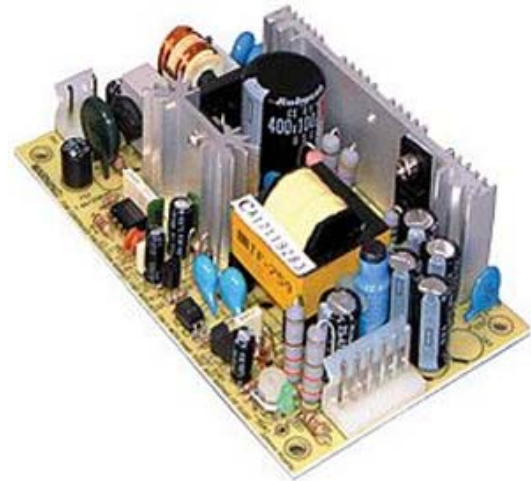

SPECIFICATIONS: PSMPT45 Series

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
We reserve the right to change specifications based on technological advances.

INPUT SPECIFICATIONS

| | |
|----------------------|--|
| Input Voltage | 90 – 264VAC (127 – 370VDC) |
| Input Frequency | 47 to 440Hz |
| AC Current (typical) | 1.2A @ 115VAC / 0.7A @ 230VAC |
| Inrush Current | 20A @ 115VAC cold start / 40A @ 230VAC cold start. |
| Leakage Current | Less than 0.3mA @ 264VAC |

OUTPUT SPECIFICATIONS

| | |
|--------------------------|---|
| Output Voltage | See Table |
| Output Voltage Tolerance | ±4.0% (CH.1), ±7.0% (CH.2), ±5% (CH.3) |
| Output Adjustment Range | CH1: ±10% rated output voltage. |
| Output Power (max) | 52 Watts with 18CFM forced air flow. |
| Line Regulation | ±1% (CH.1 & CH.3), ±2% (CH.2) |
| Load Regulation | ±3% (CH.1), ±4% (CH.2), ±1% (CH.3) |
| Output Current | See Table |
| Ripple & Noise | See table |
| Setup, Rise Time | 800ms and 20ms at full load and 230VAC, 800ms and 20ms at full load and 15VAC |
| Hold-Up Time | 80ms at full load and 230VAC, 12ms at full load and 115VAC |
| Temperature Coefficient | ±0.04%/°C (0~50°C) on +5V output. |

PROTECTION

| | |
|-------------------------|--------------------------------------|
| Over Voltage Protection | CH.1: 115~135% rated output voltage. |
| Overload Protection | 53~75W hiccup mode, auto-recovery. |

GENERAL SPECIFICATIONS

| | |
|--|--------------------|
| Switching Frequency (fixed) | 45KHz |
| Efficiency | Up to 75% |
| Isolation Voltage (Input to Output) | 4000VAC for 1 min. |
| Isolation Voltage (Input to FG) | 1500VAC for 1min. |
| Isolation Voltage (Output to FG) | 500VAC for 1 min. |
| Isolation Resistance (Input to Output) | 500VDC / 100MΩ |

ENVIRONMENTAL SPECIFICATIONS

| | |
|-------------------------------------|--|
| Operating Temperature | -10°C to +60°C (refer to derating curve) |
| Storage Temperature | -20°C to +85°C |
| Operating Humidity (non-condensing) | 20% ~ 90% RH |
| Storage Humidity (non-condensing) | 10% ~ 95% RH |
| Vibration | 10~500Hz, 2G 10min./1cycle, Period for 60 minutes each along X, Y, and Z axes. |
| MTBF | 271,500 hours min. MIL-HDBK-217 (25°C) |

PHYSICAL SPECIFICATIONS

| | |
|------------|------------------------------------|
| Weight | 230g |
| Dimensions | 127(L) x 76(W) x 28(H) mm PCB only |

SAFETY & EMC

| | |
|------------------|---|
| Agency Approvals | UL/ CUL/ TUV/ CB/ CE |
| Safety Standards | UL2601-1, TUV EN60601-1, IEC601-1 Approved |
| EMC Standards | EN55011 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, EN60601-1-2, ENV50204 |


OUTPUT VOLTAGE / CURRENT RATING CHART

| Model | | Input Voltage | Output Voltage | Output Current Range | Output Current | Ripple & Noise | Output Power |
|-----------------|-----------|-----------------------------|----------------|----------------------|----------------|----------------|--------------|
| PSMPT45A | Channel 1 | 90~264 VAC (127~370 VDC) | 5 VDC | 0.4 - 5A | 3A | 60mVp-p | 40.5W |
| | Channel 2 | | 12 VDC | 0.2 - 2.5A | 2A | 120mVp-p | |
| | Channel 3 | | -5 VDC | 0 - 0.5A | 0.3A | 60mVp-p | |
| PSMPT45B | Channel 1 | | 5 VDC | 0.4 - 5A | 3A | 60mVp-p | 42.6W |
| | Channel 2 | | 12 VDC | 0.2 - 2.5A | 2A | 120mVp-p | |
| | Channel 3 | | -12 VDC | 0 - 0.5A | 0.3A | 100mVp-p | |
| PSMPT45C | Channel 1 | | 5 VDC | 0.4 - 5A | 3A | 60mVp-p | 43.5W |
| | Channel 2 | | 15 VDC | 0.2 - 2.3A | 1.6A | 120mVp-p | |
| | Channel 3 | | -15 VDC | 0 - 0.5A | 0.3A | 100mVp-p | |


NOTES

1. All parameters are specified at 230VAC input, rated load, 25°C ambient.
2. Tolerances include set up tolerance, line regulation, load regulation.
3. Line regulation is measured from low line to high line at rated load.
4. Mounting holes M1 and M2 should be grounded for EMI purposes.
5. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uF & 47uF capacitor.


BLOCK DIAGRAM

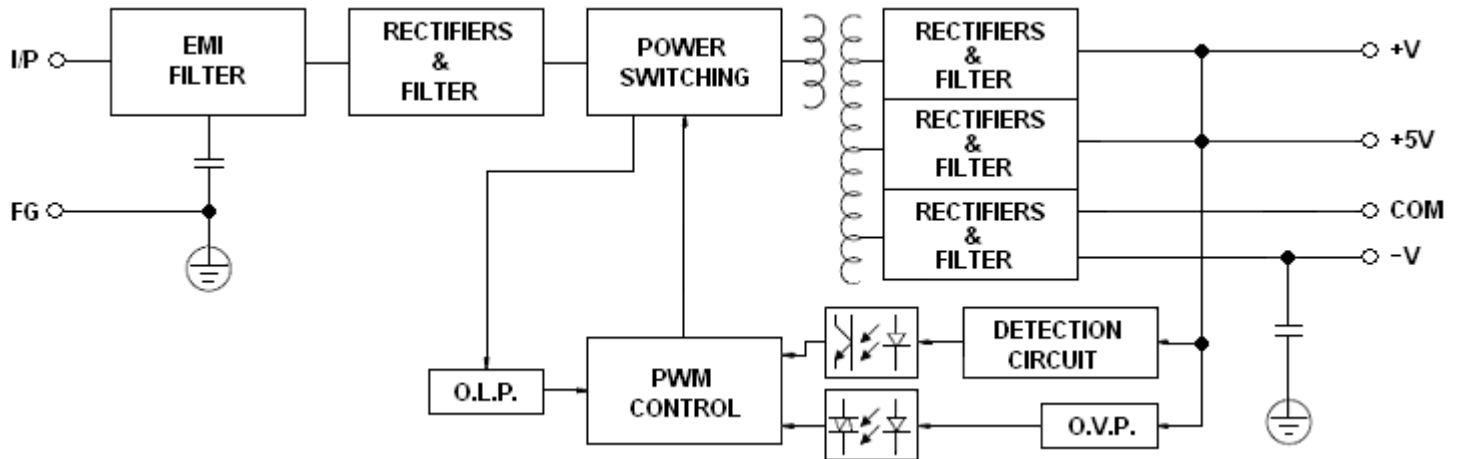

DERATING CURVE

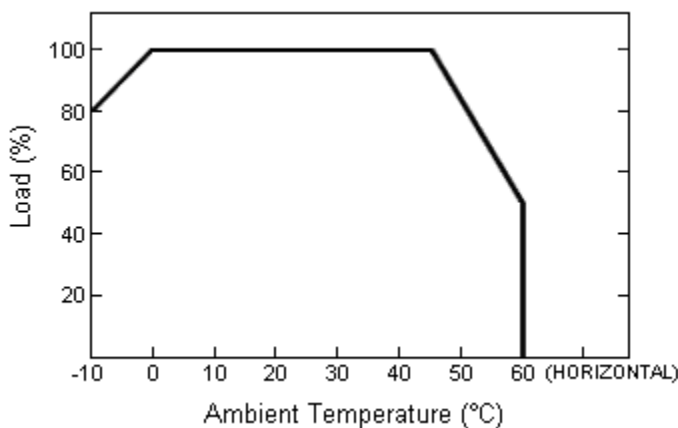


STATIC CHARACTERISTICS

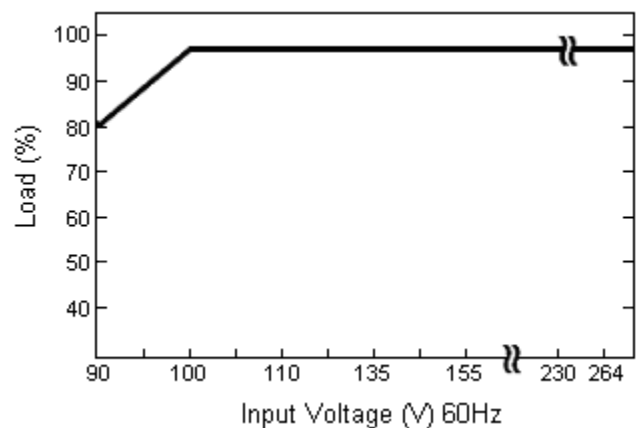

MECHANICAL DRAWING

Unit: mm (inches)

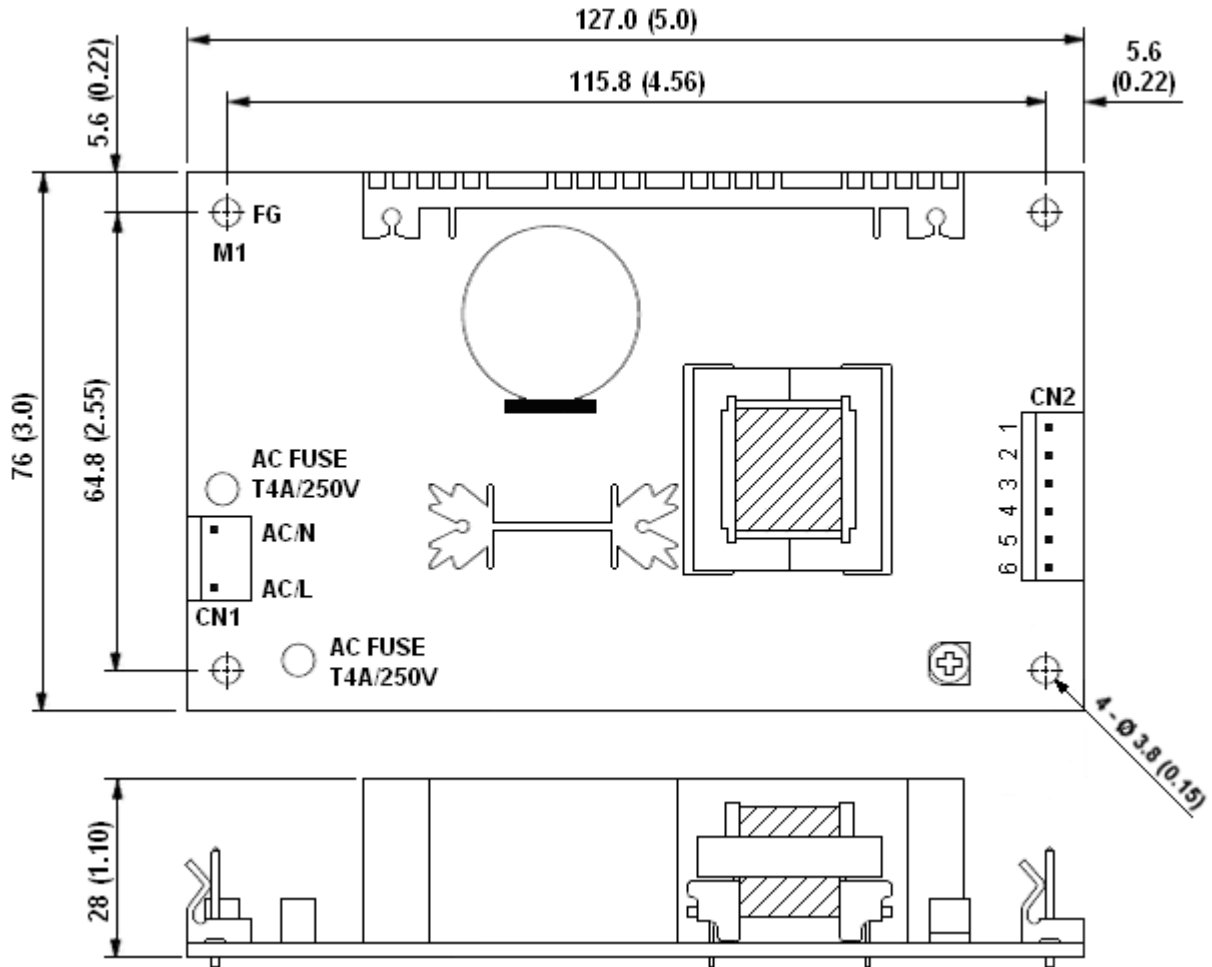

AC Input Connector (CN1): Molex 5277-02 or equivalent

| Pin. No | Assignment | Mating Housing | Terminal |
|---------|------------|-----------------------------|-----------------------------|
| 1 | AC/N | Molex 5195 or equivalent | Molex 5194 or equivalent |
| 2 | AC/L | | |

DC Output Connector (CN2): Molex 5273-06 or equivalent

| Pin No. | Assignment | Mating Housing | Terminal |
|---------|------------|-----------------------------|-----------------------------|
| 1 | +V | Molex 5195 or equivalent | Molex 5194 or equivalent |
| 2,3 | +5V | | |
| 4,5 | COM | | |
| 6 | -V | | |