

4.2" x 2.6" x 1.2"

- Universal 85-265VAC Input
- IEC-320-C14 Input Receptacle
- Single Outputs from 5 to 48VDC
- 3000V Isolation
- Splash Proof Case



Model Number	Output Watts	Output Voltage	Output Amps	Total Regulation
SPU24-102	15	5V	3A	5%
SPU24-103	20	6V	3.33	5%
SPU24-104	22	10V	2.2A	5%
SPU24-105	24	12V	2A	5%
SPU24-106	24	15V	1.6A	5%
SPU24-107	24	18V	1.33A	5%
SPU24-108	24	24V	1A	3%
SPU24-109	24	30V	0.8A	3%
SPU24-110	24	36V	0.66A	3%
SPU24-111	24	48V	0.5A	2%



INPUT SPECIFICATIONS

Input Voltage Range	90-264 VAC (Universal)	
Frequency Range	47-63 Hz	
Input Current	Low Line (115VAC)	0.7A
	High Line (230VAC)	0.46A
Inrush Current, typ (Cold Start)	Low Line (115VAC)	15A max.
	High Line (230VAC)	30A max.
Leakage Current	0.75mA MAX.	
	@ 240 VAC, FL	

OUTPUT SPECIFICATIONS

Voltage and Current	See Selection Charts	
Output Power Range	0 to FL Rating	
Load Regulation (230V _{in})	+/- 5%, max.	
Line Regulation	+/- 1%, max.	
Transient Response	100V _{in} , FL to 1/2L	4mS
Temperature Coefficient	+/-0.04%/°C, typ	
Ripple/Noise	FL, 90V _{in}	1% Pk-Pk, max.
Short Circuit Protection	Continuous, self-recovering *	
Start Up / Hold Up Time	100V _{in} , FL	2S max. / 12mS min.

NOTE: Low cost 3 Wire IEC320/C13 (Part Number ACCRD-C13) Input Power Cords are available for these products. Inquire to the Astrodyne Sales Depart.

GENERAL SPECIFICATIONS

Input-Out Isolation	3000 VAC
Input-Ground Isolation	1500 VAC
Isolation Resistance	50 Mohm min.
Efficiency (FL, 230V _{in})	75%, typ
Safety	(c)UL60950-1, EN60950


PHYSICAL SPECIFICATIONS

Size	4.2" x 2.6" x 1.2"
Construction	Desktop Style
Weight	7.6oz (215g)

ENVIRONMENTAL SPECIFICATIONS

Oper. Temperature	0 to +40°C (FL) *
	50% Load @ 70°C (See Derate Curve)
Storage Temperature	-40 to +85°C *
Relative Humidity	5% to 95%, non-cond *
EMC	110V _{in} : FCC Part 15 Class B
	220V _{in} : CISPR-22 Class B
MTBF	100,000 Hrs

DERATE CURVE

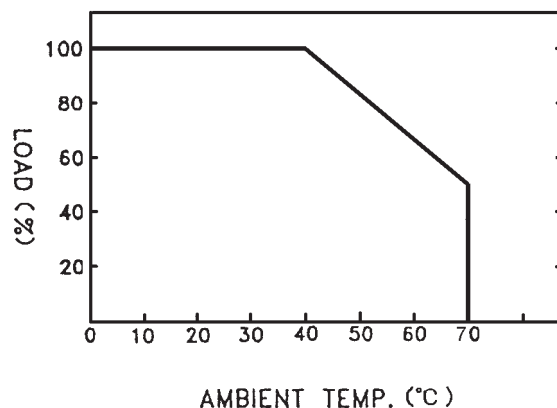

All specifications are typical at nominal input, full load, and 25°C unless otherwise noted

* These are stress ratings. Exposure of the devices to any of these conditions may adversely affect long term reliability. Proper operation under conditions other than the standard operating conditions is neither warranted nor implied.

Astrodyne products are not authorized or warranted for use as critical components in life support systems, equipment used in hazardous environments, nuclear controls systems, or other mission-critical applications.

MECHANICAL DIMENSIONS

