
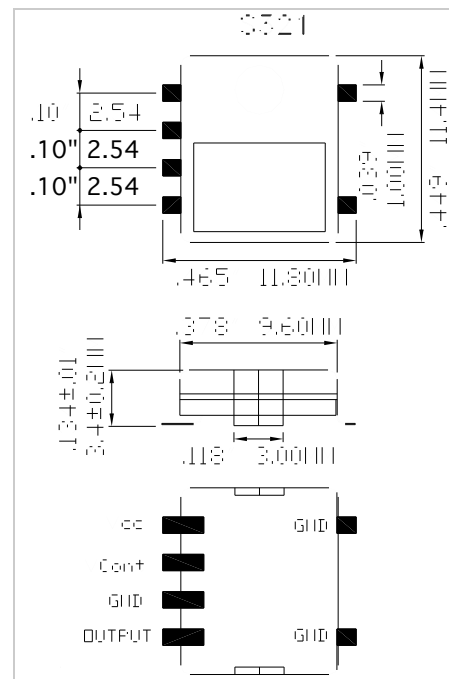


Features: 11.4 x 11.8 mm, Mechanical Trim, With or Without Voltage Control, Sinewave Output

PARAMETERS	ET191	ET192
Package Part#	S320	S321
Frequency Range (MHz)	12.0 ~ 26.0	
Frequency Stability vs Temp. (\pm ppm)	2.5	
vs Supply Voltage	0.2	
vs Aging	1.0	
Temperature Range ($^{\circ}$ C)	Operating - $-30 \sim +70$ / Operable - $-40 \sim +85$	
Supply Voltage (V)	$+5.0 \pm 5\%$	
Supply Current (mA)	2.0 Maximum	
Output Level (V)	1.0 p-p Minimum	
Load	10 K Ω / 10 pF	
Output Waveform	Clipped Sine	
Frequency Deviation (\pm ppm)	3.0 (Mechanical)	3.0 (Mechanical) / 15.0 (Electrical)
Control Voltage (V)	NA	$+0.5 \sim +4.5$

STANDARD AVAILABLE OPTIONS

Frequency Stability vs Temp. (\pm ppm): 1.0, 1.5, 2.0, 3.5, 4.0
 Operating Temp. Range ($^{\circ}$ C): $-20 \sim +70$, $-30 \sim +75$, $-40 \sim +85$

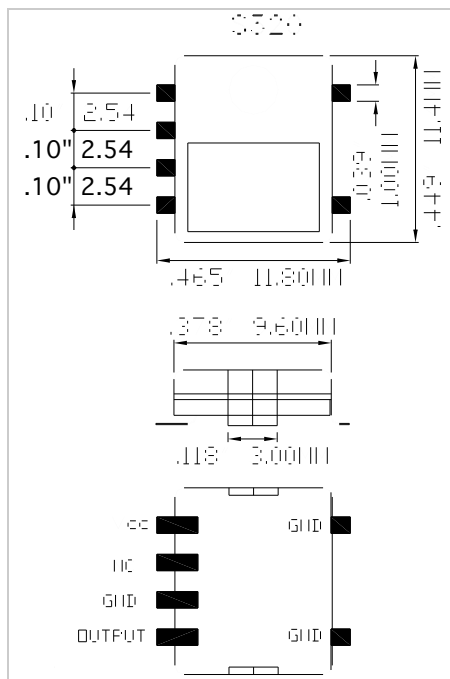

INFICON EDC Inc. • (800) EDC-XTAL • www.inficonedc.com

This drawing & information are the property of INFICON EDC Inc. and shall not be reproduced, copied or used in any manner without the sole permission of INFICON EDC Inc. All specification subject to change. Please contact factory for current specifications (Rev. 05/08)