

# SMD Inductors(Coils) For Power Line(Wound, Magnetic Shielded)

Conformity to RoHS Directive

## SLF Series SLF7032

### FEATURES

- The SLF series are characterized by low profile, low DC resistance, and high current handling capacities.
- Because they are magnetically shielded, these parts can be used in high-density mounting configurations.
- Flat bottom surface ensures secure, reliable mounting.
- Provided in embossed carrier tape packaging for use with automatic mounting machines.


### APPLICATIONS

Portable telephones, personal computers, hard disk drives, and other electronic equipment.

### SPECIFICATIONS

Operating temperature range	-20 to +85°C [Including self-temperature rise]
Storage temperature range	-40 to +85°C[Unit of products]

### RECOMMENDED REFLOW SOLDERING CONDITIONS

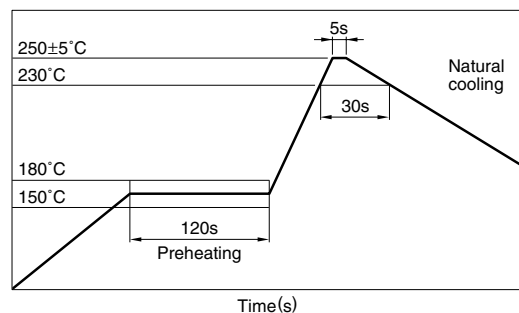

### PRODUCT IDENTIFICATION

SLF	7032	T-	220	M	R96	-2	PF
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)

(1) Series name

(2) Dimensions

7032 7.0×7.0×3.2mm (L×W×T)

(3) Packaging style

T Taping(reel)

(4) Inductance value

3R3	3.3μH
100	10μH

(5) Inductance tolerance

M ±20%

(6) Rated current

1R9	1.9A
R96	0.96A

(7) TDK internal code

Some products may not have this number.

(8) Lead-free compatible product

PF Lead-free compatible product


### PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	1000 pieces/reel

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

## SHAPES AND DIMENSIONS/RECOMMENDED PC BOARD PATTERN

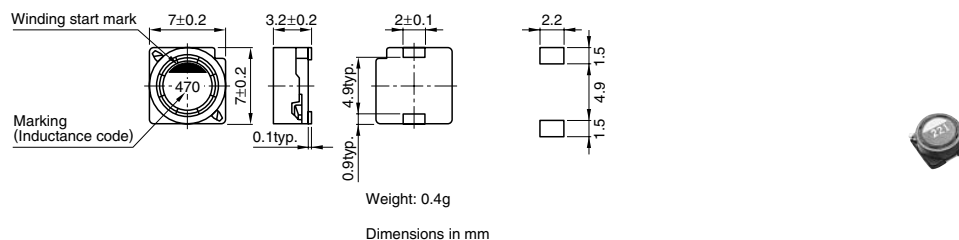


## ELECTRICAL CHARACTERISTICS

Inductance (μH)	Inductance tolerance	Test frequency L (kHz)	DC resistance (Ω)±20%	Rated current (A)max.	Part No.
3.3	±20%	100	0.023	1.9	SLF7032T-3R3M1R9-2PF
4.7	±20%	100	0.030	1.7	SLF7032T-4R7M1R7-2PF
6.8	±20%	100	0.041	1.6	SLF7032T-6R8M1R6-2PF
10	±20%	100	0.053	1.4	SLF7032T-100M1R4-2PF
15	±20%	100	0.075	1.1	SLF7032T-150M1R1-2PF
22	±20%	100	0.11	0.96	SLF7032T-220MR96-2PF
33	±20%	100	0.16	0.75	SLF7032T-330MR75-2PF
47	±20%	100	0.24	0.67	SLF7032T-470MR67-2PF
68	±20%	100	0.31	0.59	SLF7032T-680MR59-2PF
100	±20%	100	0.45	0.45	SLF7032T-101MR45-2PF
150	±20%	100	0.65	0.37	SLF7032T-151MR37-2PF
220	±20%	100	1.05	0.29	SLF7032T-221MR29-2PF
330	±20%	100	1.67	0.22	SLF7032T-331MR22-2PF
470	±20%	100	2.05	0.2	SLF7032T-471MR20-2PF
680	±20%	100	3.15	0.16	SLF7032T-681MR16-2PF
1000	±20%	100	4.78	0.13	SLF7032T-102MR13-2PF

- Test equipment L: 4194A IMPEDANCE/GAIN-PHASE ANALYZER HP, or equivalent (Measured at 100kHz/0.5V)  
Rdc:MATSUSHITA,VP-2941A DIGITAL MILLIOHM METER, or equivalent

## TYPICAL ELECTRICAL CHARACTERISTICS

### INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS

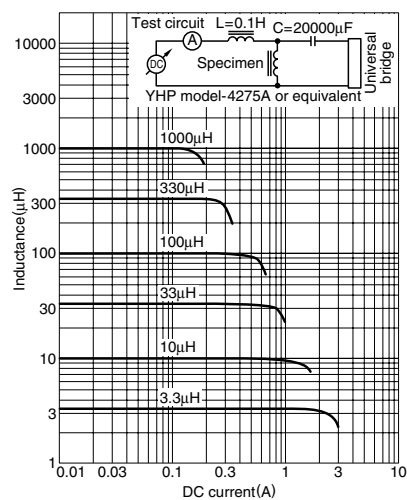

- All specifications are subject to change without notice.