


■ FEATURES

- 85°C, 1000 hours assured.
- 5 mm height.
- Suitable for use in circuits which have a reversed or unknown polarity.

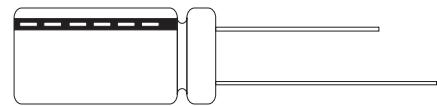

■ SPECIFICATIONS

Item	Performance									
Operating Temperature	-40° ~ +85°C									
Capacitance Tolerance	± 20% (120Hz, 20°C)									
Leakage Current (at 20°C)	I=0.05CV or 10 (μ A) whichever is greater (after 2 minutes) Where C= rated capacitance in μ F, V = rated DC workint voltage in V									
Dissipaton Factor Tan δ at 120 Hz, 20°C	Rated Voltage	4	6.3	10	16	25	35	50		
	Tan δ (max)	0.35	0.24	0.20	0.17	0.17	0.15	0.15		
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below.									
	Rated Voltage			4	6.3	10	16	25	35 50	
	Impedance Ratio	Z(-25°C)/Z(+20°C)	7	4	3	2	2	2	2	
		Z(-40°C)/Z(+20°C)	15	10	8	6	4	3	3	
Load Life Test at 20°C after rated voltage is applied for 1000 hours at 85°C	Test Time		1000 Hrs			Shelf Life Test at 20°C rated voltage applied for 500 hrs without voltage applied.	Test Time		500 Hrs	
	Capacitance	4 ~ 6.3V	$\leq I \pm 30\%$				Capacitance	4 ~ 6.3V	$\leq I \pm 30\%$	
	Change	10 ~ 50V	$\leq I \pm 25\%$				Change	10 ~ 50V	$\leq I \pm 25\%$	
	Dissipation Factor		Less than 200% of specified value.				Dissipation Factor	Less than 200% of specified value		
	Leakage Current		Within specified value				Leakage Current	Less than 200% of specified value		
Standards	Satisfies Characteristic W of JIS C 5141									


■ DIMENSIONS & PERMISSABLE RIPPLE CURRENT

Dimension ϕ DxL(mm); Ripple Current: mA/RMS at 120Hz 85°C

VDC μ F Contents	4V(OG)		6.3V(OJ)		10V(1A)		16V(1C)		25V(1E)		35V(1V)		50V(1H)			
	ϕ DXL	mA														
0.1 0R1														4 x 5	1.9	
0.22 R22														4 x 5	2.9	
0.33 R33														4 x 5	3.5	
0.47 R47														4 x 5	4.2	
1 10														4 x 5	6.1	
2.2 2R2														4 x 5	10	
3.3 3R3														5 x 5	13	
4.7 4R7							4 x 5	11	4 x 5	12	5 x 5	14	5 x 5	15	6.3 x 5	16
10 100	4 x 5	19	4 x 5	15	5 x 5	19	5 x 5	21	6.3 x 5	22	6.3 x 5	24				
22 220	5 x 5	23	5 x 5	26	6.3 x 5	31	6.3 x 5	33								
33 330	6.3 x 5	30	6.3 x 5	36	6.3 x 5	38										
47 470	6.3 x 5	36	6.3 x 5	41												

■ LEAD SPACING AND DIAMETER

ϕ D	4	5	6.3
P	1.5	2.0	2.5
ϕ d	0.45		
α	1.0		
β	0.5		

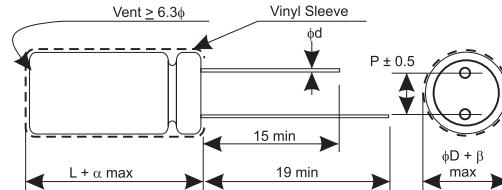

■ PART NUMBER EXAMPLE

SSN 010 M 1H BK 040 050