


Radiation	Type	Technology	Case
Infrared	ELD-770-524	AlGaAs/AlGaAs	5 mm plastic lens

**Description**

High-power, high-speed,  
double heterostructure with removed substrate,  
with standoff leads

**Applications**

Optical communications,  
safety equipment

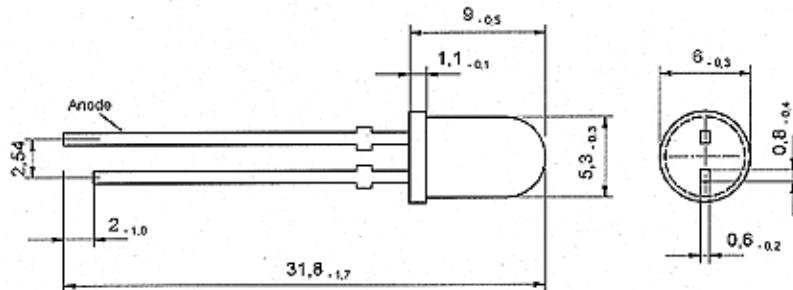

Note: Special packages without standoff available on request

**Maximum Ratings**

T<sub>amb</sub> = 25°C, unless otherwise specified

Parameter	Test conditions	Symbol	Value	Unit
Forward current (DC)		I <sub>F</sub>	50	mA
Peak forward current	(t <sub>P</sub> ≤ 50 µs, t <sub>P</sub> /T = 1/2)	I <sub>FM</sub>	100	mA
Surge forward current	(t <sub>P</sub> ≤ 10 µs)	I <sub>FSM</sub>	1000	mA
Reverse voltage	I <sub>R</sub> = 100 µA	V <sub>R</sub>	5	V
Operating temperature range		T <sub>amb</sub>	-20 to +100	°C
Storage temperature range		T <sub>stg</sub>	-55 to +100	°C
Mass		m	0.33	g

**Optical and Electrical Characteristics**

T<sub>amb</sub> = 25°C, unless otherwise specified

Parameter	Test conditions	Symbol	Min	Typ	Max	Unit
Forward voltage	I <sub>F</sub> = 50 mA	V <sub>F</sub>		1.6	2.1	V
Radiant power	I <sub>F</sub> = 50 mA	Φ <sub>e</sub>		10		mW
Radiant intensity	I <sub>F</sub> = 50 mA	I <sub>e</sub>		70		mW/sr
Peak wavelength	I <sub>F</sub> = 50 mA	λ <sub>p</sub>		770		nm
Spectral bandwidth at 50%	I <sub>F</sub> = 50 mA	Δλ <sub>0.5</sub>		30		nm
Viewing angle		φ		20		deg.
Switching time	I <sub>F</sub> = 50 mA	t <sub>r</sub> , t <sub>f</sub>		30/20		ns