


| Radiation | Type | Technology | Case |
|-----------|-------------|------------------|-------------------|
| Infrared | ELD-960-525 | AlGaAs/GaAs/GaAs | 5 mm plastic lens |

Description

High-power, high-speed,
heterostructure,
with standoff leads

Applications

Optical communications,
safety equipment

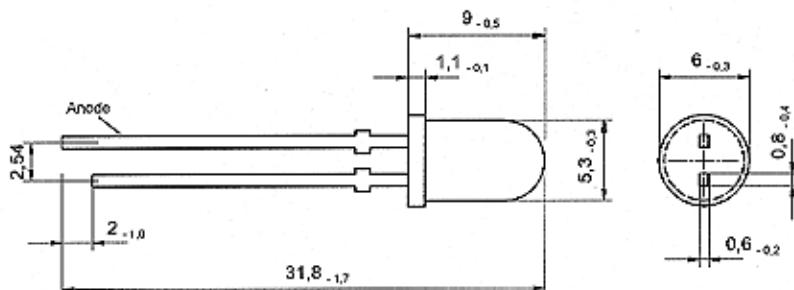

Note: Special packages without standoff available on request

Maximum Ratings

$T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified

| Parameter | Test conditions | Symbol | Value | Unit |
|-----------------------------|--|-----------|-------------|------|
| Forward current (DC) | | I_F | 100 | mA |
| Peak forward current | ($t_P \leq 50 \mu\text{s}$, $t_P/T = 1/2$) | I_{FM} | 200 | mA |
| Surge forward current | ($t_P \leq 10 \mu\text{s}$) | I_{FSM} | 2000 | mA |
| Reverse voltage | $I_R = 100 \mu\text{A}$ | V_R | 5 | V |
| Operating temperature range | | T_{amb} | -20 to +100 | °C |
| Storage temperature range | | T_{stg} | -55 to +100 | °C |
| Mass | | m | 0.33 | g |

Optical and Electrical Characteristics

$T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified

| Parameter | Test conditions | Symbol | Min | Typ | Max | Unit |
|---------------------------|------------------------|-----------------------|-----|------|-----|-------|
| Forward voltage | $I_F = 100 \text{ mA}$ | V_F | | 1.35 | | V |
| Radiant power | $I_F = 100 \text{ mA}$ | Φ_e | | 26 | | mW |
| Radiant intensity | $I_F = 100 \text{ mA}$ | I_e | | 130 | | mW/sr |
| Peak wavelength | $I_F = 100 \text{ mA}$ | λ_p | | 960 | | nm |
| Spectral bandwidth at 50% | $I_F = 100 \text{ mA}$ | $\Delta\lambda_{0.5}$ | | 55 | | nm |
| Viewing angle | | φ | | 20 | | deg. |
| Switching time | $I_F = 100 \text{ mA}$ | t_n, t_f | | 500 | | ns |