

# NEW

# LONG LIFE XENON LAMP SERIES

## 75 W: L10725/-01/-02, L10726/-01/-02 150 W: L11033, L11034

## OVERVIEW

Our long life xenon lamp series now have a drastically extended service life<sup>①</sup> compared to our previous lamps, thanks to the use of an innovative new electrode. This significant increase in service life helps reduce time-consuming maintenance tasks such as lamp replacement and lamp position alignment. Other benefits from using the long life xenon lamp include saving natural resources and a smaller burden on the environment.

① Guaranteed service life (75 W: twice that of our conventional models, 150 W: about 1.7 times that of our conventional models)



75 W Xenon Lamp

## FEATURES



- **Long Life** 75 W Xenon Lamp **Guaranteed Life: 2000 h**  
**Average Life : 3000 h**  
150 w Xenon Lamp **Guaranteed Life: 3000 h**  
**Average Life : 4000 h**
- **High Stability** Fluctuation (p-p): **0.2 % Typ. (1.0 % Max.)**  
Drift : **±0.5 %/h Typ.**
- **Point Light Source**

## APPLICATIONS



- **Semiconductor Inspection Equipment Light Source**
- **Scanner Light Sources**
- **Microscope Light Sources**
- **Spectrophotometer Light Sources**
- **High Performance Liquid Chromatograph (HPLC) Light Sources**

## LIGHT OUTPUT INTENSITY AND OPERATING TIME

### ● 75 W Xenon Lamp

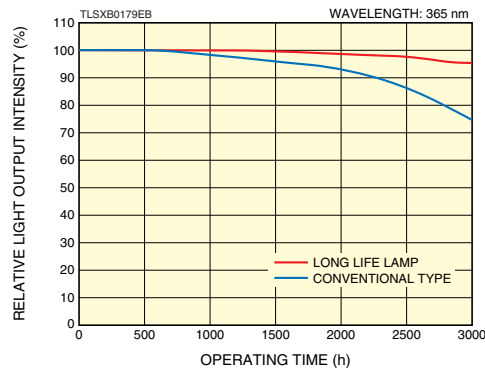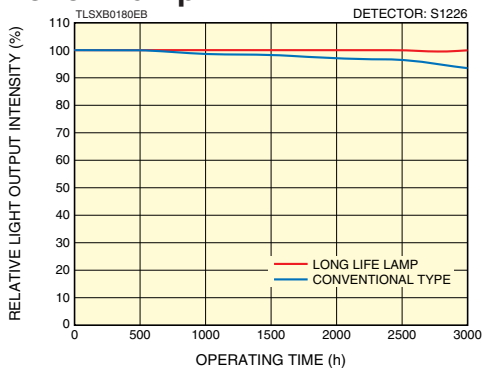

### ● 150 W Xenon Lamp

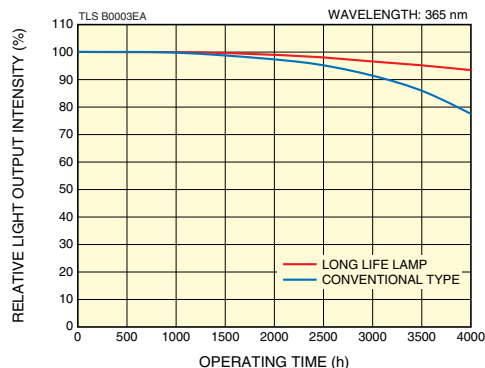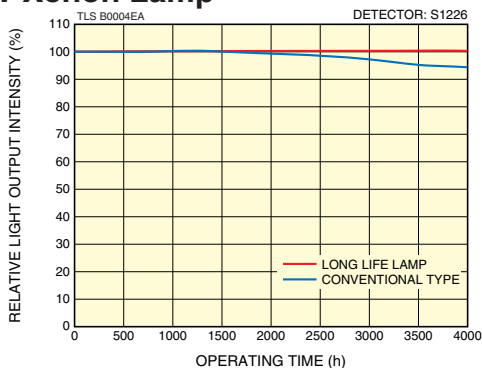


# HAMAMATSU

# SPECIFICATIONS

Parameter	Long Life Lamp 75 W		Long Life Lamp 150 W	
	L10725/-01/-02	L10726/-01/-02	L11033	L11034
Window Material (Transmission wavelength)	Fused Silica (185 nm to 2000nm)	Ozone-free Silica (240 nm to 2000nm)	Fused Silica (185 nm to 2000nm)	Ozone-free Silica (240 nm to 2000nm)
Lamp Rating	Approx. 75 W		Approx. 150 W	
Arc Length	1.0 mm ± 0.1 mm		2.0 mm ± 0.1 mm	
Lamp Current	5.7 A ± 0.3 A		8.5 A ± 0.5 A	
Lamp Voltage	Approx. 13.5 V		Approx. 17 V	
Light Output Stability	Fluctuation (p-p) (Max.)	1.0 %		
	Drift (Typ.)	±0.5 %/h		
Operating Guaranteed Life ②	2000 h		3000 h	
Average Life	3000 h		4000 h	
Orientation	Vertical ±15 degree or Horizontal ±15 degree			
Cooling Method	Convection Cooling			
Weight	Approx. 15 g		Approx. 45 g	


②The life end is defined as the time when the light output intensity falls to 50 % of its initial value or when the output fluctuation (p-p) exceeds 1.0 %

# SPECTRAL DISTRIBUTION (TYPICAL DATA: 75 W Xenon Lamp)

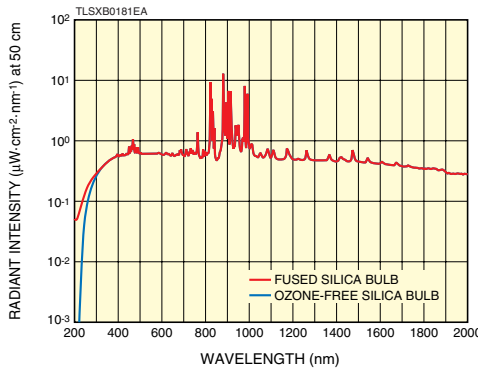


# DIMENSIONAL OUTLINES (Unit: mm)

L10725  
L10726

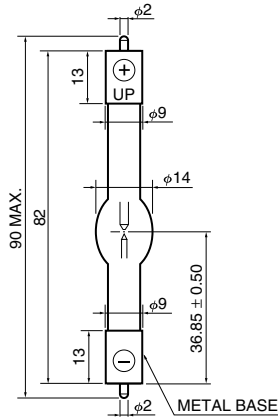


TLSXA0122EA

L10725-01  
L10726-01

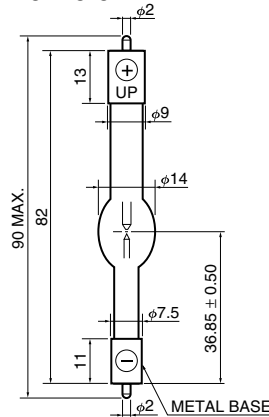


TLSXA0123EA

L10725-02  
L10726-02

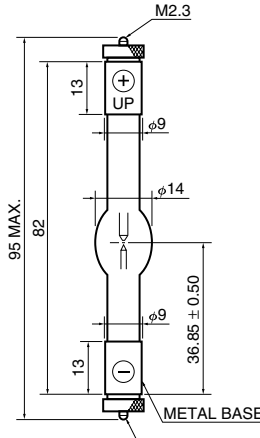

TLSXA0007EE

L11033  
L11034

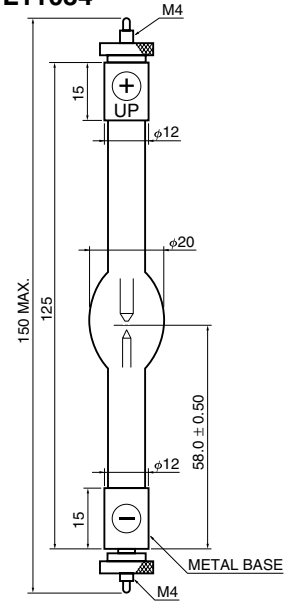

TLSXA0004EA

Subject to local technical requirements and regulations, availability of products included in this promotional material may vary. Please consult with our sales office. Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2009 Hamamatsu Photonics K.K.

# HAMAMATSU

WEB SITE [www.hamamatsu.com](http://www.hamamatsu.com)

HAMAMATSU PHOTONICS K.K., Electron Tube Division

314-5, Shimokanzo, Iwata City, Shizuoka Pref., 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P. O. Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: [usa@hamamatsu.com](mailto:usa@hamamatsu.com)

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658 E-mail: [info@hamamatsu.de](mailto:info@hamamatsu.de)

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: [infos@hamamatsu.fr](mailto:infos@hamamatsu.fr)

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road Welwyn Garden City Hertfordshire AL7 1BW, United Kingdom, Telephone: 44-(0)1707-294888, Fax: 44(0)1707-325777 E-mail: [info@hamamatsu.co.uk](mailto:info@hamamatsu.co.uk)

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171-41 SOLNA, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01 E-mail: [info@hamamatsu.se](mailto:info@hamamatsu.se)

Italy: Hamamatsu Photonics Italia: S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741 E-mail: [info@hamamatsu.it](mailto:info@hamamatsu.it)

TLSX1052E02  
OCT. 2009 IP