

## Small Signal Zener Diodes

### Features

- Very sharp reverse characteristic
- Low reverse current level
- Very high stability
- Low noise
- Lead (Pb)-free component
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



94 9367

### Applications

- Voltage stabilization

### Mechanical Data

**Case:** DO35 Glass case

**Weight:** approx. 125 mg

**Cathode Band Color:** black

**Packaging codes/options:**

TAP/10 k per Ammopack (52 mm tape), 30 k/box

### Absolute Maximum Ratings

$T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Power dissipation	$I = 4\text{ mm}$ , $T_L = 25\text{ }^{\circ}\text{C}$	$P_{tot}$	500	mW
Z-current		$I_Z$	$P_{tot}/V_Z$	mA
Junction temperature		$T_j$	175	$^{\circ}\text{C}$
Storage temperature range		$T_{stg}$	- 65 to + 175	$^{\circ}\text{C}$

### Thermal Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Thermal resistance junction to ambient air	$I = 4\text{ mm}$ , $T_L = \text{constant}$	$R_{thJA}$	300	K/W

### Electrical Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

Parameter	Test condition	Symbol	Min	Typ.	Max	Unit
Forward voltage	$I_F = 200\text{ mA}$	$V_F$			1.5	V



## Electrical Characteristics

Partnumber group	Partnumber	Zener Voltage		Dynamic Resistance	Test Current	Reverse Leakage Current			
		V <sub>Z</sub> at I <sub>Z</sub>		r <sub>Z</sub> at I <sub>Z</sub>	I <sub>Z</sub>	I <sub>R</sub>	at V <sub>R</sub>	I <sub>R</sub> <sup>1)</sup>	at V <sub>R</sub> <sup>1)</sup>
		V	V	Ω	mA	μA	V	μA	V
		min	max	max		max		max	
TZX2V4	TZX2V4A	2.3	2.5	100	5	5	0.5	50	1
	TZX2V4B	2.4	2.6	100	5	5	0.5	50	1
TZX2V7	TZX2V7A	2.5	2.7	100	5	5	0.5	10	1
	TZX2V7B	2.6	2.8	100	5	5	0.5	10	1
	TZX2V7C	2.7	2.9	100	5	5	0.5	10	1
TZX3V0	TZX3V0A	2.8	3	100	5	5	0.5	6	1
	TZX3V0B	2.9	3.1	100	5	5	0.5	6	1
	TZX3V0C	3	3.2	100	5	5	0.5	6	1
TZX3V3	TZX3V3A	3.1	3.3	100	5	5	1	2	1
	TZX3V3B	3.2	3.4	100	5	5	1	2	1
	TZX3V3C	3.3	3.5	100	5	5	1	2	1
TZX3V6	TZX3V6A	3.4	3.6	100	5	5	1	2	1
	TZX3V6B	3.5	3.7	100	5	5	1	2	1
	TZX3V6C	3.6	3.8	100	5	5	1	2	1
TZX3V9	TZX3V9A	3.7	3.9	100	5	5	1	2	1
	TZX3V9B	3.8	4	100	5	5	1	2	1
	TZX3V9C	3.9	4.1	100	5	5	1	2	1
TZX4V3	TZX4V3A	4	4.2	100	5	5	1.5	1	1
	TZX4V3B	4.1	4.3	100	5	5	1.5	1	1
	TZX4V3C	4.2	4.4	100	5	5	1.5	1	1
	TZX4V3D	4.3	4.5	100	5	5	1.5	1	1
TZX4V7	TZX4V7A	4.4	4.6	100	5	5	2	6	2
	TZX4V7B	4.5	4.7	100	5	5	2	5	2
	TZX4V7C	4.6	4.8	100	5	5	2	4	2
	TZX4V7D	4.7	4.9	100	5	5	2	3	2
TZX5V1	TZX5V1A	4.8	5	100	5	5	2	2	2
	TZX5V1B	4.9	5.1	100	5	5	2	2	2
	TZX5V1C	5	5.2	100	5	5	2	2	2
	TZX5V1D	5.1	5.3	100	5	5	2	2	2
TZX5V6	TZX5V6A	5.2	5.5	40	5	5	2	1	2
	TZX5V6B	5.3	5.6	40	5	5	2	1	2
	TZX5V6C	5.4	5.7	40	5	5	2	1	2
	TZX5V6D	5.5	5.8	40	5	5	2	1	2
	TZX5V6E	5.6	5.9	40	5	5	2	1	2
TZX6V2	TZX6V2A	5.7	6	15	5	1	3	3	4
	TZX6V2B	5.8	6.1	15	5	1	3	3	4
	TZX6V2C	6	6.3	15	5	1	3	3	4
	TZX6V2D	6.1	6.4	15	5	1	3	3	4
	TZX6V2E	6.3	6.6	15	5	1	3	3	4
TZX6V8	TZX6V8A	6.4	6.7	15	5	1	3.5	2	4
	TZX6V8B	6.6	6.9	15	5	1	3.5	2	4
	TZX6V8C	6.7	7	15	5	1	3.5	2	4
	TZX6V8D	6.9	7.2	15	5	1	3.5	2	4



Partnumber group	Partnumber	Zener Voltage		Dynamic Resistance	Test Current	Reverse Leakage Current			
		V <sub>Z</sub> at I <sub>Z</sub>		r <sub>Z</sub> at I <sub>Z</sub>	I <sub>Z</sub>	I <sub>R</sub>	at V <sub>R</sub>	I <sub>R</sub> <sup>1)</sup>	at V <sub>R</sub> <sup>1)</sup>
		V	V	Ω	mA	μA	V	μA	V
		min	max	max		max		max	
TZX7V5	TZX7V5A	7	7.3	15	5	1	5	30	6.65
	TZX7V5B	7.2	7.6	15	5	1	5	30	6.84
	TZX7V5C	7.3	7.7	15	5	1	5	30	6.94
	TZX7V5D	7.5	7.9	15	5	1	5	30	7.13
	TZX7V5X	7.07	7.45	15	5	1	5	30	6.72
TZX8V2	TZX8V2A	7.7	8.1	20	5	1	6.2	0.1	7.32
	TZX8V2B	7.9	8.3	20	5	1	6.2	0.1	7.5
	TZX8V2C	8.1	8.5	20	5	1	6.2	0.1	7.7
	TZX8V2D	8.3	8.7	20	5	1	6.2	0.1	7.98
TZX9V1	TZX9V1A	8.5	8.9	20	5	1	6.8	0.04	8.08
	TZX9V1B	8.7	9.1	20	5	1	6.8	0.04	8.27
	TZX9V1C	8.9	9.3	20	5	1	6.8	0.04	8.46
	TZX9V1D	9.1	9.5	20	5	1	6.8	0.04	8.65
	TZX9V1E	9.3	9.7	20	5	1	6.8	0.04	8.84
TZX10	TZX10A	9.5	9.9	25	5	1	7.5	0.04	9.03
	TZX10B	9.7	10.1	25	5	1	7.5	0.04	9.22
	TZX10C	9.9	10.3	25	5	1	7.5	0.04	9.41
	TZX10D	10.2	10.6	25	5	1	7.5	0.04	9.69
TZX11	TZX11A	10.4	10.8	25	5	1	8.2	0.04	9.88
	TZX11B	10.7	11.1	25	5	1	8.2	0.04	10.2
	TZX11C	10.9	11.3	25	5	1	8.2	0.04	10.4
	TZX11D	11.1	11.6	25	5	1	8.2	0.04	10.5
TZX12	TZX12A	11.4	11.9	35	5	1	9.5	0.04	10.8
	TZX12B	11.6	12.1	35	5	1	9.5	0.04	11
	TZX12C	11.9	12.4	35	5	1	9.5	0.04	11.3
	TZX12D	12.2	12.7	35	5	1	9.5	0.04	11.6
	TZX12X	11.44	12.03	35	5	1	9.5	0.04	10.9
TZX13	TZX13A	12.4	12.9	35	5	1	10	0.04	11.8
	TZX13B	12.6	13.1	35	5	1	10	0.04	12
	TZX13C	12.9	13.4	35	5	1	10	0.04	12.3
TZX14	TZX14A	13.2	13.7	35	5	1	11	0.04	12.5
	TZX14B	13.5	14	35	5	1	11	0.04	12.8
	TZX14C	13.8	14.3	35	5	1	11	0.04	13.1
TZX15	TZX15A	14.1	14.7	40	5	1	11.5	0.04	13.4
	TZX15B	14.5	15.1	40	5	1	11.5	0.04	13.8
	TZX15C	14.9	15.5	40	5	1	11.5	0.04	14.2
	TZX15X	14.35	15.09	40	5	1	11.5	0.04	13.6
TZX16	TZX16A	15.3	15.9	45	5	1	12	0.04	14.5
	TZX16B	15.7	16.5	45	5	1	12	0.04	14.9
	TZX16C	16.3	17.1	45	5	1	12	0.04	15.5
TZX18A	TZX18A	16.9	17.7	55	5	1	13	0.04	16.1
	TZX18B	17.5	18.3	55	5	1	13	0.04	16.6
	TZX18C	18.1	19	55	5	1	13	0.04	17.2
TZX20A	TZX20A	18.8	19.7	60	2	1	15	0.04	17.9
	TZX20B	19.5	20.4	60	2	1	15	0.04	18.5
	TZX20C	20.2	21.2	60	2	1	15	0.04	19.2

Partnumber group	Partnumber	Zener Voltage		Dynamic Resistance	Test Current	Reverse Leakage Current			
		$V_Z$ at $I_Z$		$r_Z$ at $I_Z$	$I_Z$	$I_R$	at $V_R$	$I_R^{(1)}$	at $V_R^{(1)}$
		V	V	$\Omega$	mA	$\mu A$	V	$\mu A$	V
		min	max	max		max		max	
TZX22	TZX22A	20.9	21.9	65	2	1	17	0.04	19.9
	TZX22B	21.6	22.6	65	2	1	17	0.04	20.5
	TZX22C	22.3	23.3	65	2	1	17	0.04	21.2
TZX24	TZX24A	22.9	24	70	2	1	19	0.04	21.8
	TZX24B	23.6	24.7	70	2	1	19	0.04	22.4
	TZX24C	24.3	25.5	70	2	1	19	0.04	23.1
	TZX24X	22.61	23.77	70	2	1	19	0.04	21.5
TZX27	TZX27A	25.2	26.6	80	2	1	21	0.04	23.9
	TZX27B	26.2	27.6	80	2	1	21	0.04	24.9
	TZX27C	27.2	28.6	80	2	1	21	0.04	25.8
	TZX27X	26.99	28.39	80	2	1	21	0.04	25.6
TZX30	TZX30A	28.2	29.6	100	2	1	23	0.04	26.8
	TZX30B	29.2	30.6	100	2	1	23	0.04	27.7
	TZX30C	30.2	31.6	100	2	1	23	0.04	28.7
	TZX30X	29.02	30.51	100	2	1	23	0.04	27.6
TZX33	TZX33A	31.2	32.6	120	2	1	25	0.04	29.6
	TZX33B	32.2	33.6	120	2	1	25	0.04	30.6
	TZX33C	33.2	34.5	120	2	1	25	0.04	31.5
TZX36	TZX36A	34.2	35.7	140	2	1	27	0.04	32.5
	TZX36B	35.3	36.8	140	2	1	27	0.04	33.5
	TZX36C	36.4	38	140	2	1	27	0.04	34.6
	TZX36X	35.36	37.19	140	2	1	27	0.04	33.6

<sup>1)</sup> Additional measurement

NOTE: Additional measurement of voltage group TZX9V1 to TZX36,  $I_R$  at 95 %  $V_{Zmin} \leq 40$  nA at  $T_j = 25$  °C

## Typical Characteristics

$T_{amb} = 25$  °C, unless otherwise specified

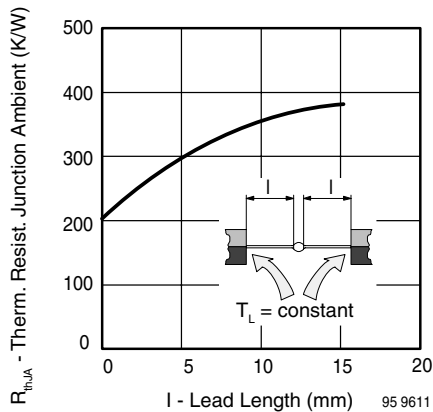


Figure 1. Thermal Resistance vs. Lead Length

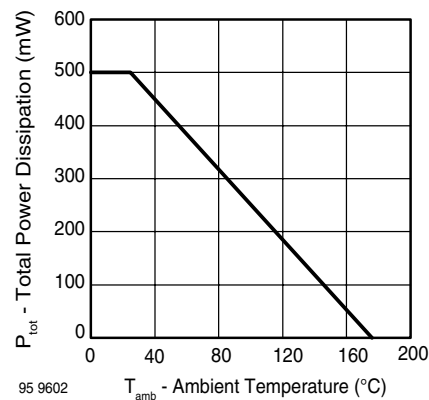


Figure 2. Total Power Dissipation vs. Ambient Temperature

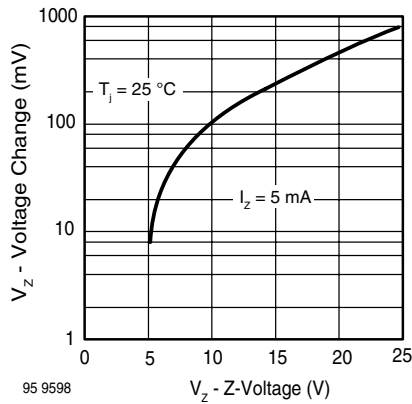


Figure 3. Typical Change of Working Voltage under Operating Conditions at  $T_{amb} = 25\text{ }^{\circ}\text{C}$

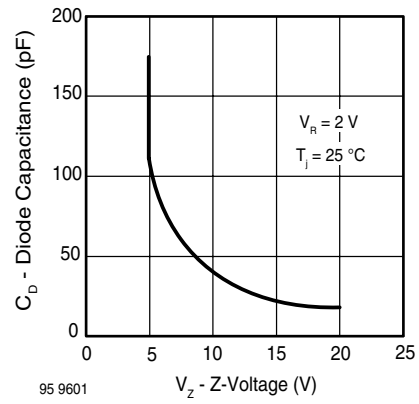


Figure 6. Diode Capacitance vs. Z-Voltage

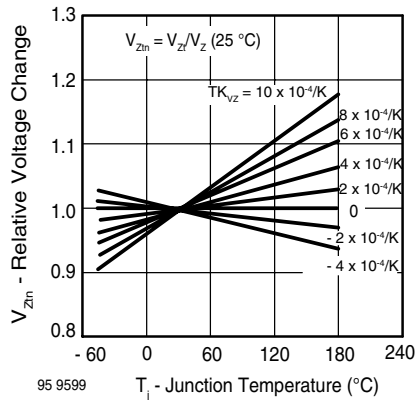


Figure 4. Typical Change of Working Voltage vs. Junction Temperature

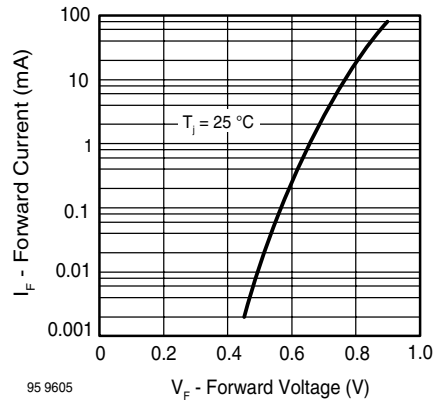


Figure 7. Forward Current vs. Forward Voltage

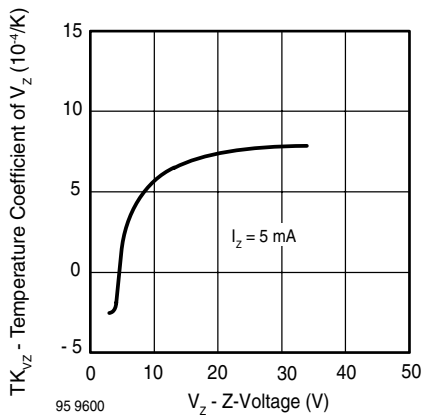


Figure 5. Temperature Coefficient of  $V_z$  vs. Z-Voltage

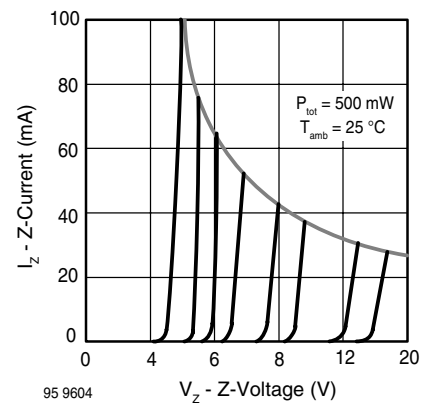


Figure 8. Z-Current vs. Z-Voltage

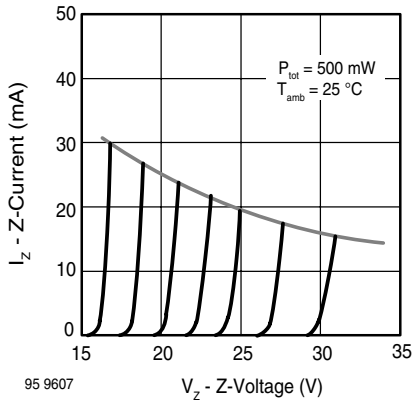


Figure 9. Z-Current vs. Z-Voltage

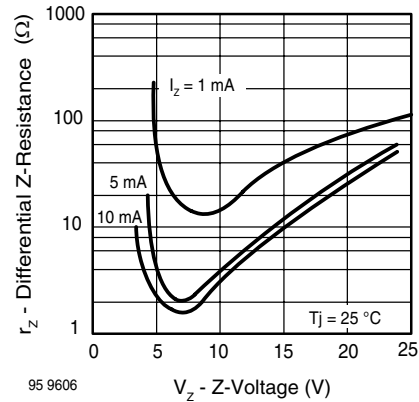


Figure 10. Differential Z-Resistance vs. Z-Voltage


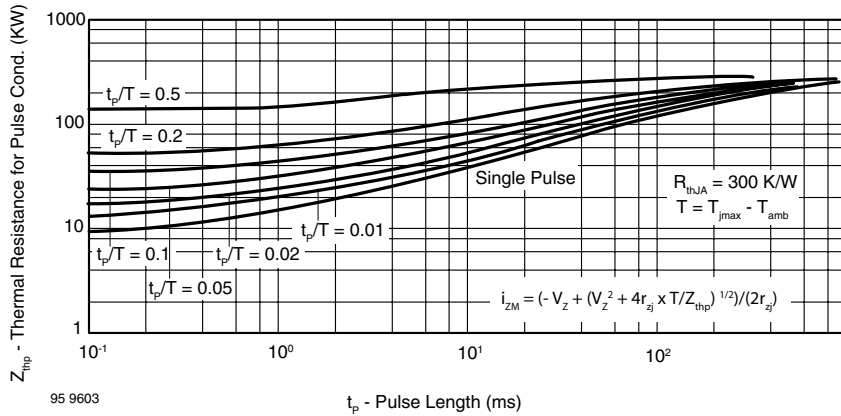


Figure 11. Thermal Response

## Package Dimensions in millimeters (inches): DO35



Rev. 6 - Date: 29. January 2007  
 Document no.: 6.560-5004.02-4  
 94 9366

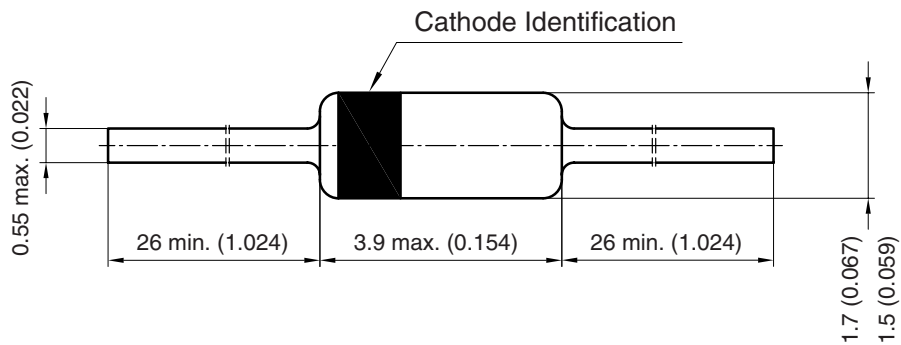

## Ozone Depleting Substances Policy Statement

It is the policy of Vishay Semiconductor GmbH to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Vishay Semiconductor GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Vishay Semiconductor GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design  
and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay Semiconductors products for any unintended or unauthorized application, the buyer shall indemnify Vishay Semiconductors against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.