



CERAMIC FILTER FOR COMMUNICATION

通信设备用陶瓷滤波器

LT450/455□W



⊕ DIMENSIONS(Unit:mm) 外形尺寸

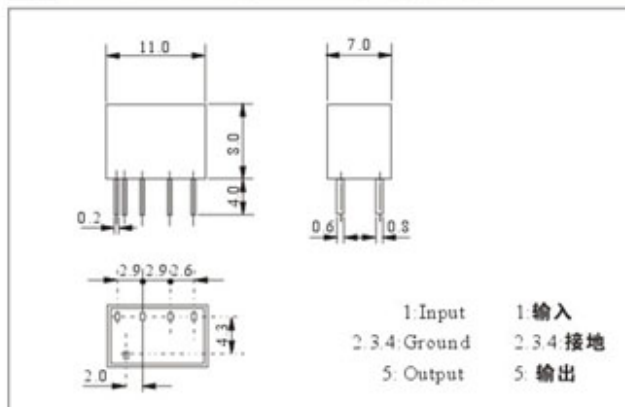

⊕ PRINCIPAL PARAMETERS 主要参数

Model 型号	6dB Band Width 6分贝带宽 (KHz) min	Selectivity 选择性		Stop Band Att 450/455 ±100KHz 阻带衰减 (dB) min	Insertion Loss 插入损耗 (dB) max	Input/Output Impedance 输入/输出阻抗 (KΩ)
		Att Band Width 衰减带宽 (KHz)max	Att Specified 保证衰减量 (dB)min			
LT450/455BW	±15	±30	50	40	4	1.5
LT450/455CW	±12.5	±24				
LT450/455DW	±10	±20				
LT450/455EW	±7.5	±15				
LT450/455FW	±6	±12.5		60	6	2
LT450/455GW	±4.5	±10				
LT450/455HW	±3	±9				
LT450/455IW	±2	±7.5				
LT450/455HTW	±3	±9				
LT450/455ITW	±2	±7.5				

⊕ TEST CIRCUIT 测量线路

